



4



3

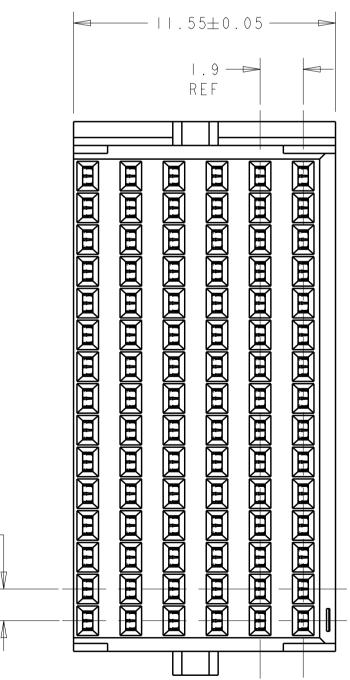



	2				1				
LOC	DIST	REVISIONS							
АD	00	Р	LTR	DESCRIPTION		DATE	DWN	APVD	
			С	REVISED PER ECO-13-002771		22FEB2013	КН	RP	
			D	REVISED PER ECO-19-012987		23AUG2019	ΑP	SY	

CONTACT AND SHIELD - PHOS BRONZE HOUSING AND CHICKLET - LCP, UL 94V-0, COLOR - BLACK

INISH: CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS

OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY

LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).

COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL. SHIELD 1.27µm MIN NICKEL.

3 CONNECTOR MARKED ON EITHER SIDE OF HOUSING WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN.

A DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.

5 datums and basic dimensions established by customer.

6. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE I, NOVEMBER 1995.

REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

A THE GROUNDS IN EACH COLUMN ARE COMMONED.

SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIAMATE AREA

NTROLLED DOCUMENT.	dwn 31JAN2007 S.MAGARO		
	снк ЗIJAN2007 W.DAVIS	- TE	TE Connectivity
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 08APR2009		
) PLC ±-	R.PATTERSON product spec		LE ASSEMBLY, , 6 COLUMN
1 PLC ±- 2 PLC ±-	-	JIAIN	
3 PLC ±- 4 PLC ±-	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	RESTRICTED T
ANGLES <u>+</u> - FINISH	- WEIGHT		
	WEIGHT _	A   00779 C - 193	4219
- /2	CUSTOMER DRAWING	S	scale 6:1 sheet of Rev D

D

В

|9342|9-|

PART NUMBER