

## Housing - HC-D 15-KML-48/M1PG16 - 1674639

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Coupling housing, with single locking latch, height 48 mm, with screw connection, 1x Pg16



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	141.57 g
Country of origin	Germany

### Technical data

#### Dimensions

Height	48 mm
Width	29.5 mm
Length	63 mm
Wrench size, union nut	22 mm
External cable diameter	7.5 mm ... 15 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-D15, A10
Size	D15
Housing type	Coupling housings
Locking type	With single locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	with

# Housing - HC-D 15-KML-48/M1PG16 - 1674639

## Technical data

### General

Type of the screw connection	1x Pg16
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	Steel, galvanized

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Approvals

### Approvals

---

Approvals

EAC / GL

# Housing - HC-D 15-KML-48/M1PG16 - 1674639

## Approvals

---

Ex Approvals

---

Approvals submitted

---


## Approval details

EAC
-----

GL
----

## Drawings

Dimensional drawing

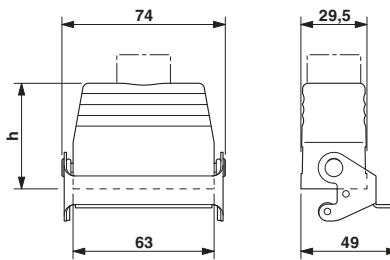

Dimensional drawing

---