


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	W ± .02 [0,5]	H ± .02 [0,5]	MAX WIRE INSULATION DIA.	
EDNF10-250FI	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.95 [24,1]	.36 [9,1]	.27 [6,9]	.22 [5,6]	CT-100A CT-460 CT-550 CT-600-A CT-1551 CT-2500

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - STRANDED COPPER WIRE ONLY
 - 600V MAX VOLTAGE RATING
 - 257°F (125°C) MAX TEMP RATING
- MATERIAL:
 - STAMPING - BRASS, TIN PLATED
 - SLEEVE - COPPER OR BRASS, TIN PLATED
 - HOUSING - NYLON 6/6, COLOR IS TRANSLUCENT
- WIRE STRIP LENGTH $9/32'' \begin{matrix} +1/32 \\ -0 \end{matrix}$ [7.1mm $\begin{matrix} +0.8 \\ -0 \end{matrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

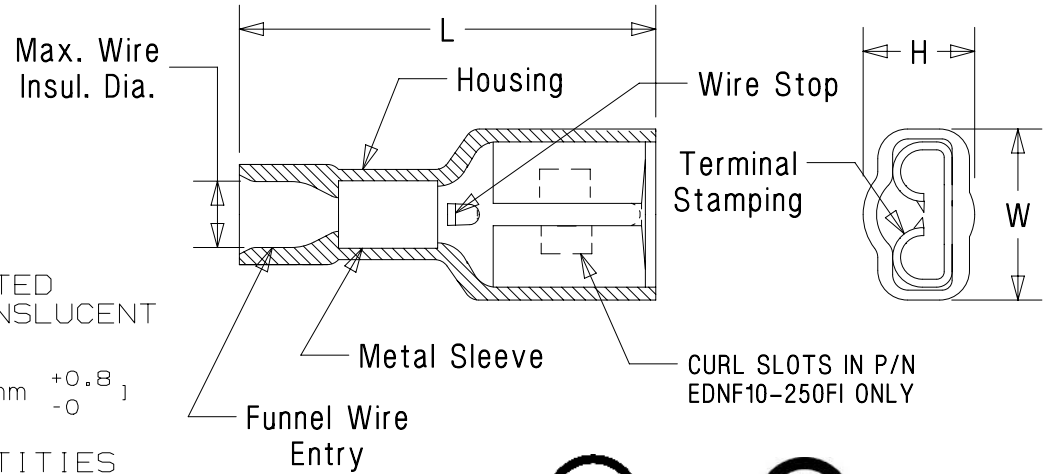

LISTED
20H3
E78522



CERTIFIED
LR31212

TITLE
STRONGHOLD FEMALE DISCONNECTS (250 SERIES)
FULLY INSULATED NYLON, METAL SLEEVE #12-10 AWG

CUSTOMER DRAWING

ITEM REVISION NAME


00123SHG/00

DATASET FILE NAME

00123SHG/00

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °



THIRD ANGLE
PROJECTION

MATERIAL:

SEE NOTES

DRAWING NUMBER:

SH41672

00	2/18	JHNU	TMR	RGB	RELEASED	00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	02/18	TMR	NTS	A

SHT 1 OF 1

PANDUIT