


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	DIMENSIONS in. [mm]		
		L ± .02 [0,51]	B DIA. ± .01 [0,25]	C ± .01 [0,25]
ES18B	#22-18 [0,5-1,0]	.62 [15,7]	.14 [3,6]	.032 [0,81]
ES14B	#16-14 [1,5-2,5]	.62 [15,7]	.16 [4,1]	.032 [0,81]
ES10B	#12-10 [4,0-6,0]	.63 [16,0]	.22 [5,6]	.040 [1,02]

NOTES:

- USED FOR:
 - A. SOLID OR STRANDED COPPER WIRE
 - B. 302°F [150°C] MAX TEMPERATURE RATING
 - C. 2000V MAX VOLTAGE
- INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED:
CT-100A, CT-200, CT-600A (CT-570CH),
CT-1570, CT-2500 (CT-2570CH)
 - B. PANDUIT APPROVED: CT-160, CT-260
- WIRE STRIP LENGTH: 9/32" ^{+1/32}₋₀ [7,1mm ^{+0,8}₋₀]
- MATERIAL: COPPER, TIN PLATED
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

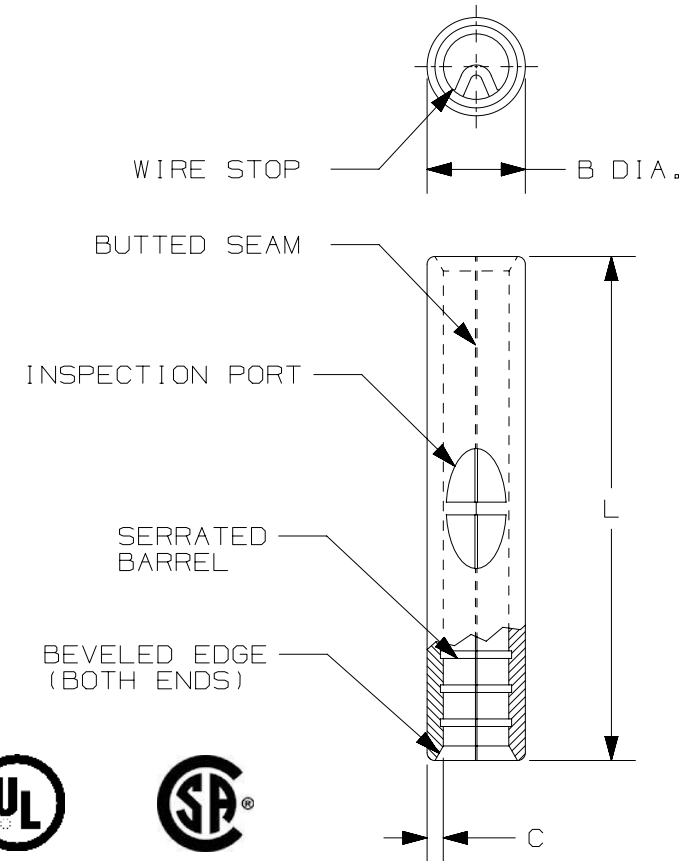

LISTED
587H
E52164



CERTIFIED
LR31212

B

B



A

A

TITLE		STRONGHOLD BUTT SPLICE NON-INSULATED, BUTTED SEAM #22-10 AWG		
		CUSTOMER DRAWING		
ITEM REVISION NAME		00123SHB/00		
DATASET FILE NAME		00123SHB_DC/00A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT TM		
.x ± .1 [2.54] .xxx ± .005 [.13] .xx ± .01 [.25] ANGLES ± 5 °				
DRAWING NUMBER:		SH41338		
DRAWN BY		DATE		SCALE
TMR		10.5.17		JHNU N.T.S
REV		DATE		DESCRIPTION
00		10.5.17		TMR JHNU RGB DRAWING RELEASED
ECN		00123SH		
SHEET 1 OF 1		A		

D10100DA/12