

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR <sup>*</sup>	RFF-1401-D			
REV	DESCRIPTION	DWN	DATE	APPROVED
_	ENGINEERING RELEASE	CZS	4/25/06	JDMc

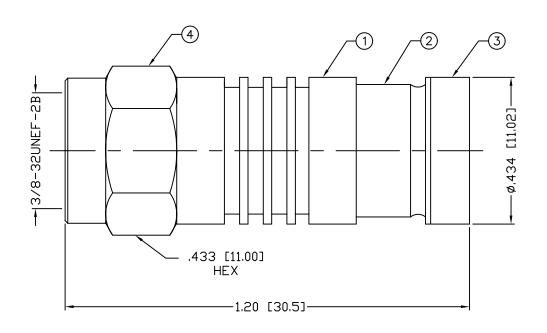



RECOMMENDED STRIPPING DIMENSIONS USE RFA-4004-20 CRIMP TOOL

## **SPECIFICATIONS:**

IMPEDANCE: 75 Ohms

FREQUENCY RANGE: SEE CABLE

MANUFACTURER SPECS

FOR RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062, 9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204, 9228; CANARE LV-61S; CommScope 5555, 5560, 5563

1 BODY **BRASS** NICKEL.  $100 \mu$ " 2 COMPRESSION PLASTIC 3 RING 1 BRASS NICKEL,  $100 \mu$ 4 SHELI 1 BRASS NICKEL,  $100 \mu$ 4/25/06 C. ZUNIGA CHECKED ORJ DRAWN 0/21/04 C. ZUNIGA **DESCRIPTION** QTY MATERIAL FINISH **APPROVALS** DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE:

**DECIMALS** DIAMETER DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX

## F PLUG

COMPRESSION CLAMP, WATERPROOF

CABLE GROUP SIZE REV RFF-1401-D

CAD FILE SCALE: NTS

OUTLINE

SHEET 1 OF