

**Ratings**

Temperature: -25~80 °C  
 Flammability: FT2

**Twisted Pair (3PR)**

Voltage: 30 V  
 Gauge: 28 AWG 0.09 mm<sup>2</sup>  
 Color: green/white, blue/white, orange/white  
 Conductor: tinned copper strands,  $\varnothing 0.127 \times 7$   
 Conductor resistance at 20 °C: 239  $\Omega$  /km max  
 Insulation  
 Material: foamed PE  
 Diameter:  $\varnothing 0.85 \pm 0.1$   
 Thickness: 0.23 mm nominal  
 Resistance at 20 °C: 10 M $\Omega$  /km min  
 Twisted pair characteristic impedance: 100  $\Omega$

**Power Wire (2C)**

Voltage: 300 V  
 Gauge: 22 AWG 0.35 mm<sup>2</sup>  
 Color: red (power), black (ground)  
 Conductor: tinned copper strands,  $\varnothing 0.127 \times 26$   
 Conductor resistance at 20 °C: 59.4  $\Omega$  /km max  
 Insulation  
 Material: SR-PVC, 90A  
 Diameter:  $\varnothing 1.35 \pm 0.1$   
 Thickness: 0.3 mm nominal  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Power marking:** E339579 UL AWM STYLE 1061 80°C 300V --- cUL AWM I A 80°C 300V FT2 TENSILITY

**Shield**

Type: aluminium mylar + tinned copper braid  
 Stranding:  $\varnothing 0.08$   
 Coverage: 65% min braid, 100% foil

**Drain**



Stranding:  $\varnothing 0.08 \times 19$   
 Material: tinned copper strands

**Outer jacket**

Material: PVC, 79A  
 Color: black  
 Style: round  
 Diameter:  $\varnothing 6.2 \pm 0.3$   
 Nominal thickness: 0.9 mm

**Jacket marking:** E339579 UL AWM STYLE 2725

28AWG/3P+22AWG/2C 80°C 30V --- cUL AWM I/II A 80°C 30V FT2 TENSILITY

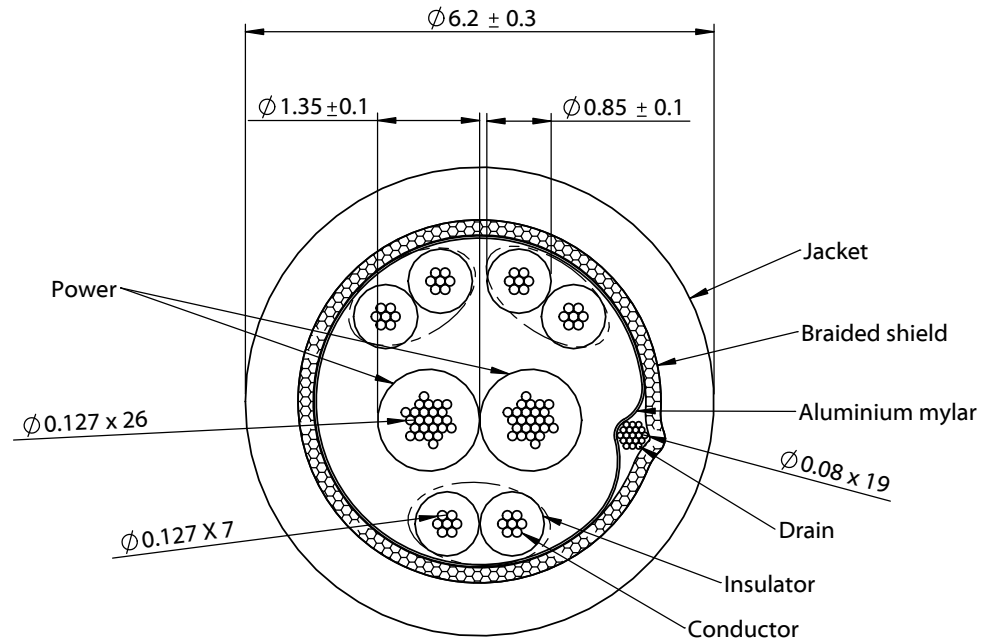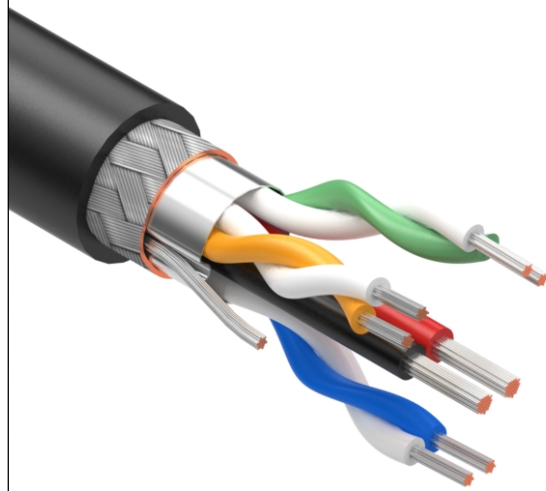

Revision:	Date:	Description:
A	2/28/22	Initial release

Prepared:	JD <small>Digitally signed by JD Date: 2023.04.25 11:15:58 -0700'</small>
Verified:	PB <small>Digitally signed by PB Date: 2023.04.25 12:58:37 -0700'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	

Notes:	RoHS compliant
Function test:	no open, no short circuit, no intermittent
Description:	Wire, 3PR TS 28 AWG, 2C TS 22 AWG, UL2725, 30V, 80C, 6.2 mm, shielded, FT2, PVC

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	30-02486
Scale: 10:1	Sheet 1 of 1

5

4

3

2

1