METRIC | 3rd ANGLE PROJECTION | NUMBER C-175472

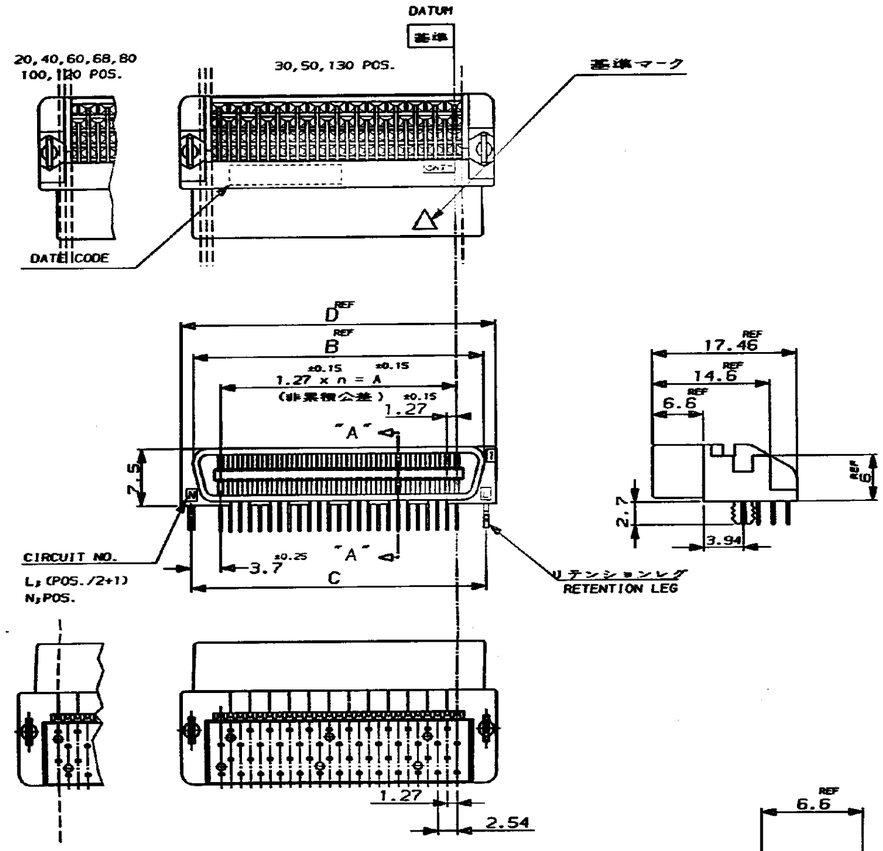

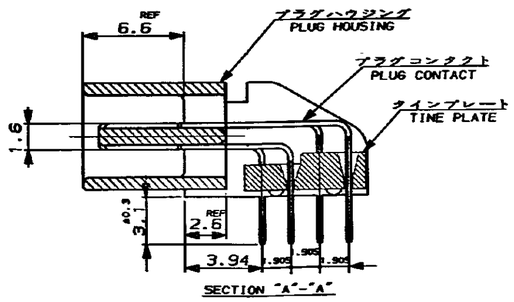

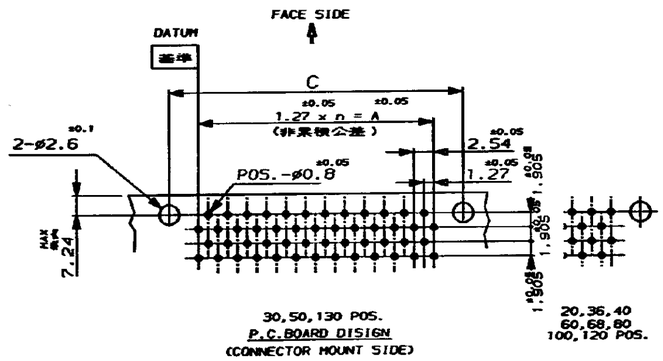

注記：
1.基板及びコネクタのｎ数は、 基準 位置から数える。
(-AMPマーク側が回路番号1番となる。)
2.材料：※ハウジング：ガラス入り66ナイロン
(UL 94V-0) 色、黒。
※コンタクト：燐青銅。
※リテンションレグ：黄銅。
3.表面仕上げ：
※コンタクト：全面1.3μ以上のニッケル下地メッキ
に接触部金メッキ(表参照)脚部1μ以上の半田
メッキ
※リテンションレグ：1.3μ以上のニッケル下地メッキ
に2μ以上の半田メッキ。

NOTE
1.NUMBER "n" IS COUNTED FROM DATUM
(CIRCUIT NO.1 IS "AMP" MARK SIDE.)
2.MATERIAL:HOUSING,66 NYLON(GF) UL 94V-0,BLACK.
:CONTACT;PHOSPHOR BRONZE.
:RETENTION LEG;BRASS.
3.FINISH:CONTACT;Au AT CONTACT AREA (SEE TABLE),TIN LEAD AT TINE
OVER Ni.
RETENTION LEG;TIN LEAD UNDER Ni.

6-	-2		130	64	81.28	89.62	88.68	92.48
6-	-1		120	59	74.93	83.27	82.33	86.13
6-	-0		100	49	62.23	70.57	69.63	73.43
5-	-9		80	39	49.53	57.87	56.93	60.73
5-	-8		68	33	41.91	50.25	49.31	53.11
5-	-7		60	29	36.83	45.17	44.23	48.03
5-	-6		50	24	30.48	38.82	37.88	41.68
5-	-5		40	19	24.13	32.47	31.53	35.33
5-	-4		36	17	21.59	29.93	28.99	32.79
5-	-3		30	14	17.78	26.12	25.18	28.98
5-	-1	0.76μ	20	9	11.43	19.77	18.83	22.63
4-	-2	↑	130	64	81.28	89.62	88.68	92.48
4-	-1		120	59	74.93	83.27	82.33	86.13
4-	-0		100	49	62.23	70.57	69.63	73.43
3-	-9		80	39	49.53	57.87	56.93	60.73
3-	-8		68	33	41.91	50.25	49.31	53.11
3-	-7		60	29	36.83	45.17	44.23	48.03
3-	-6		50	24	30.48	38.82	37.88	41.68
3-	-5		40	19	24.13	32.47	31.53	35.33
3-	-4		36	17	21.59	29.93	28.99	32.79
3-	-3		30	14	17.78	26.12	25.18	28.98
3-	-1	0.5μ	20	9	11.43	19.77	18.83	22.63
1-	-2	↑	130	64	81.28	89.62	88.68	92.48
1-	-1		120	59	74.93	83.27	82.33	86.13
1-	-0		100	49	62.23	70.57	69.63	73.43
	-9		80	39	49.53	57.87	56.93	60.73
	-8		68	33	41.91	50.25	49.31	53.11
	-7		60	29	36.83	45.17	44.23	48.03
	-6		50	24	30.48	38.82	37.88	41.68
	-5		40	19	24.13	32.47	31.53	35.33
	-4		36	17	21.59	29.93	28.99	32.79
	-3		30	14	17.78	26.12	25.18	28.98
175472-1		0.2μ	20	9	11.43	19.77	18.83	22.63
PART NO.		Au PLATE	POS.	n	A	B	C	D

LTR	REVISION RECORD	DR	CHK	DATE
C	REVISED ECN J-1583	T.N	Yf	4-OCT-99
B	REVISED ECN J-12001	T.N	Y.F	18-JAN-99
A	REVISED ECN J-12103	H.K	Y.F	29-JAN-99
0	REVISED ECN J-10612	S.I	Y.F	6-JUN-98

AMP | AMP(JAPAN),LTD. Tokyo,Japan

NAME: AMP CHAMP.050 CONECTOR (B-T-B)
PLUG CONNECTOR (HORIZONTAL WITH RETENTION LEG)

WIRE RANGE | INSULATION DIA | MATERIAL 2 | FINISH 3

DR. S.Ishikawa 6-JUN.-'98 | DE. | CHK. Y.FUJIURA 29/SEP/'98 | APP. R.NISHIMURA 3/OCT/'98

GENERAL TOLERANCE: 0<n≤10 : ±0.2; 10<n≤30 : ±0.25; 30<n≤100 : ±0.3; ANGLES : ±3°

SIZE C J | NUMBER C-175472 | SCALE — | REV. C | SHEET 1 OF 1

CUSTOMER DRAWING

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DISP

AMP-1 REV.10/'98