2205076-2 - ACTIVE

Micro-MaTch | Micro-MaTch Industrial

TE Internal #: 2205076-2 MICRO-MATCH MOW Cable Assembly, 20 Positions, .492 ft [.15 m], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm², Ribbon Cable, MICRO-MATCH MOW Plug

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > Pluggable I/O Cable Assemblies > MICRO-MATCH STD MOW TO MOW CABLE ASSY



Cable Assembly Type: MICRO-MATCH MOW

Keyed Position: 1

Equalized: Yes

Wire Size: 159.8 – 159.88 mm²

All MICRO-MATCH STD MOW TO MOW CABLE ASSY (27)

Features

Product Type Features

Cable Assembly Category

Cable Assembly Type

Industry Standard

MICRO-MATCH MOW

Connector Type (End A)	MICRO-MATCH MOW Plug
Connector Type (End B)	MICRO-MATCH MOW Plug
Cable Style	Ribbon Cable
Configuration Features	
Keyed Position	1
Number of Positions	20
Number of Signal Positions	20
Body Features	
Equalized	Yes
Cable Color	Gray
Cable Flammability Rating	UL 2651
Mechanical Attachment	
Mating Alignment	With
Dimensions	

C For support call+1 800 522 6752

2205076-2

MICRO-MATCH MOW Cable Assembly, 20 Positions, .492 ft [.15 m], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm², Ribbon Cable, MICRO-MATCH MOW Plug



Wire Size	159.8 – 159.88 mm²
Operation/Application	
Shielded	No
Halogen Free	No
Other	
Cable Assembly Configuration	Double Ended
Cable Assembly Length	.15 m[.492 ft]
-	
-	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant

Halogen Content

Solder Process Capability

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

2205076-2


MICRO-MATCH MOW Cable Assembly, 20 Positions, .492 ft [.15 m], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm², Ribbon Cable, MICRO-MATCH MOW Plug





TE Part # CAT-M5833-F3492A Female-on-Board Connector, Top Entry

Also in the Series | Micro-MaTch Industrial

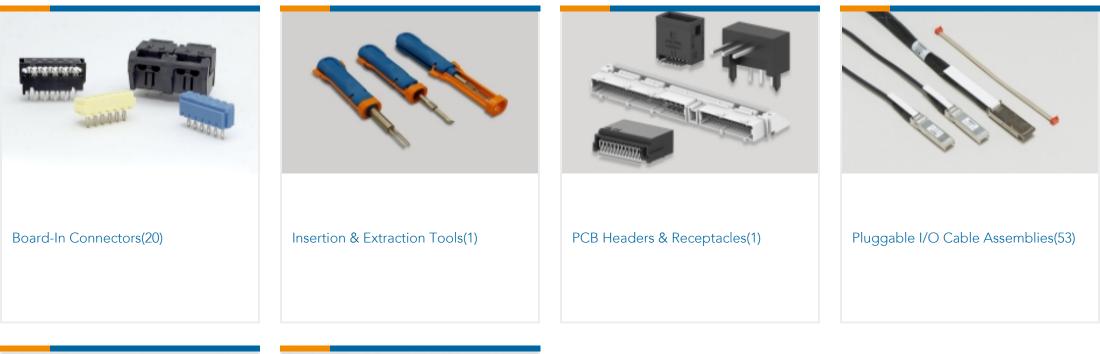





Customers Also Bought



2205076-2

MICRO-MATCH MOW Cable Assembly, 20 Positions, .492 ft [.15 m], Gray Cable, Equalized, 28 AWG, 159.8 – 159.88 mm², Ribbon Cable, MICRO-MATCH MOW Plug



Documents

Product Drawings CA MICRO-MATCH MOW-MOW 20POS

English

Product Specifications

Application Specification

English

micro match miniature connector system

English