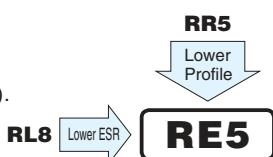


RE5Ultra-low ESR, Low Profile ($\phi 8$)


- Ultra Low ESR, High ripple current.
- Low Profile(Height 8mm).
- Load life of 2000 hours at 105°C.
- Radial lead type : Lead free flow soldering condition correspondence.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

**■ Specifications**

| Item | Performance Characteristics | |
|-------------------------------|--|---|
| Category Temperature Range | -55 to +105°C | |
| Rated Voltage Range | 2.5 to 4.0V | |
| Rated Capacitance Range | 560 to 820μF | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | |
| Tangent of loss angle (tan δ) | Less than or equal to the specified value at 120Hz, 20°C | |
| ESR (※1) | Less than or equal to the specified value at 100kHz, 20°C | |
| Leakage Current (※2) | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C | |
| Endurance | Test condition | 105°C, rated voltage 2000Hrs. |
| | Capacitance change | Within ±20% of initial value before test |
| | tan δ | 150% or less than the initial specified value |
| | ESR(※1) | 150% or less than the initial specified value |
| | Leakage current (※2) | Less than or equal to the initial specified value |



※1 ESR should be measured at both of the terminal ends closest to the capacitor body.

※2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

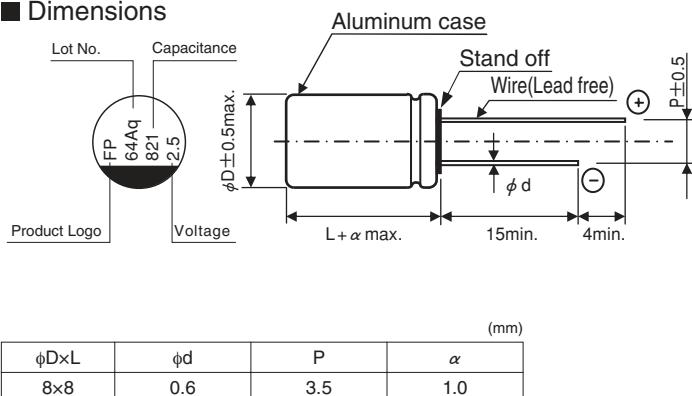■ Dimensions**● Frequency coefficient of rated ripple current**

| Frequency | 120 Hz | 1 kHz | 10 kHz | 100 kHz | 300 kHz |
|-------------|--------|-------|--------|---------|---------|
| Coefficient | 0.10 | 0.45 | 0.50 | 1.00 | 1.00 |

Type numbering system (Example : 2.5V 820μF)
Nichicon part number

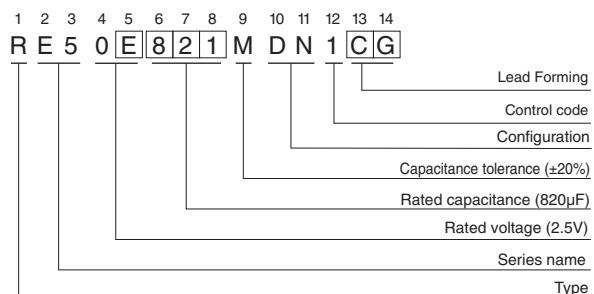
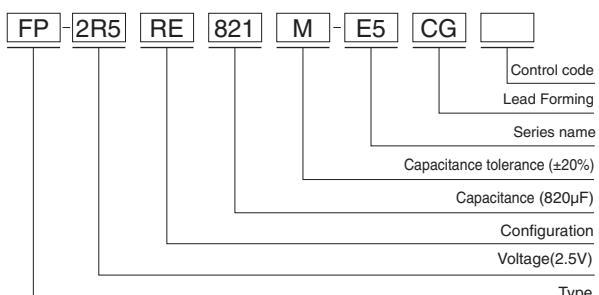
**FPCAP part number**

RE5

■ Dimensions

| Rated Voltage (V) (code) | Surge Voltage (V) | Rated Capacitance (μF) | Case Size $\phi\text{D} \times \text{L}$ (mm) | $\tan \delta$ | Leakage Current (μA) (at 20°C after 2 minutes) | ESR (mΩ) (20°C/100kHz) | Rated Ripple Current (mA rms) (105°C/100kHz) | NICHICON | FPCAP |
|-----------------------------|-------------------|-------------------------------------|---|---------------|--|---------------------------|---|----------------|-------------------|
| 2.5 (0E) | 2.8 | 560 | 8x8 | 0.10 | 500 | 5 | 6300 | RE50E561MDN1□□ | FP-2R5RE561M-E5□□ |
| | | 820 | 8x8 | 0.10 | 512 | 5 | 6300 | RE50E821MDN1□□ | FP-2R5RE821M-E5□□ |
| 4.0 (0G) | 4.6 | 560 | 8x8 | 0.10 | 560 | 5 | 6300 | RE50G561MDN1□□ | FP-4R0RE561M-E5□□ |

■ Frequency Characteristics (The frequency characteristics are typical and not a guaranteed value.)

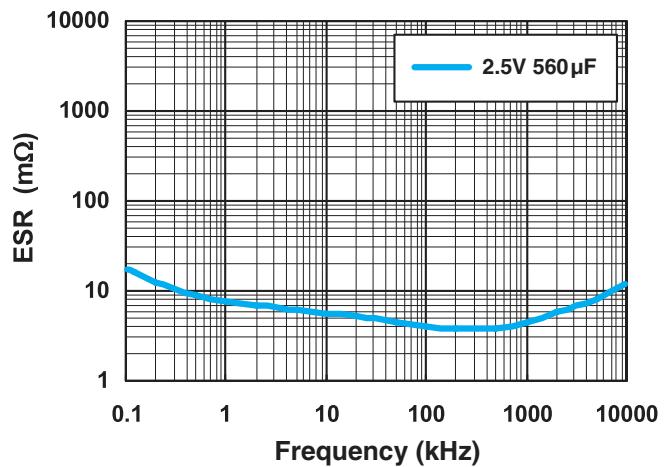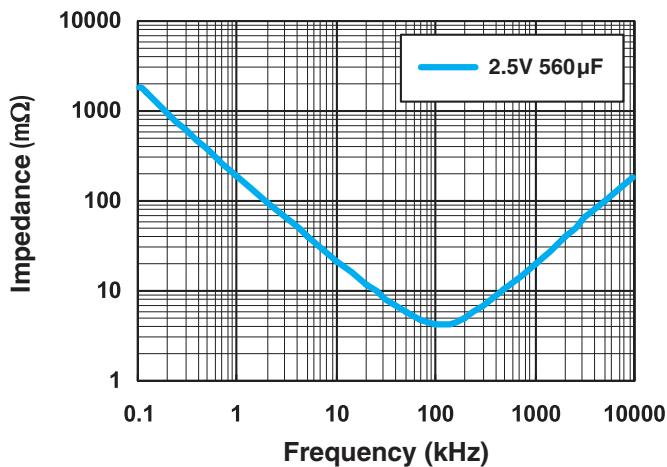

- For formed lead or taped product specifications and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.