
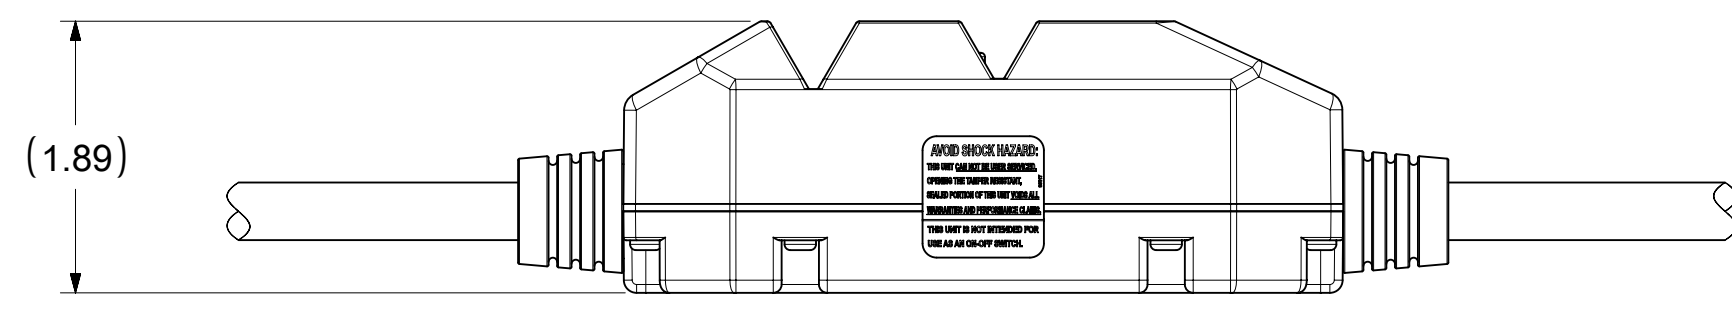


MOLDED
NEMA
5-15P

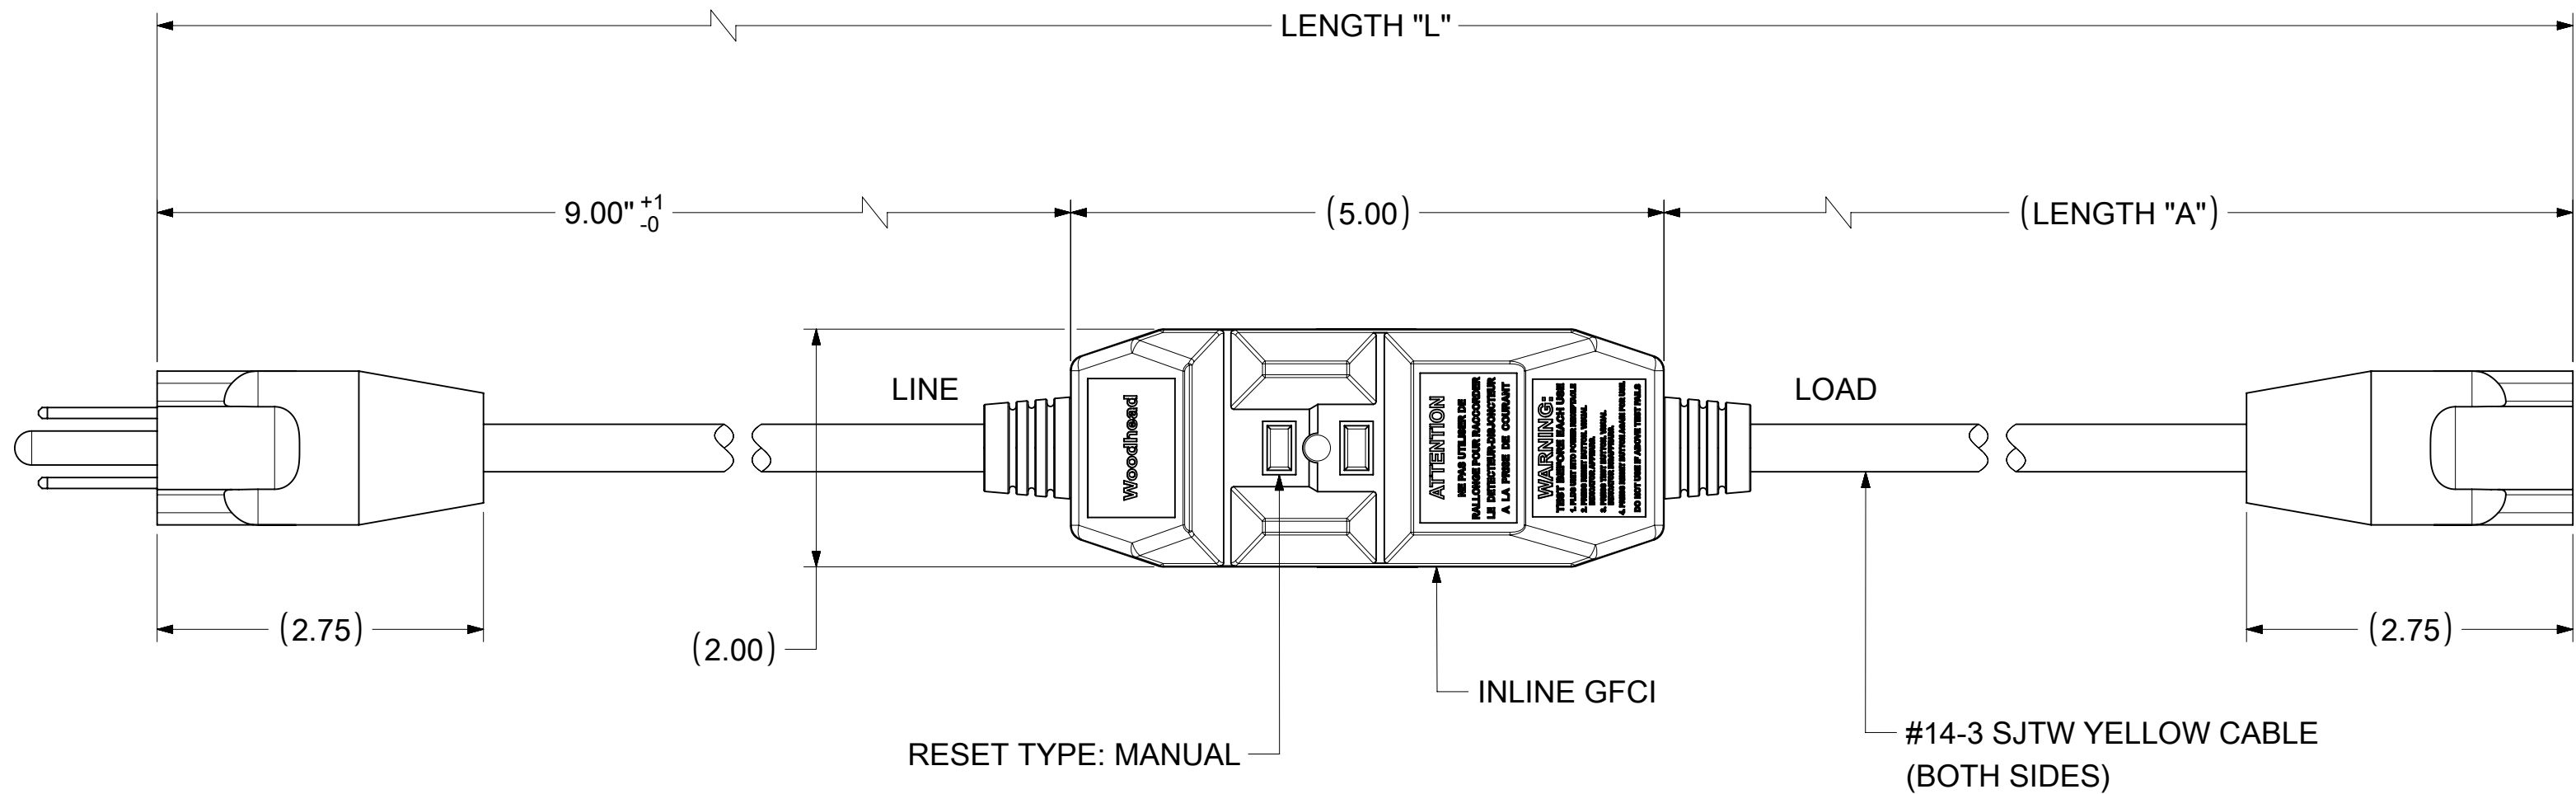

TECHNICAL

AGENCY APPROVAL: cULus
 RATED SUPPLY VOLTAGE: 120VAC
 RATED CURRENT: UP TO 15 AMPS
 RESET TYPE: MANUAL
 OPERATING FREQUENCY: 60 Hz
 TYPE: CLASS A
 GROUND TRIP CURRENT: 4-6 mA
 OVERLOAD CURRENT: 90 AMP
 INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
 ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH "A"	LENGTH "L"
1301530019	15050-1	1 FT.	2 FT. ± 1 IN.
1301530036	15050-6	5 FT.	6 FT. ± 2 IN.
1301530022	15050-25	24 FT.	25 FT. ± 2 IN.
NA	15050-50	49 FT.	50 FT. ± 2 IN.

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{C} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		CURRENT REV DESC: UPDATED PLUG AND CONNECTOR.					
	DIMENSION UNITS: INCH SCALE: NTS	EC NO: 730358 DRWN: PPURSUTANDEL 2022/11/29 CHK'D: DNGUYEN2 2023/02/17 APPR: HKNEELAND 2023/02/21				GFCI IN-LINE 15A WITH MOLDED PLUG & CONNECTOR		
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °			PRODUCT CUSTOMER DRAWING				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			INITIAL REVISION: DRWN: PPURSUTANDEL 2022/01/04 APPR: HKNEELAND 2022/01/20		DOCUMENT NUMBER: 1301530019	DOC TYPE: PSD	DOC PART: 000