


REV. 2 10/15/96

| | |
|-----------------|---------------------------|
| COIL: @ +25 °C | |
| RESISTANCE | 160 OHMS ± 10% |
| NOMINAL VOLTAGE | 12.0 VDC |
| MUST OPERATE | 6.4 VDC |
| MUST RELEASE | 4.0 VDC MAX. 0.7 VDC MIN. |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 3000 CPS @ 30 g's |
| SHOCK | 100 g's 6 ± 1 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 25 MS MAX.

CUSTOMER DATA SHEET

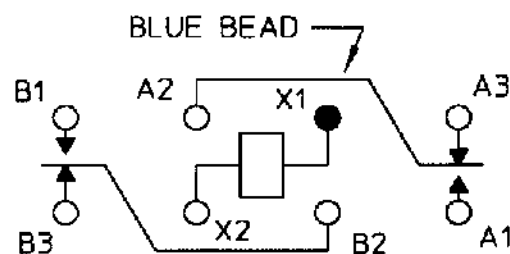

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/9/92 CKY 10/15/96



CUST. OPL
CUST. NO. M39016/6-116M

TYPE "HFW" RELAY

HFW1201G01M