
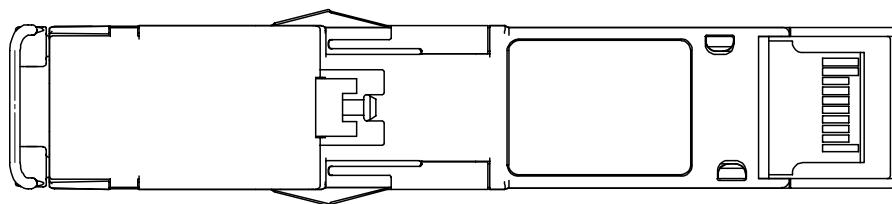
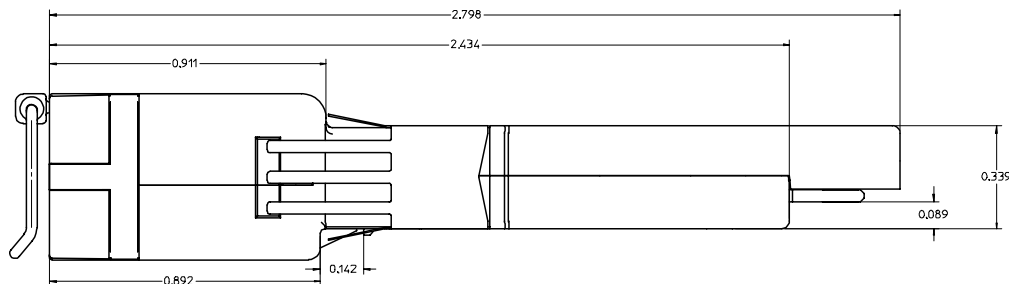

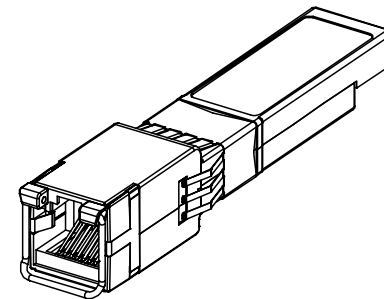


20 19 18 17 16 15 14 13 12 11 74741 9 8 7 6 5 4 3 2 1

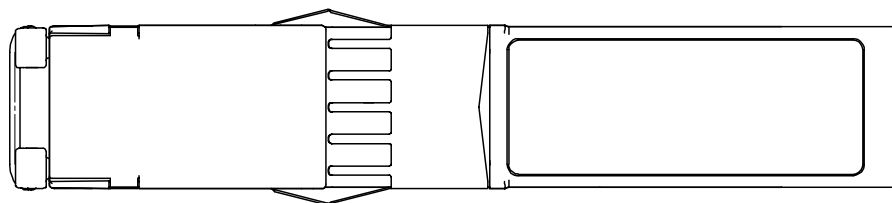

FEATURES:

1. MEETS IEEE 802.3z, u, ab.
2. MEETS 1000BASE-T STANDARDS.
3. MATES WITH STANDARD SFP MSA SPECIFICATION COMPONENTS.
4. MATES WITH COMMON 1X4 AND OTHER GANGED SFP CAGES.
5. HOT PLUGGABLE.
6. REQUIRES <1 WATT OF POWER.
7. SERIAL ID.
8. SOFTWARE CONFIGURABLE.
9. 100 METER CAT-5 AT 10^{10} BER.
10. CENTERED RJ-45 MOD JACK, CONFORMS TO 1U RACK.
11. .567 INCH SPACE REQUIRED BETWEEN ADJACENT CAGE ON TOP OR BOTTOM.
12. ROBUST ZINC ALLOY DIE CAST BODY, NICKEL PLATED.
13. EMI GROUNDING GIRDLE PROVIDES 13 CONTACT POINTS AROUND CAGE OPENING.
14. BAIL DE-LATCH SYSTEM, USES LIFT AND PULL ACTION TO REMOVE.
15. LEAD FREE, RoHS COMPLIANT.

PART NUMBER	DESCRIPTION
747410021	1000BASE-T SFP RJ-45 CENTERED, LOS GND
747410022	1000BASE-T SFP RJ-45 CENTERED, LOS TOGGLE

EC NO: 2006/07/28 DRWN:CCOX CHKD: 2006/08/07 APPR:BRUSSELL 2006/08/15 REV: A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	0.0 0.0	4 PLACES ± .005 ± .005	mm INCH	DIMENSION STYLE INCH ONLY		TITLE
		3 PLACES ± .005 ± .005		DRAWN BY KLLLOYD	DATE 2003/07/29	1000 BASE-T SFP ADAPTER SALES DRAWING
		2 PLACES ± .005 ± .005		CHECKED BY BRUSSELL	DATE 2003/07/29	MOLEX INCORPORATED
	1 PLACE ± .005 ± .005	ANGULAR ± 2 °	APPROVED BY BRUSSELL	DATE 2003/07/29	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-74741-021
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SHEET NO. 1 OF 1	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1