



**BNC FEMALE - C MALE STRAIGHT ADAPTER**

**R191.429.000**

Série : ADAPT

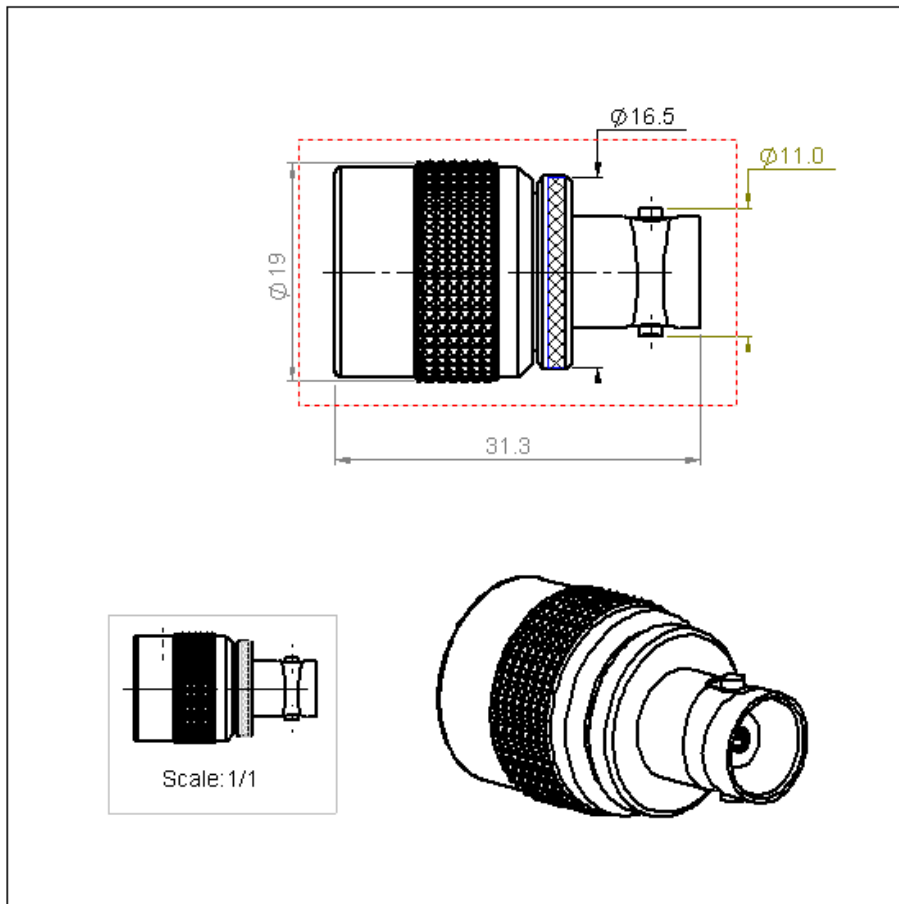

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	LAITON	NICKEL 2
CENTER CONTACT	CUPRO BERYLLIUM	ARGENT 5 SUR CUIVRE 0.5
OUTER CONTACT	CUPRO BERYLLIUM	NICKEL 2
INSULATOR	PTFE	
GASKET	ELASTOMERE SILICONE	
OTHERS PARTS	LAITON	NICKEL 2
-	-	-
-	-	-

Issue : 0512 S

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



**BNC FEMALE - C MALE STRAIGHT ADAPTER**

**R191.429.000**

Série : ADAPT

**PACKAGING**

Standard	Unit	Other
<b>1</b>	-	<b>Contact us</b>

**SPECIFICATION**

**ELECTRICAL CHARACTERISTICS**

Impedance	<b>50</b>	$\Omega$
Frequency	<b>0-4</b>	GHz
VSWR	<b>1.2 + 0,0200</b>	x F(GHz) Maxi
Insertion loss	-	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	- F(GHz)) dB Maxi
Voltage rating	-	Veff Maxi
Dielectric withstanding voltage	<b>1500</b>	Veff mini
Insulation resistance	<b>5000</b>	M $\Omega$ mini

**ENVIRONMENTAL**

Operating	<b>-55/+125</b>	$^{\circ}$ C
Hermetic seal	<b>NA</b>	Atm.cm3/s
Panel leakage	<b>NA</b>	

**MECHANICAL CHARACTERISTICS**

Center contact retention		
Axial force – Mating end	<b>27</b>	N mini
Axial force – Opposite end	<b>27</b>	N mini
Torque	<b>NA</b>	N.cm mini
Recommended torque		
Mating	<b>BNC</b>	<b>0</b> N.cm
	<b>C</b>	<b>0</b> N.cm
	<b>-</b>	<b>0</b> N.cm
Panel nut	<b>NA</b>	N.cm
Mating life	<b>500</b>	Cycles mini
Weight	<b>25,1030</b>	g

**OTHERS CHARACTERISTICS**

Issue : 0512 S

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



**RADIALL**®