

W-EYK, Insert Pt Temperature Sensor Stainless-Steel Housing acc. to DIN EN 60751

Temperature range -40 °C to +500 °C

- Platinum sensor encapsulated in protective stainless steel housing
- Hi-temperature fiberglass insulated connection wires
- High maximum operating temperature +500 °C
- Housing resistant to oils, organic and inorganic bases and alkalis (medium concentration)

The dimensionally stable stainless steel protective tube allows easy mounting in corresponding mating holes. Applications include temperature measurement in gas, including HVAC equipment at elevated temperatures. Measurement accuracy is optimized for temperatures between 0 °C and 100 °C.

Nominal Resistance (Element) R_0 [Ω]	Tolerance Class (Element)	Order Number	Packaging
Pt 100	F 0.10 (1/3 B)	30500109	Plastic bag
Pt 1000	F 0.10 (1/3 B)	31500989	Plastic bag

Temperature Range of Tolerance Class

Tolerance Class F 0.10 (1/3 B) 0 °C to +100 °C

Temperature Coefficient

TCR = 3850 ppm/K

Response Time

Water ($v = 0.4$ m/s)

$$t_{0.5} = 3.2 \text{ s}$$

$$t_{0.9} = 9.6 \text{ s}$$

Measuring Current

Pt100 Ω: 0.3 bis 1 mA

Pt1000 Ω: 0.1 bis 0.3 mA

(self-heating has to be considered)

Long-Term Stability (Sensor Element)

The drift of the resistance value at 0 °C after a storage for 1000 hours in air at the declared upper temperature limit is not more than the tolerance value of the declared tolerance class according to DIN EN 60751.

Typical drift of $R(0 \text{ °C})$ is 0.04 % after 1000 hours at +500 °C.

Self-Heating (Sensor Element)

0.4 K/mW bei 0 °C

Connection Technology

Welding, Crimping, Brazing, Soft Soldering, Clamping



Image for illustration purposes only

W-EYK, Insert Pt Temperature Sensor Stainless-Steel Housing acc. to DIN EN 60751

Temperature range -40 °C to +500 °C

Housing

Closed end tube
Stainless-Steel 1.4571 (316 Ti)

Connection Cable

Fiberglass insulated twisted wire pair Ni
2 x 0.5 mm (AWG24), total length 2 x 320 mm

Conductor Resistance

0.269 Ω (0.42 Ω /m)

Applications

- HVAC
- Data Logging
- Laboratory instrumentation
- Oven temperature
- Hi-temp temperature sensing

Properties

- Corrosion resistant stainless steel protective housing
- High- temperature fiberglass-insulated connection wires
- Widely used for a variety of temperature sensing applications
- Available in Pt100 or Pt1000 resistance values
- +500 °C maximum operating temperature

Customer-Specific Adaptions can be implemented in High Volume for the following Properties:

- Extension Length
- Sensor Element: Type and Resistance
- Connectors

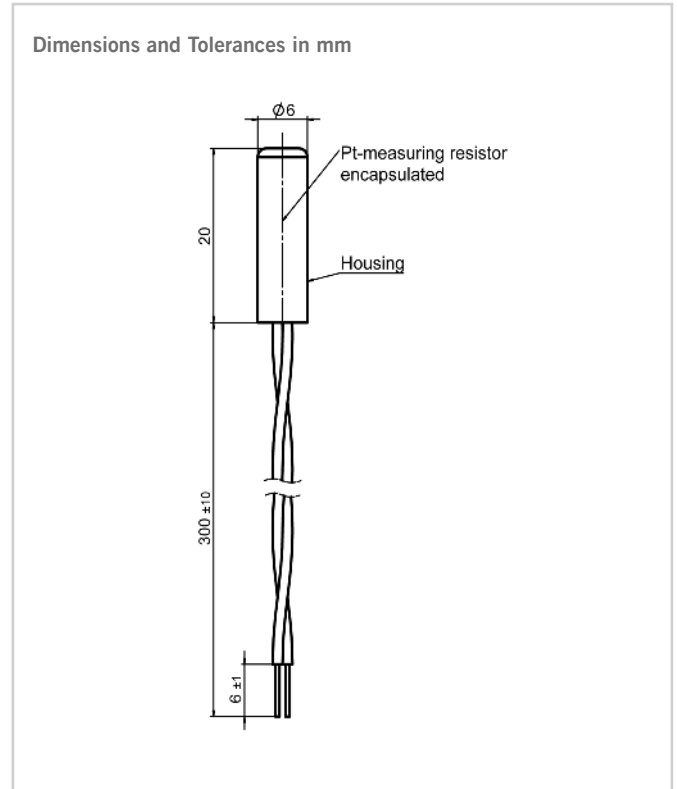


Image for illustration purposes only

Resistance vs.
Temperature Table



RoHS
compliant

The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect YAGEO Nexensos cannot assume any liability. The sale of any products by YAGEO Nexensos is exclusively subject to the General Terms of Sale and Delivery of YAGEO Nexensos in their current version at the time of purchase, which is available under www.yageo-nexensos.com/tc or may be furnished upon request. This data sheet is subject to changes without prior notice.

YAGEO Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

YAGEO Nexensos GmbH, Germany
Web: www.yageo-nexensos.com
Contact: nexensos.america@yageo.com

Document: 20003959423 Part 001 Version 02 | Status: 03/2023

Page 2 of 2