


т	۵	п –	т	0

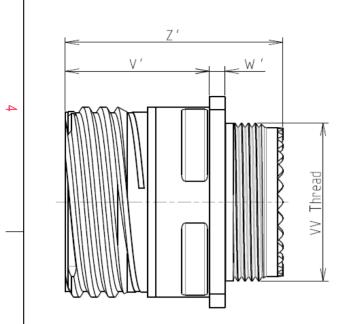

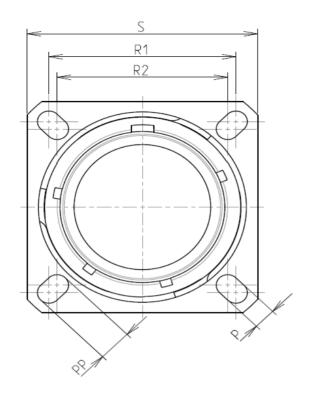



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 09

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	: -65°C to +200°C
	-Salt Spray	: 2000 hours
	-Mass	: 7.8 g ± 10%

8D 0

G

09

-

Μ

98

F

ΡE

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M12x1-6g

т		0		Φ		Þ	-
							4
		LAY	OUT SHOWN AS EXA	MPLE			3
Nominal 3.25±0.2 5.49±0.2 18.26 15.09 23.8±0.3 19.5+1.4/-0		due to a use the Specifications	not be liable for any r of the Products whic issued by either of the onal recommendatio	h does not cor he Parties or b	mply with by a third party		
2.1/3.65	L		Country	Jurisd	iction & Control L	ist	
32 MaxADM12x1-6g		FR Not Listed 2 PN: 8D009M98PE 2					2
	A 03-10-2016	First Release					-
	ISS DATE	Latest modificatio	n - by		01070-57-5	MOD N°	
Designed By: Date: CUSTOMER DRAWING TITLE Composite Receptacle 8D series			AWING	_			
	SCALE .		General linear Tolerances: ±		NPRDS / PRC 859	DJECT	-
ORIENTATION : E CONTACT TYPE : PIN(500 Matings)		J WWW.SOURIAU.COM it must not be reproduced or communicated without permission		OURIAU be reproduced or			
CONTACT LAYOUT : 09-98	FORMAT	1	SOURIAU [SHEET	-
	A3		8D009M9			1/2	
E	D	С		В		A	

r	I	۵	г	m		0
		Contact Layout				Panel Cutou
4	-X_				ĥ	SOUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numbridge 3 -98 3	n X-axis Y-axis (mm) (mm) +065 (1.55) +0.38 (0.97) +.000 (0.00)075 (1.91) -065 (1.65) +.038 (0.97) -065 (1.65) +.038 (0.97)				ØT.
ω						Dim ØA ØAA R1 ØT
	\vdash					SOURIAU shall not be liable for an
						due to a use of the Products wh the Specifications issued by either o (professional recommendat
N						PN: 8D009N
						16 First Release
					ISS DATE Designed By:	Date:
					SCALE	Composite General linear
<u> </u>					NA	Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D009M
L	Н	G	F	E	D	С

