


Fig 292

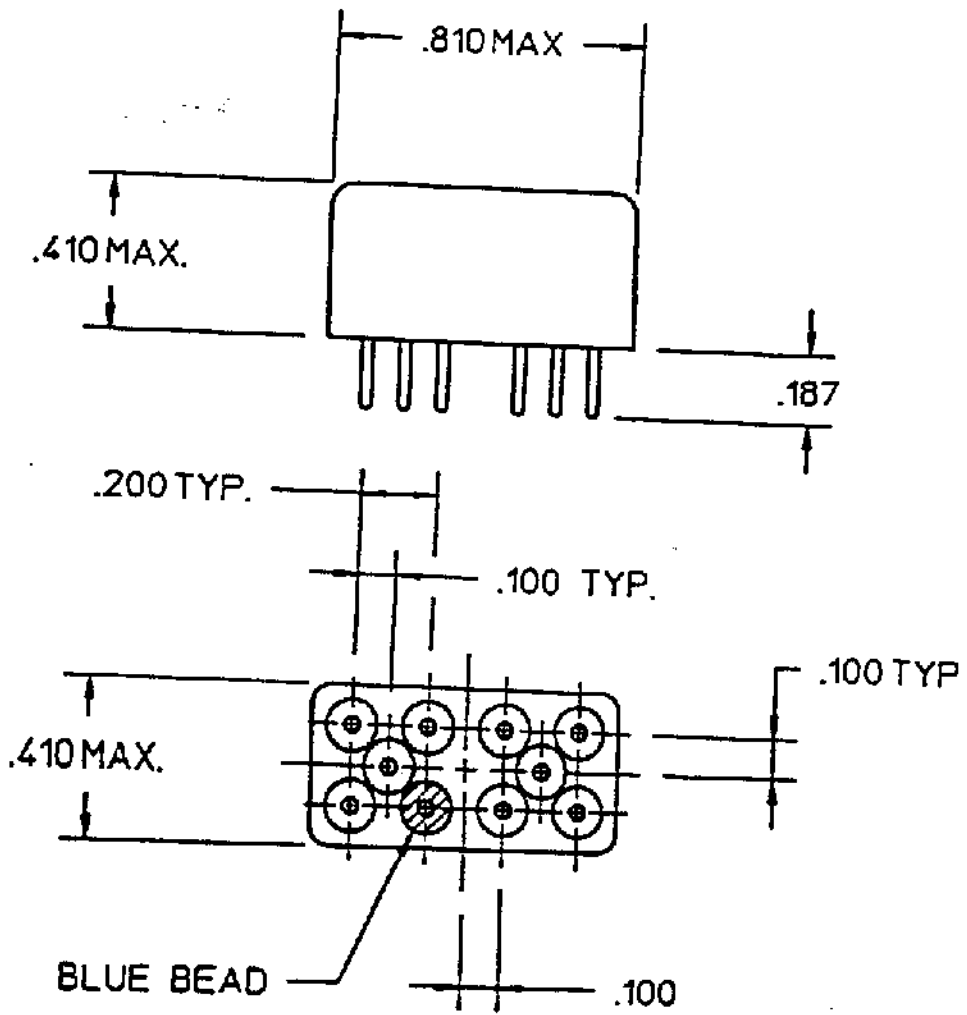

COIL: 24 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25°C	1000 OHMS ± 10% @ 25°C
13.5 VDC MUST OPERATE	13.5 VDC MUST OPERATE

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 30 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C


NOTES: OTHER SPECIFICATIONS IN
ACCORDANCE WITH MIL-R-39016/45
REF. HL11D-24

CUST. P+B
 CUST. NO. HL-11D-24

TYPE 'LS' RELAY

CUSTOMER DATA SHEET

LAST ENERG.

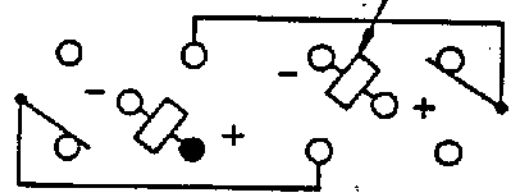

CONTACT RATING: 2 AMPS RESISTIVE
 30 VDC 100,000 OPERATIONS

DR. R.B. 11-18-92 CK. JAW 11-18-92



LS-9/35
 LATCHING RELAY