



UNIT : MM

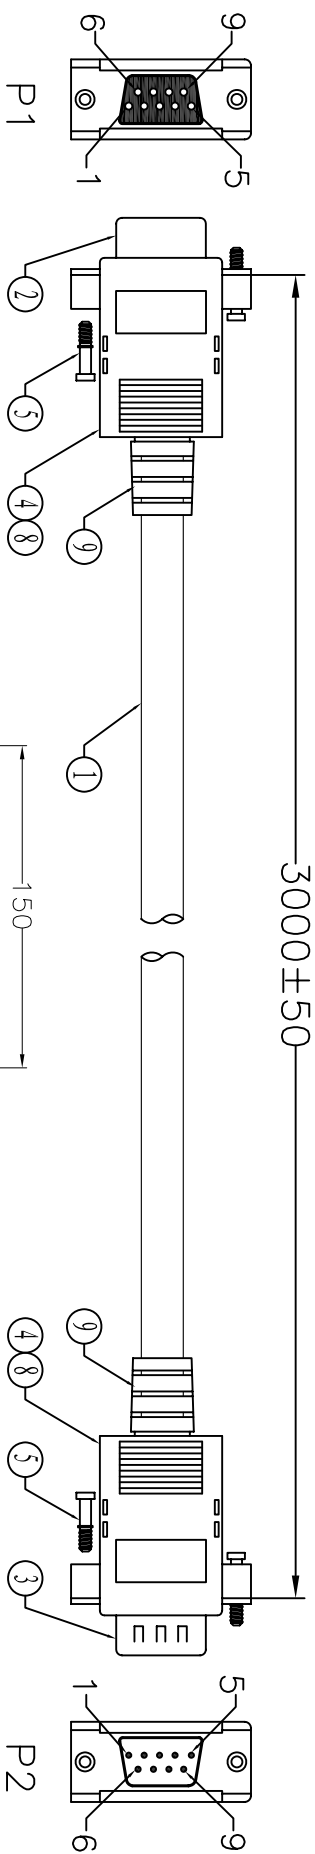

PIN ASSIGNMENT	
P1	P2
1 BLACK	4
2 BROWN	3
3 RED	2
4 ORANGE	1
5 YELLOW	5
7 GREEN	8
8 BLUE	7
9 PURPLE	9
SHELL DRAIN	SHELL

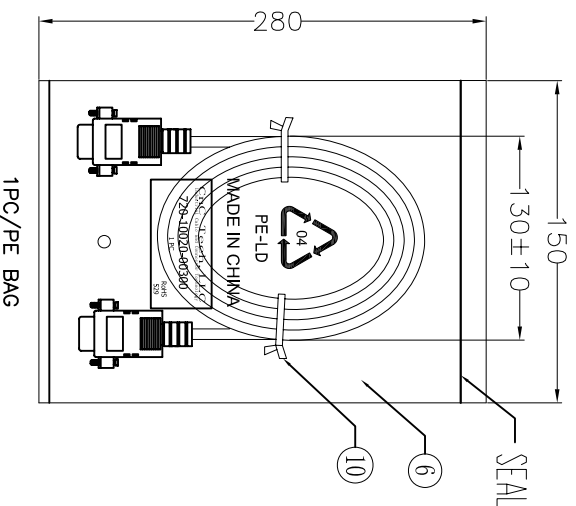

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

⑩	TIE	2	WHITE TIE L=120MM
⑨	S/R	5.5g	BEIGE(IV-29#) 45P PVC (MOULD NO.SR-50)
⑧	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20mm
⑦	PE BAG	1/10	CLEAR SIZE:360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS".
⑥	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1Pc".
⑤	SCREW	4	SCREW #4-40UNC L=12.5mm,NICKEL PLATED
④	DKN	2set	DB9P DKN W/O NUT BEIGE
③	CONN	1	DB 9P MALE SOLDER TYPE G/F ,BLUE INSULATION,SHELL-NICKEL.
②	CONN	1	DB 9P FEMALE SOLDER TYPE G/F ,BLUE INSULATION,SHELL-NICKEL.
①	CABLE	1	NOUL 28AWG*8C+D+AL OD5.0mm COLOR BEIGE(IV-29#) L=3000± 15MM
NO.	NAME	QTY	SPECIFICATION

**CNC Tech, LLC**

Industrial Cable and Connector Technology

DRAWN BY ZHONGHS DARTING NO.

CHECKED BY CUSTOMER

APPROVAL BY ITEN NO. 720-10020-00300

DECIDE BY DATE 2012-02-06

VERSIONS/EDITION A/0 PROJECT



4

3

2

1