
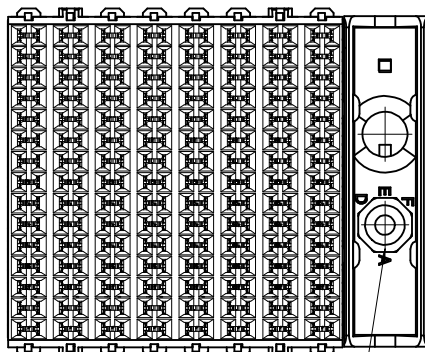
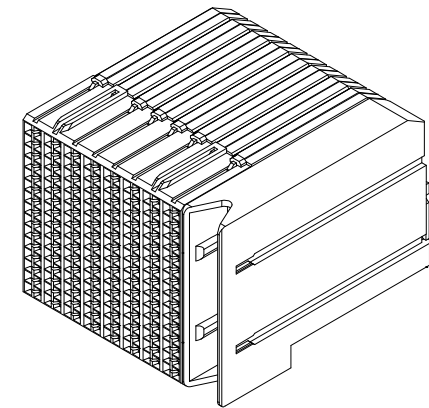
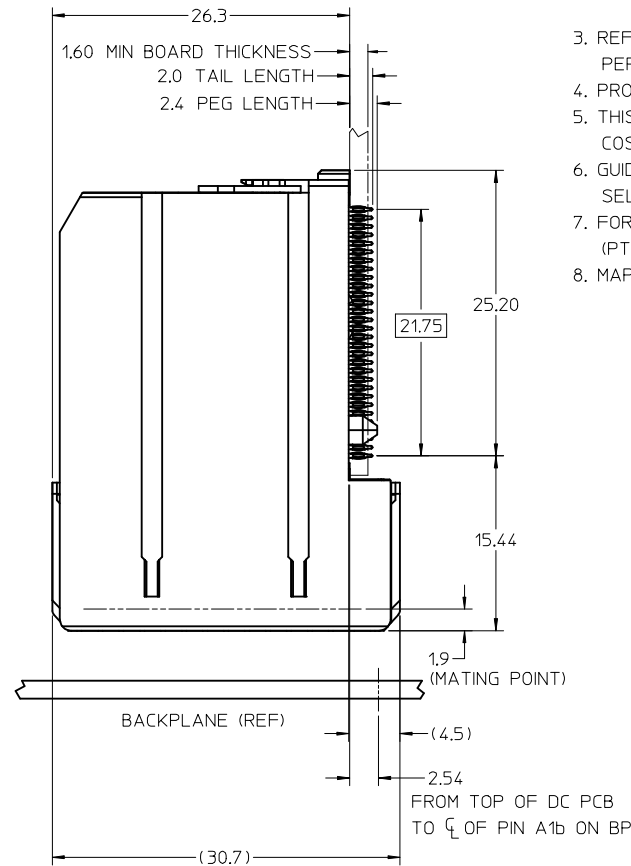


NOTES:


1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
2. FINISH: 10µIN MIN. GOLD (MAPS), OR 30µIN MIN. GOLD IN CONTACT AREA
SELECTIVE MATTE TIN ON PCB TAILS,
NICKEL OVERALL.
3. REFER TO MOLEX PRODUCT SPEC PS-75710-999 FOR PERFORMANCE SPECIFICATIONS.
4. PRODUCT IS PACKAGED PER PK-70873-608.
5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
6. GUIDED PARTS TO BE SHIPPED WITH 2-32 TYPE AB SELF-TAPPING SCREW P/N 73726-0000.
7. FOR GROUNDED GUIDE MODULES USE DIA 2.45+/-0.10 (PTH), DIA 2.58 (DRILL), AND DIA 4.50 (PAD).
8. MAPS (MOLEX ADVANCED PLATING SYSTEM).

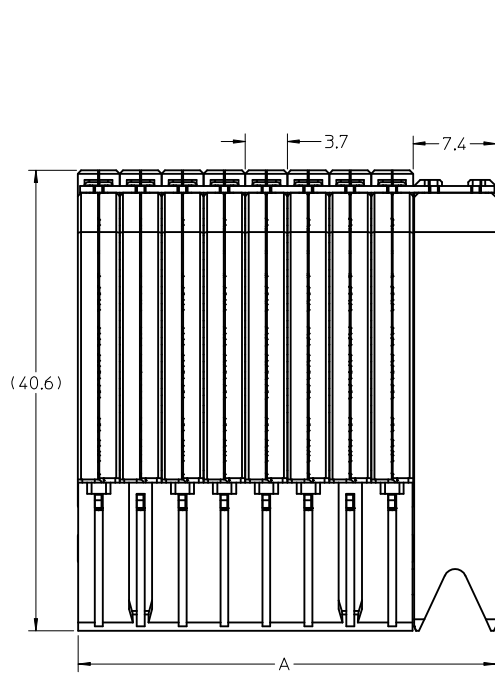

KEY SHOWN IN POSITION "NONE"

LEAD FREE CONVERSION EC NO: UCP2013-4288 DRW:RMH/PPLE 2013/04/16 CHKD:MMOLFE 2013/04/16 APPR:SMILLER 2013/08/26	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	DRAWN BY MCARRANZA	DATE 3/20/06	I-TRAC DAUGHTERCARD 15 ROW GUIDE RIGHT SIGNAL MODULE			
		3 PLACES ± --- ± ---	CHECKED BY JLAURX	DATE 3/21/06	molex			
		2 PLACES ± 0.13 ± ---	APPROVED BY JLAURX	DATE 3/21/06	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-76040-004	SHEET NO. 1 OF 2	
1 PLACE ± 0.25 ± ---	ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX. INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
0 PLACE ± ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

MATERIAL NUMBER	# OF COLUMNS	DIM. "A" MAX	DIM. "B"
76040-***8	8	37.00	25.90
76040-***9	9	40.70	29.60
76040-***0	10	44.40	33.30

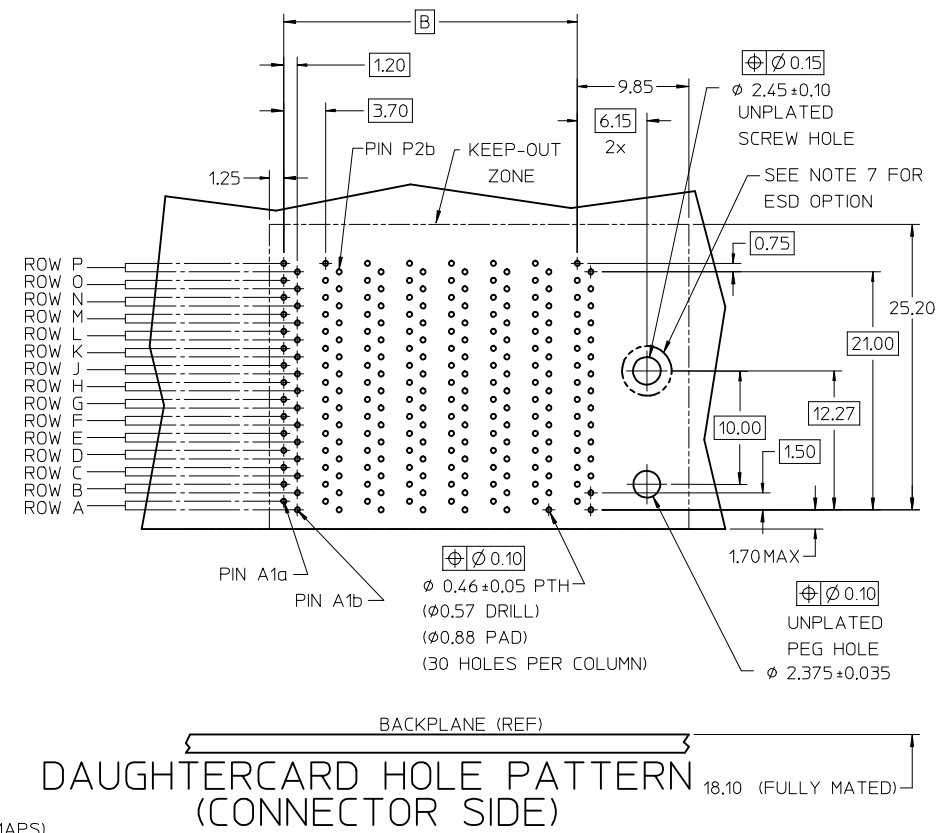

76040-***

MODULE TYPE -- TAIL PLATING TYPE _____ # OF COLUMNS
 GUIDE RIGHT -- MATTE TIN (FORMERLY TIN/LEAD) = 4
 GUIDE RIGHT -- MATTE TIN = 5

POLARIZATION KEY ORIENTATION _____

0 = NO KEY
 1 = A 5 = E
 2 = B 6 = F
 3 = C 7 = G
 4 = D 8 = H

08 = 8 COL 30 GOLD
 09 = 9 COL 30 GOLD
 10 = 10 COL 30 GOLD
 58 = 8 COL W/ESD CLIP 30 GOLD
 59 = 9 COL W/ESD CLIP 30 GOLD
 50 = 10 COL W/ESD CLIP 30 GOLD
 48 = 8 COL 10 GOLD (MAPS)
 49 = 9 COL 10 GOLD (MAPS)
 40 = 10 COL 10 GOLD (MAPS)
 78 = 8 COL W/ESD CLIP 10 GOLD (MAPS)
 79 = 9 COL W/ESD CLIP 10 GOLD (MAPS)
 70 = 10 COL W/ESD CLIP 10 GOLD (MAPS)

BACKPLANE (REF)

DAUGHTERCARD HOLE PATTERN
 (CONNECTOR SIDE)

18.10 (FULLY MATED)

SEE SHEET 1 EC NO: UCP2013-4288 DRAWN: RHIPPLE 2013/04/16 CHKD: MWOLFE 2013/04/16 APPR: SMILLER 2013/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	2:1	METRIC	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ± --- ± ---	MCARRANZA 3/20/06	I-TRAC DAUGHTERCARD 15 ROW GUIDE RIGHT SIGNAL MODULE		
		2 PLACES ± 0.13 ± ---	CHECKED BY DATE	molex DOCUMENT NO. SD-76040-004 SHEET NO. 2 OF 2		
	1 PLACE ± 0.25 ± ---	JLAURX 3/21/06				
	0 PLACE ± ±	APPROVED BY DATE				
		JLAURX 3/21/06				
		ANGULAR ±1/2°				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			