



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	1	
2	30-00177	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00085	Overmold	1	PVC, black
4	Heat shrink	Heat shrink tube	1	black, covers end of jacket
5	Heat shrink	Heat shrink tube	1	black, covers shield

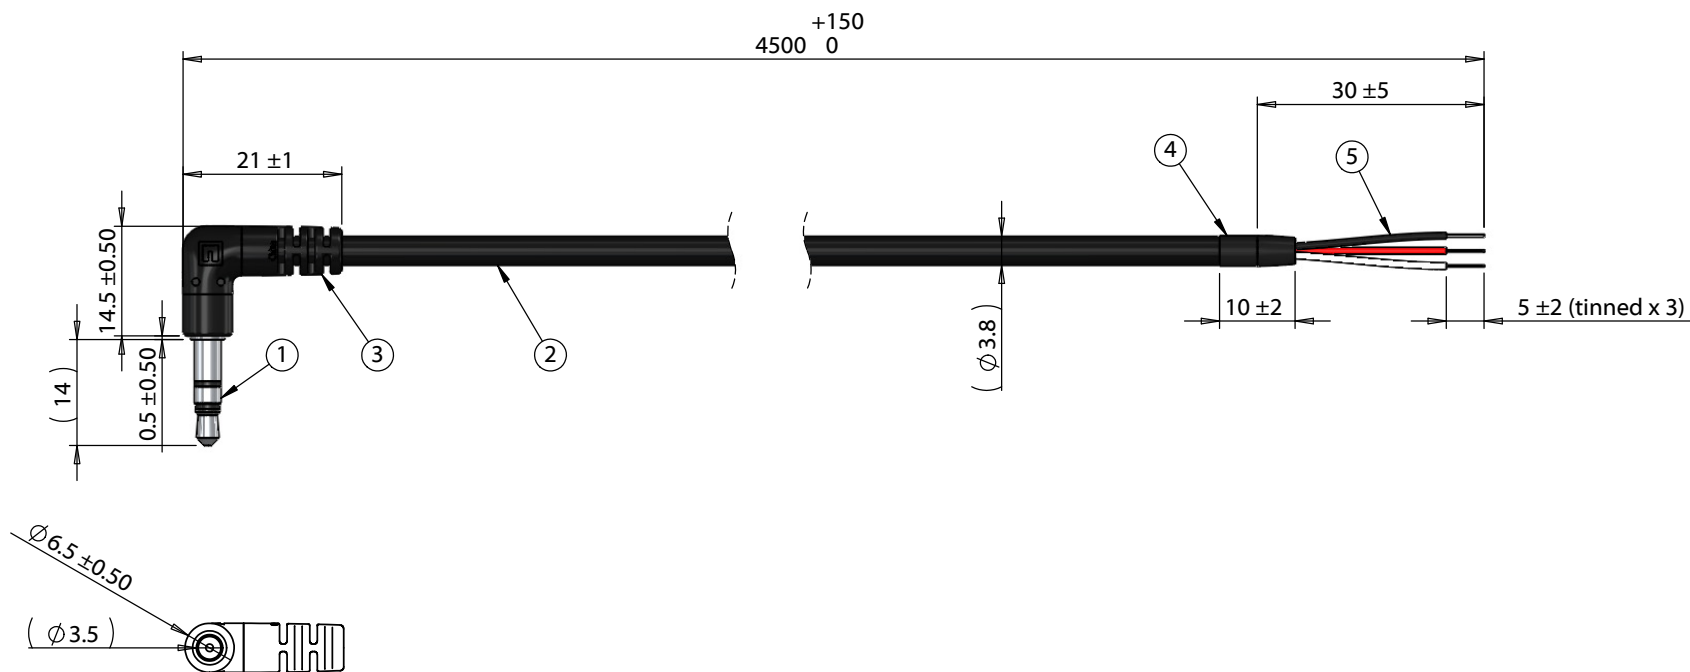

Wiring Diagram	
50-00396	wire color
A	red
B	white
C	shield

**Notes:**  
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	2/21/2019	Initial release	AG <small>Digitally signed by AG Date: 2019.02.21 14:05:24 -08'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size:
			AW <small>Digitally signed by AW Date: 2019.02.22 11:40:22 -08'00'</small>	Description:	Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 4500 mm, 3.5 mm 3C 90° 50-00396 audio plug to 5 mm tinned, 28 AWG, 30-00177 wire	A 10-03200
					Scale: 1:1
					Sheet 1 of 1

5

4

3

2

1