
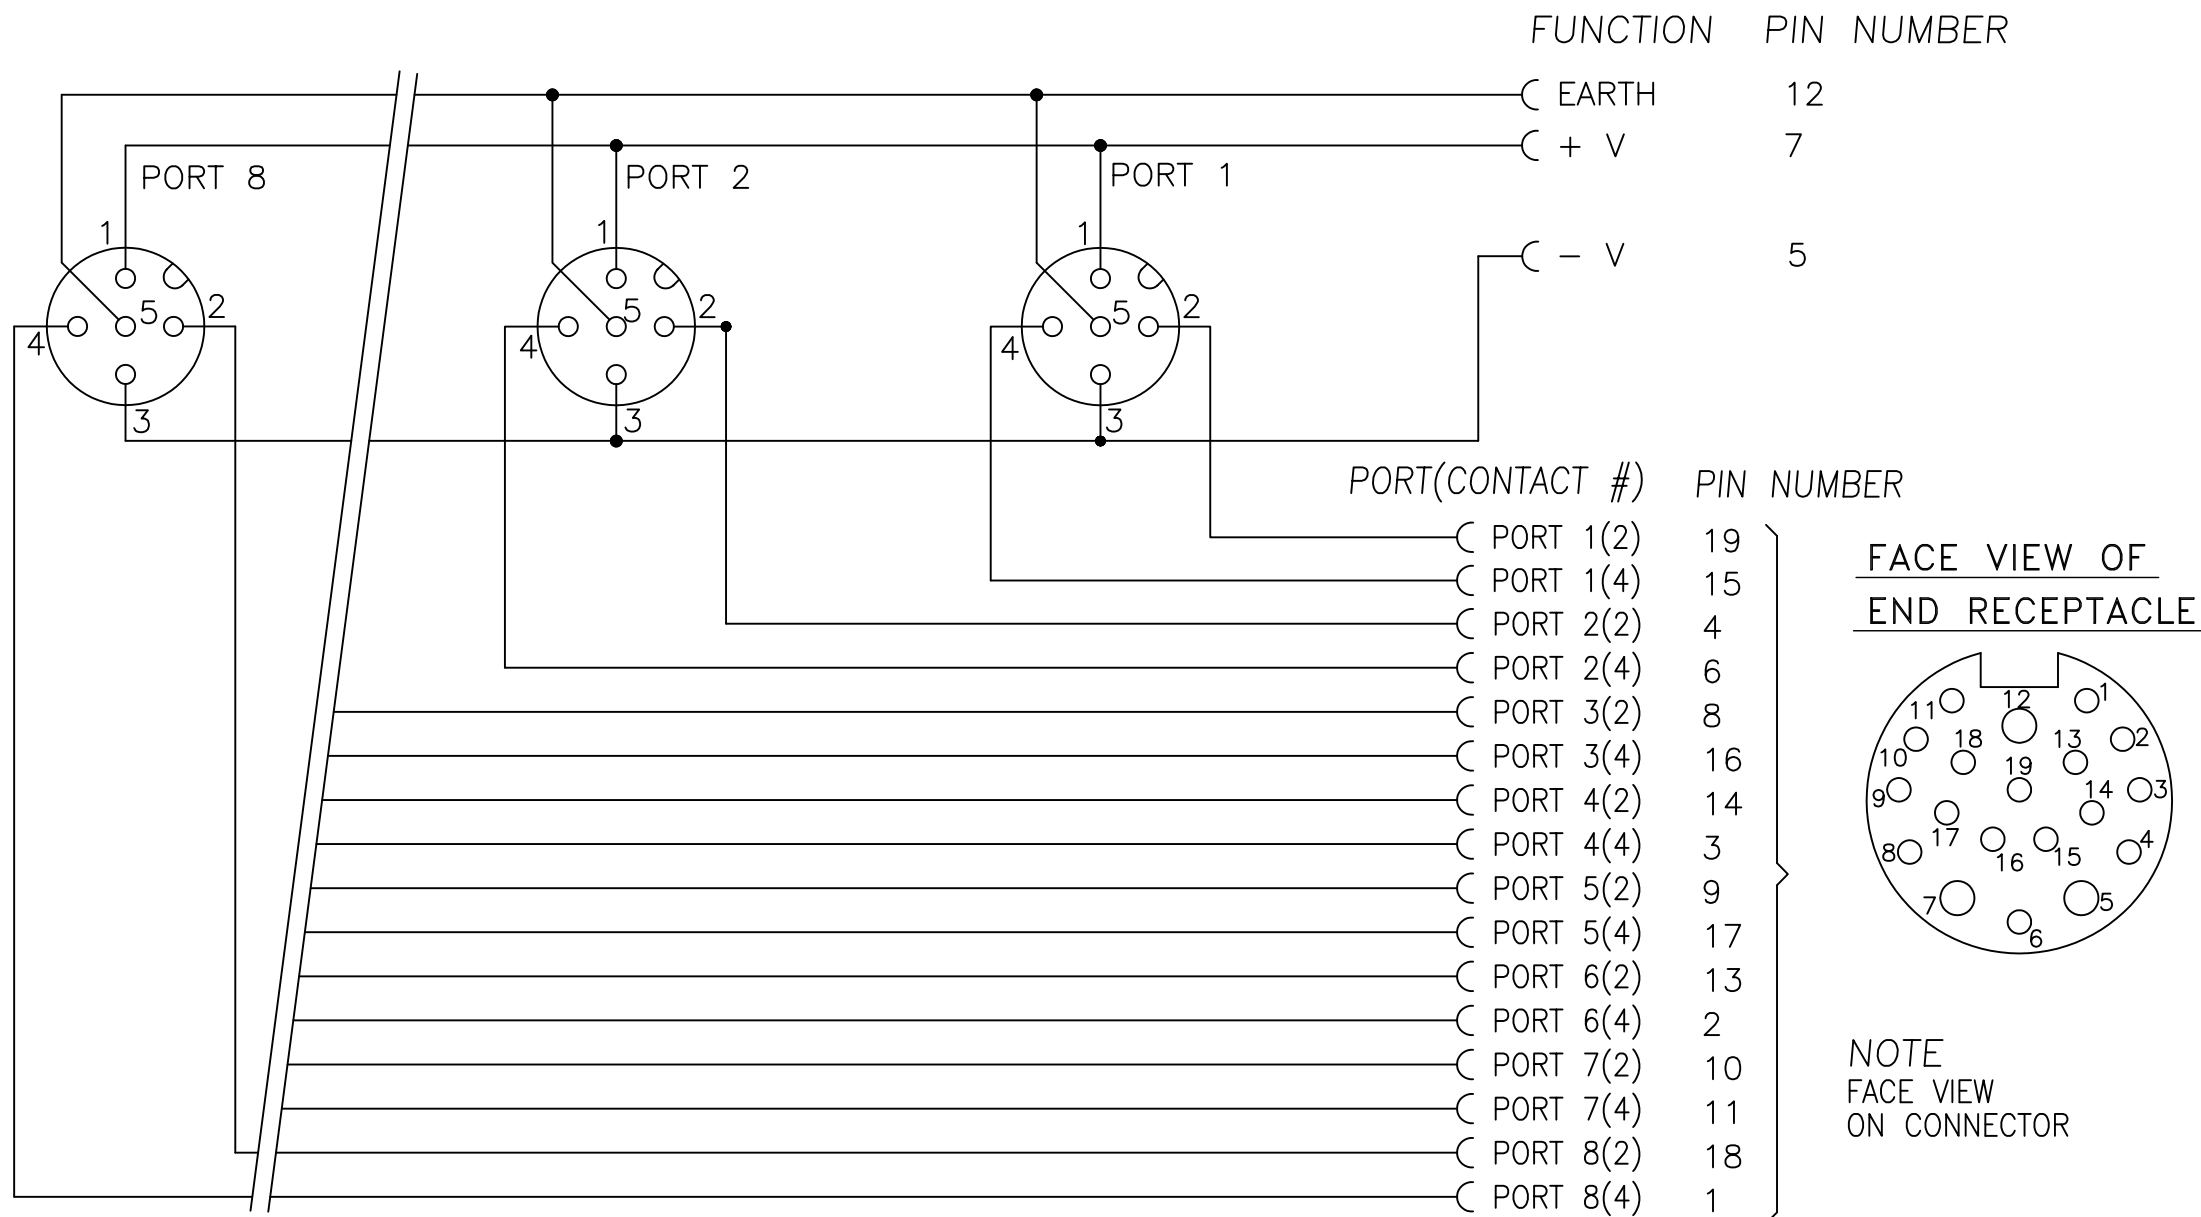
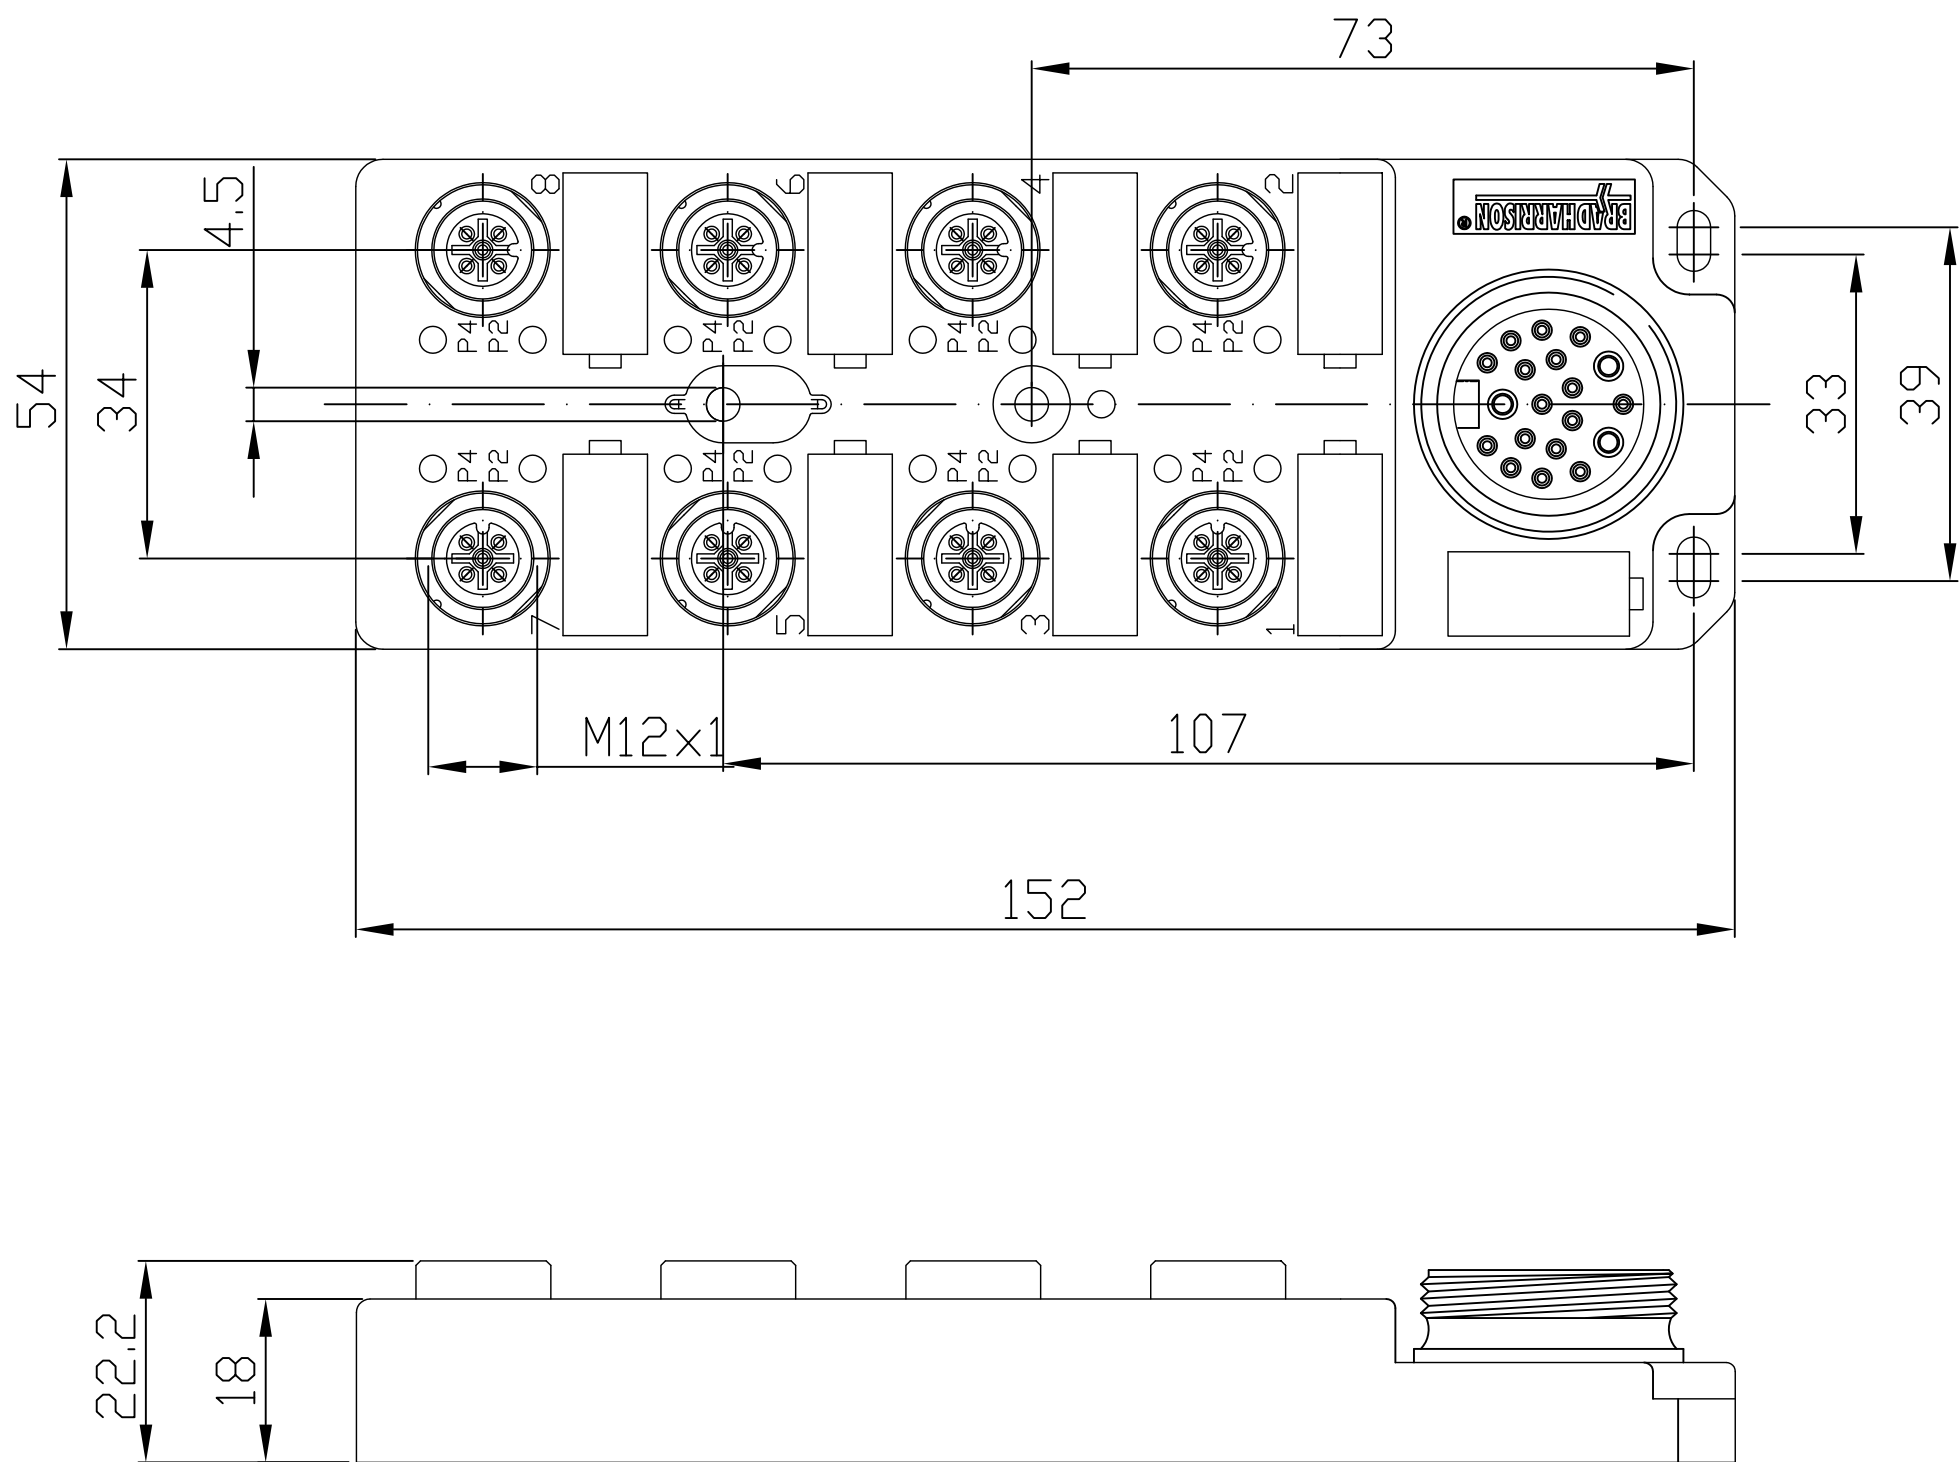




VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO +90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
2	O-RING	VITON	RED
3	RECEPTACLE SHELL	BRASS	NICKEL PLATED
4	HOUSING	PBT	YELLOW
5	LABEL	ABS	WHITE
6	LENS	NYLON	CLEAR

DESCRIPTION EC NO: WEU2010-0452 DRWN: BBRAUCH 2010/03/23 CHK'D: FP APPR: FPACHER 2010/03/24	QUALITY SYMBOLS ▽ = 0 ⌢C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY BBRAUCH	DATE 2010/03/23	MICRO-CHANGE MPIS TOP MOUNT 8PORT NO LED ----			
		4 PLACES ±---	±---	CHECKED BY FP	DATE 2010/03/23					
		3 PLACES ±---	±---	APPROVED BY FPACHER	DATE 2010/03/23	molex MOLEX INCORPORATED DOCUMENT NO. SD-120114-090 SHEET NO. 1 OF 1				
		2 PLACES ±---	±.01	MATERIAL NO. see table						
		1 PLACE ±0.3	±---							
		ANGULAR ± --- °			SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
1	REV									