




Elastische Einpresszone 2.5 mm / compliant pressfit zone 2.5 mm  
 Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles  
 Bauart 2 / type 2  
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2  
 Schichtaufbau im metallisiertem Loch siehe Zeichnung 164062 Nr.:6  
 hole design see ERNI-specification 164062 No.:6

- 1) 1.0 +0.09 -0.06 Durchmesser des metallisierten Loches  
 1.0 +0.09 -0.06 Diameter of finished plated- through hole

Bestückungsplan / contact layout

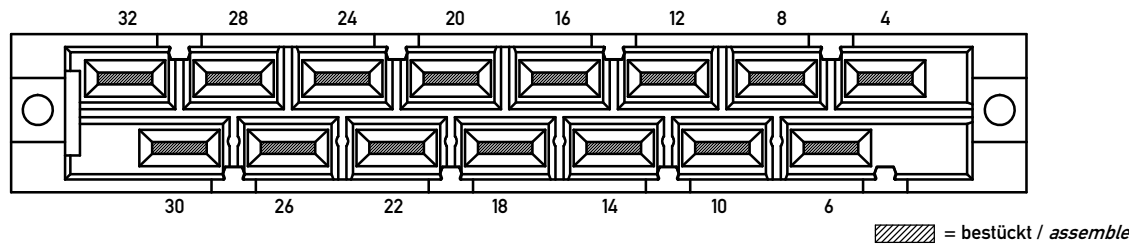

Leiterplatten-Layout / PCB-drillhole pattern

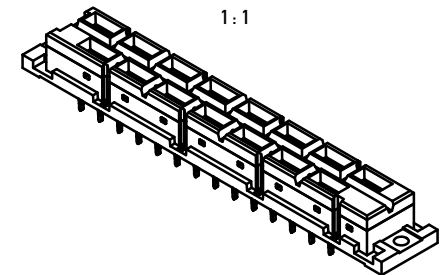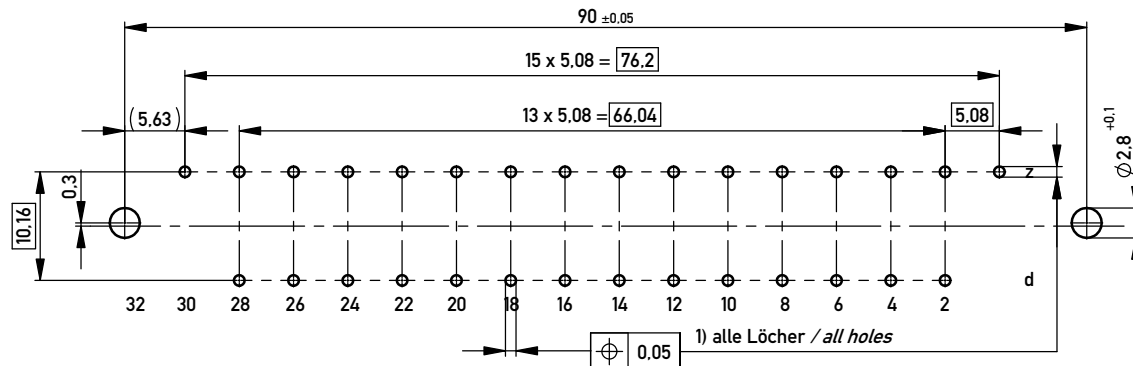

Information:		Tolerances	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		 All Dimensions in mm	Designation
			<b>Federleiste H15 EE</b> <b>Fem. Connector H15 Pressfit</b>
www.ERNI.com		<b>594752</b>	
f	01.07.2016	I	
Index	Date	A3	
Class		STVH15	

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 9006 to be observed.