




# 82355 BUS MASTER INTERFACE CONTROLLER (BMIC)

- Designed for use in 32-Bit EISA Bus Master Expansion Board Designs
  - Integrates Three Interfaces (EISA, Local CPU, and Transfer Buffer)
- Supports 16- and 32-Bit Burst Transfers
  - 33 Mbytes/Sec Maximum Data Transfers
- Supports 32-Bit Non-Burst and Mismatched Data Size Transfers
- Supports 32-Bit EISA Addressability (4 Gigabyte)
- Two Independent Data Transfer Channels with 24-Byte FIFOs
  - Expansion Board Timing and EISA Timing Operate Asynchronously
- Supports Peek/Poke Operation with the Ability to Access Individual Locations in EISA Memory or I/O space
- Automatically Handles Misaligned Doubleword Data Transfers with No Performance Penalty
- Supports Automatic Handling of Complete EISA Bus Master Protocol
  - EISA Arbitration/Preemption
  - Cycle Timing and Execution
  - Byte Alignment
  - 1K Boundary Detection
- Supports Local Data Transfer Protocol Similar to Traditional DMA
- Supports a General Purpose Command and Status Interface
  - Local and EISA System Interrupt Support
  - General Purpose Information Transfers
  - Set-and-Test-Functions in I/O Space (Semaphore Function)
  - Supports the EISA Expansion Board ID Function
- Supports Decode of Slot Specific and General I/O Addresses
- 132-Pin JEDEC PQFP Package  
(See Packaging Specification Order #240800, Package Type NG)

2

82355 Internal Block Diagram

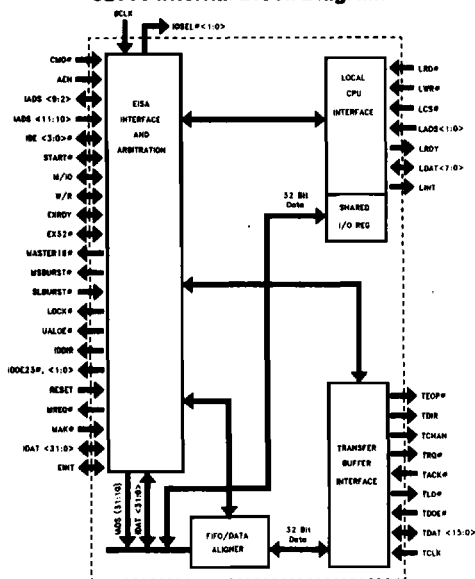

290255-1

The complete document for this product is available from Intel's Literature Center at 1-800-548-4725.

December 1995  
Order Number: 290255-008