
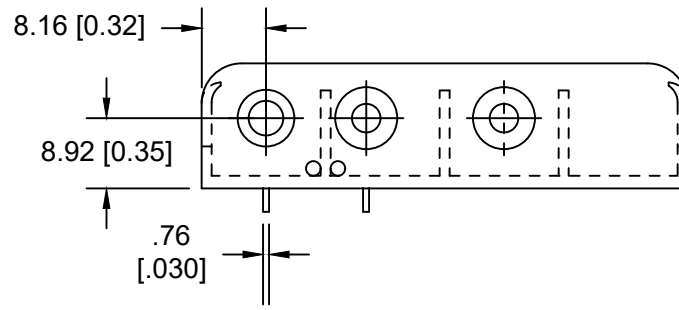
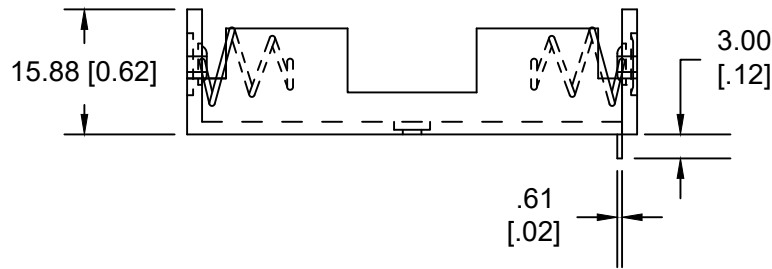



Ø4.57 x 1.01 DEEP
[0.180 x 0.040 DEEP]

Ø2.36 [Ø0.09]


3.56 [0.14]

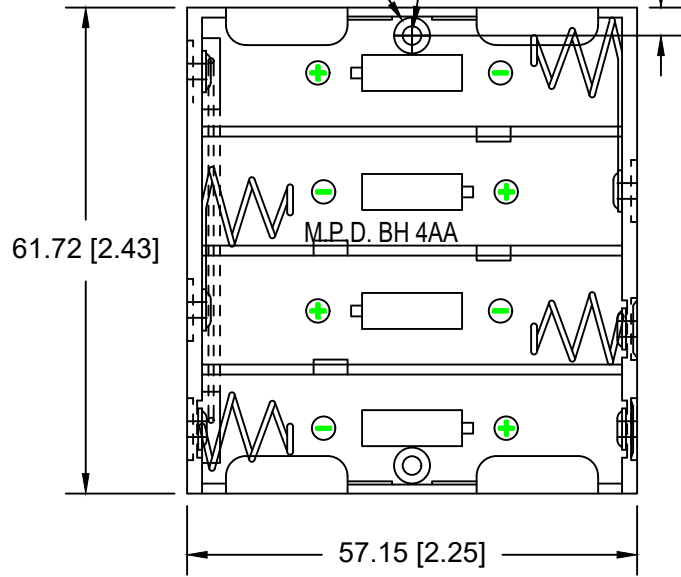

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	D	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
05/17/19	E	UL FILE NO. FOR MATERIAL CHANGED TO E130115	T.B.	B.S.	

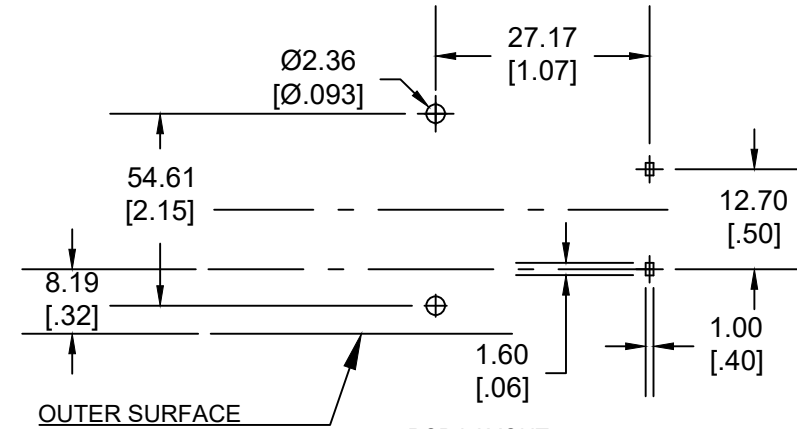

PCB LAYOUT

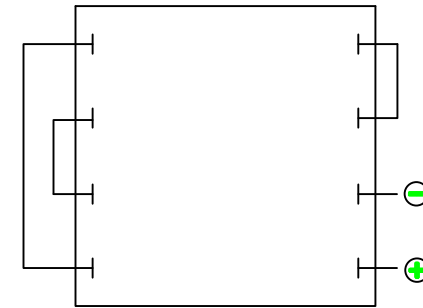


INTER CONNECTION SCHEMATIC

1. MATERIAL:

HOUSING :HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E130155
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: 302 STAINLESS STEEL, NICKEL PLATED.
 TEMPERATURE RANGE: -40°C TO +140°C
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 ROHS COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ±.8 (.030)	Title 4AA BATTERY HOLDER WITH PC PINS		
Angular ± 3°	Date 05/17/19	Drawing Number BH4AA-PC	