


REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
01	-	RELEASED NUMBER	2018-02-28	Nick	TOMMY		



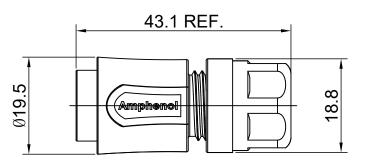



DIMENSION ØA	CABLE OD RANGE		
5.5 MM	1.5~5.0MM		
6.8 MM	2.5~6.5MM		

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

O-RING: SILICONE RUBBER.

BACK SHELL: THERMOPLASTIC, UL94 V-0. CLAMP NUT: THERMOPLASTIC, UL94 V-0. CLAMP RING: THERMOPLASTIC, UL94 V-0.

CABLE SEAL: EPDM. 2. Rohs Compliant.

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

QUANTITY PART N		IUMBER	DESCRIPTION		ITEM					
MATERIALS LIST										
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).		SIGNATURES	S DATE	Amphenol						
2) Tolerances are a	as follows:	DRAWN: Nick	2018-02-28	Amphenoi			<u> </u>			
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED: Tod	2018-02-28	Sine Systems - www.amphenol-sine.com			ine.com			
3) Note reference = X MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS: NEXT ASSY:		ENGINEER:		44724 Morley Drive Clinton Township, MI 48036						
		APPROVAL: Tommy	2018-02-28	J	reuniemp, reece					
		CUSTOMER:		ECO-MATE,CORD GRIP,						
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLED. ALL		RTS ,SIZE 8.						
				B c-	RTS0L-8	CG	A1			
				SCALE: NONE		SHEET 1	of 1			