



# 831/876 MHz Ceramic Duplexer

## Part Number: AM831-876D1006




<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
<b>Passband:</b>	814-849 MHz	859-894 MHz
<b>Bandwidth:</b>	Fo ± 17.5 MHz	Fo ± 17.5 MHz
<b>Passband Return Loss:</b>	15 min	15 min
<b>Passband Insertion Loss:</b>	2.6 dB max	2.6 dB max
<b>Passband Ripple:</b>	1.0 dB max	1.0 dB max
<b>Input / Output Impedance:</b>	50 Ohms	50 Ohms
<b>Isolation:</b>	25 dB min	25 dB min
<b>Power Handling:</b>	3 W	3 W

<u>Mechanical</u>	
<b>Mounting Method:</b>	SMT
<b>Dimensions:</b>	40.5 x 15 x 8 mm

<u>Environmental</u>	
<b>Operating Temperature:</b>	-20 to +70 deg.C
<b>Storage Temperature:</b>	-50 to +90 deg.C

This product is RoHs compliant.

### Outline Drawing:

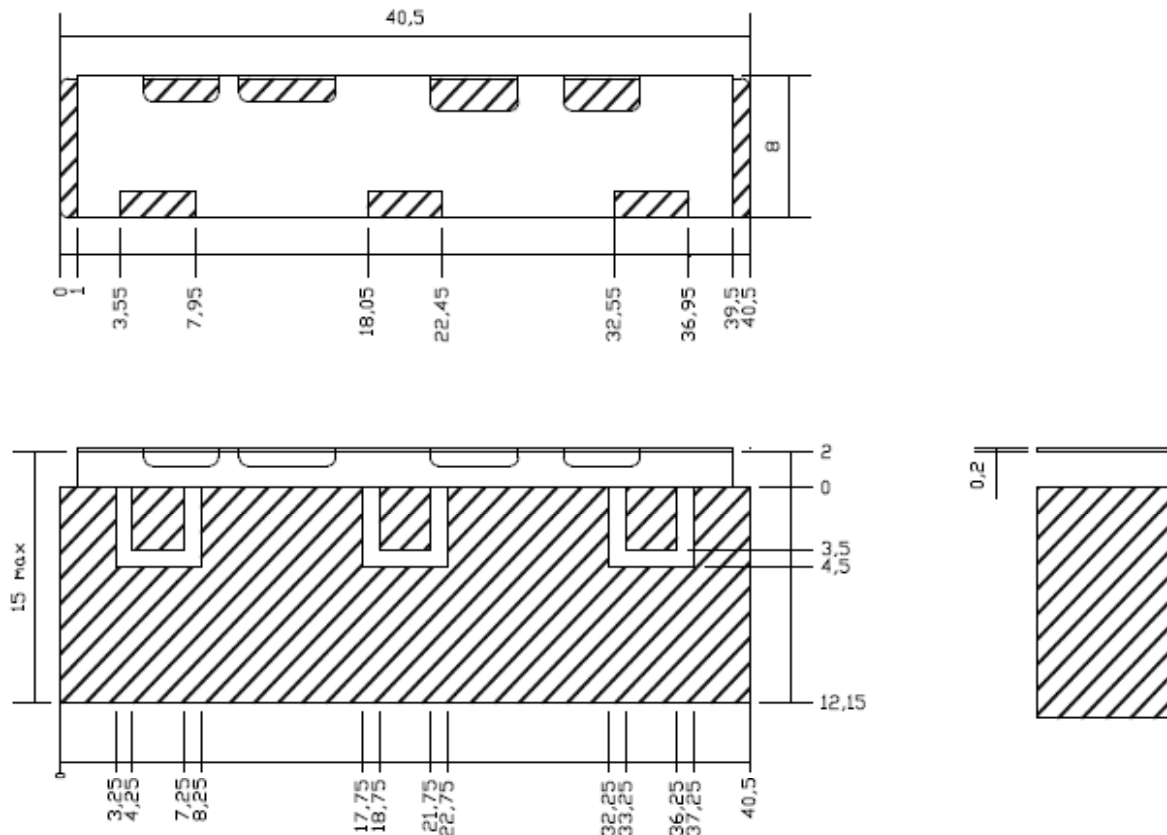



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 831/876 MHz Ceramic Duplexer

## Part Number: AM831-876D1006



### Response Plot:

