## 2.7" Front Light Panel

11103-xx | Product Data Sheet | 2020



### **Overview**

The **FLEx Front Light Panel** optical film is designed to laminate to the front surface of **Sharp reflective display (LS027B7DH01)** to provide high quality on-demand display lighting. This thin plastic panel incorporates only a single LED which enables product designers to develop ultra-thin devices and minimize battery use.

- One low-power LED (included in Front Light)
- Over 80x less power compared to traditional backlighting
- 0.05 mm thick FLEx film is over **5x thinner** than alternative lightguides
- Simple I/F and Connectivity to System Board

For more information:


WEB flexlighting.com


CONTACT flexlighting.com/contact

PHONE 773-295-0305





### **Mechanical**

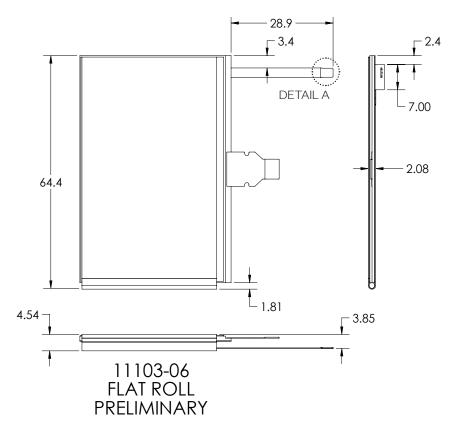


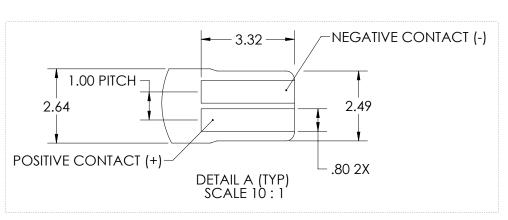

Flexible film allows for different placement options for the light source (examples below)







All dimensions in mm

# 2.7" Front Light Panel

11103-xx | Product Data Sheet | 2020



### **Electrical**

Item	Symbol	Typical	Absolute Max	Unit
Forward Current	I <sub>F</sub>	10	25	mA
Pulse Forward Current	I <sub>EP</sub>		80	mA
Reverse Voltage	V <sub>R</sub>		5	V

For more information:


WEB flexlighting.com

CONTACT flexlighting.com/contact

PHONE 773-295-0305


#### **Example ZIF Connectors:**


- Molex 503480-0400
- Molex 52745-0497
- Molex 54550-0471
- Molex 54548-0471 (bottom)
- Molex 505110-0492

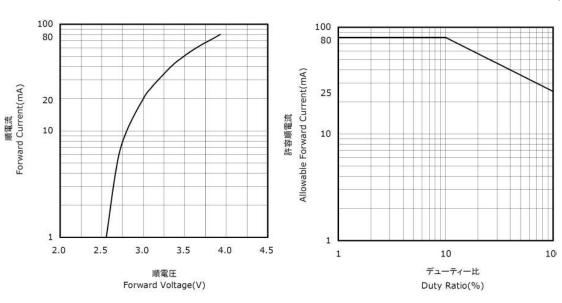

### **Optical**

2.7" Sharp + Front Light (11103-xx)							
Item		Symbol	TYP.	Unit	Remark		
Viewing Angle CR >2	V	Θ 11 Θ 12	65 65	° (Degree)	[Remark 1]		
	Н	Θ 21 Θ 22	30 40	° (Degree)			
Contrast Ratio	Front light ON	CR	10		[Remark 2]		





Remark 2: Definition of Contrast Ratio

 $Contrast Ratio (CR) = \frac{Reflection intensity in white display}{Reflection intensity in black display}$ 

Measurements taken with a Minolta Chroma Meter CS-100 at a 17" view distance