



Electrical specifications

Center Frequency: 737 MHz
Bandwidth: 18 MHz
VSWR in BW: 12 dB min.
Input / Output Impedance: 50 Ohms
Passband: 728-746 MHz
Passband Insertion Loss: 3.0 dB max.
Passband Ripple: 0.5 dB max
Rejection: 30dB min. @ 658-676 MHz
Rejection 2: 30 dB min. @ 798-816 MHz
Rejection 3: 30 dB min. @ 868-886 MHz
Power Handling: 1 W

Mechanical




Mounting Method: SMT
Dimensions: 13 x 12 x 6 mm max

Environmental

Operating Temperature: -20°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

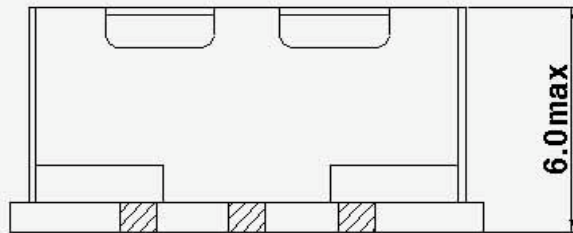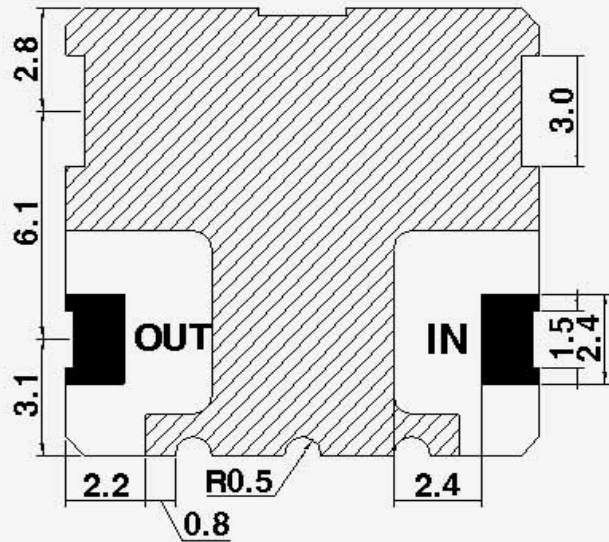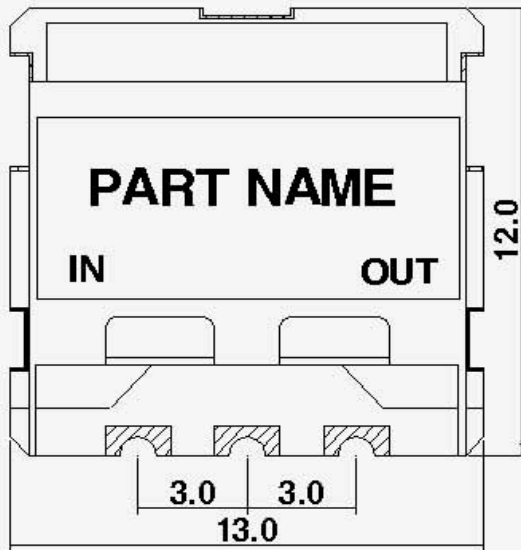

■ : I/O PORT

▨ : GROUND

**TOLERANCE UNLESS
OTHERWISE SPECIFIED : ±0.2
DIMENSIONS : mm**



Response Plot:

