
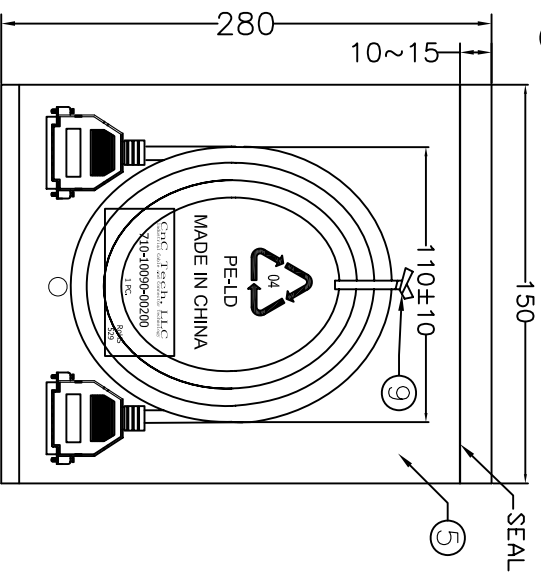


UNIT:MM

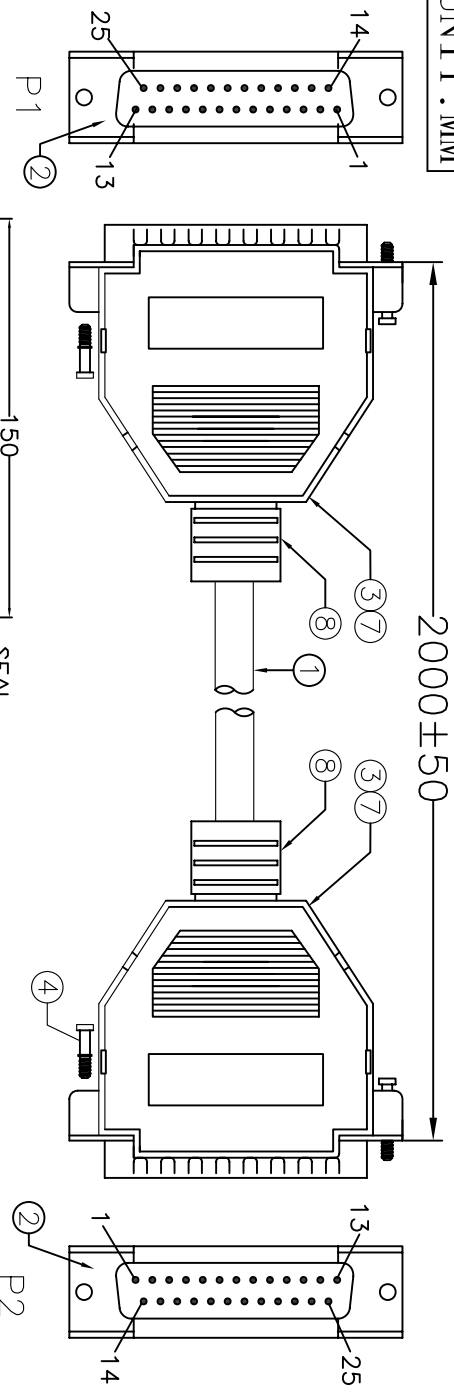

Electronic Test:  
 1. 100% Test,(Open,Short, Miss Wire)  
 2. Contact Resistance:2 ohm max.  
 3. Insulation Resistance:5M ohm min.  
 4. Hi-Pot:300V DC.

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHELL	SHELL

⑨	TIE	1	WHITE L=100mm
⑧	S/R	5.5g	BEIGE(IV-29#) 45P PVC (MOULD NO.SR-51-1)
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5mm,L30mm
⑥	PE BAG	1/10	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑤	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
④	SCREW	4	SCREW #4-40UNC L=12.5mm,NICKEL PLATED
③	DKN	2	DB25P DKN W/O NUT BEIGE
②	CONN	2	DB25P MALE SOLDER TYPE PIN G/F,BLUE INSULATION
①	CABLE	1	NOUL 28AWG*25C+D+AL OD6.5mm COLOR BEIGE(IV-29#) L=2000± 15mm
NO.	NAME	QTY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10090-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECT	