

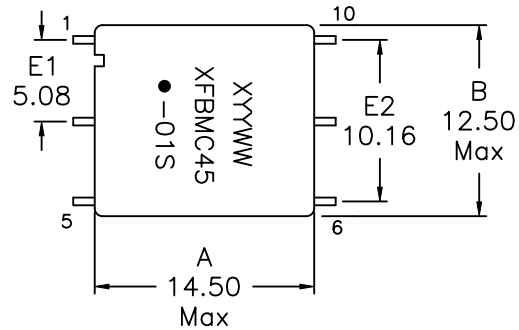


1. Mechanical Dimensions:

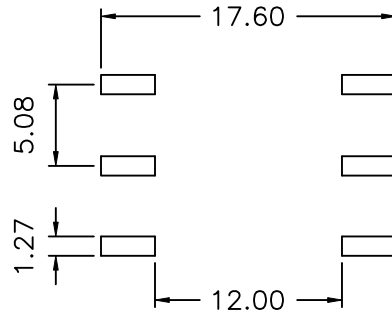

Top view

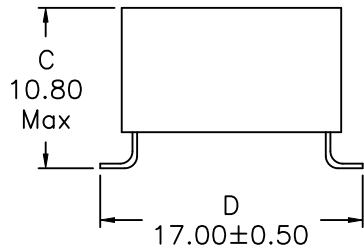


SUGGESTED FOOTPRINT

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +125°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: 0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Recommended IR Reflow peak temp of 235°C Max.
12. AEC-Q200 Certified Component
13. Designed to meet UL60950 for Reinforced Insulation

2. Schematic:

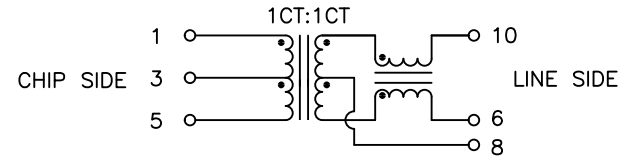

3. Electrical Specifications: @25°C

UTP Impedance: 100 OHMS

Turns Ratio: (CHIP : UTP)=1CT:1CT ±2%

Isolation Voltage: 4500 Vrms (CHIP to LINE)

UTP Side OCL: 350uH Minimum @100KHz, 100mV 30mADC

UTP Side Q: 8 Minimum @100KHz, 100mV

Rise Time (10-90%): 2.0ns Typical

Insertion Loss (1M-100MHz): 1.0dB Maximum

Return Loss(5-100MHz): -15dB Typical


CMRR (1-100MHz): -40dB Typical

DOC. REV: A/3

XFMR[®] www.XFMRS.com	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: XFBMC45-01S-A	REV. A
TOLERANCES: .xx ±0.25	DWN.	Yu	Sep-04-20
Dimensions in MM	CHK.	YK Liao	Sep-04-20
SHEET 1 OF 1	APP.	BW	Sep-04-20

XFMRs


Recommended Infrared Reflow Temperature Profile for RoHS Compliant Parts

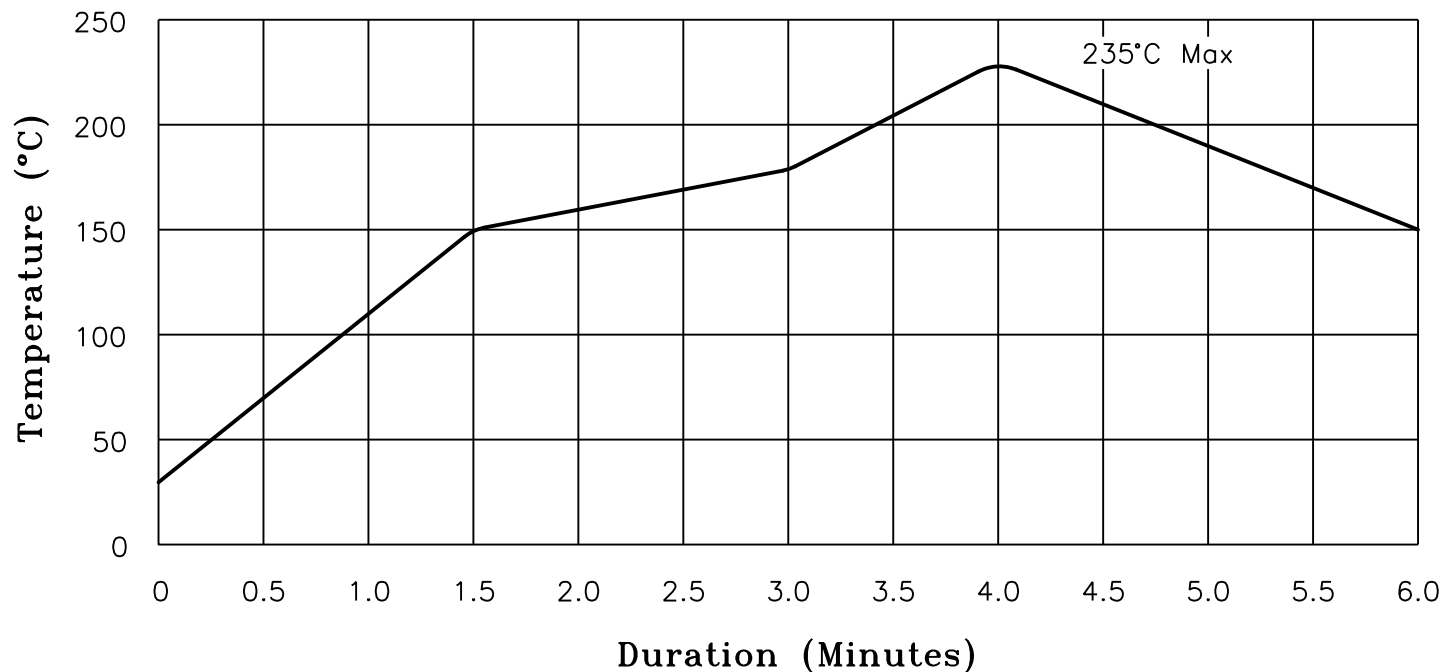

NOTES: Maximum duration at 235+0/-5° shall be 10-15 seconds.
 Maximum duration above 217° shall be 45-75 seconds.
 ALL Temperatures refer to topside of the package, measured on the package body surface.
 *Excludes ALL RJ-45 Combo products. (See IR Reflow for Non-RoHS Compliant parts)

XFMRs Inc www.XFMRs.com	Title: IR REFLOW CHART (RoHS Compliant parts)			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A	P/N: N/A	REV. A	
	DWN.	廖玉坤	Aug-18-05	
	CHK.	李清儿	Aug-18-05	
SHEET 1 OF 1	APP.	Isaiah M	Aug-18-05	

TAPE AND REEL SPECIFICATION:

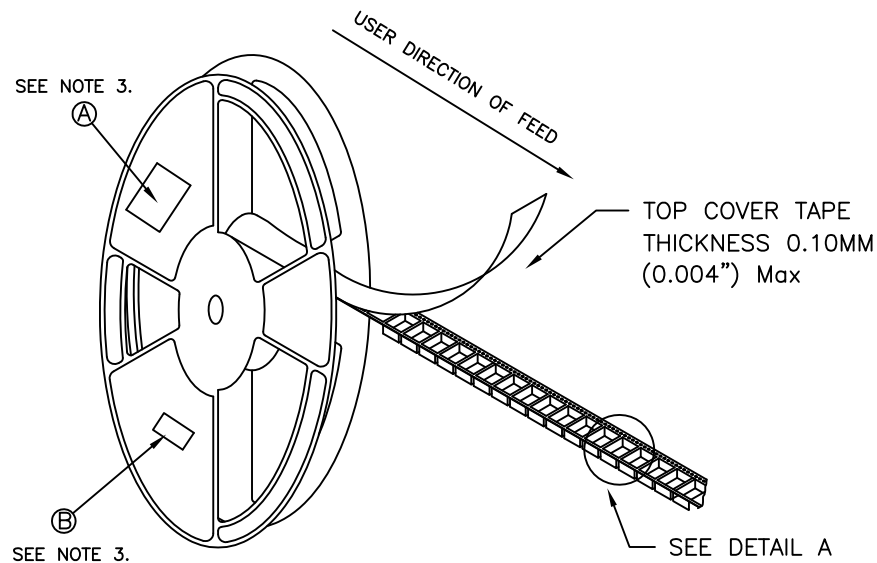


REEL AND TAPE ORIENTATION

13" REEL DIAMETER

NOTES:

- 1) PROCESS IN ACCORDANCE WITH EIA-481-2 STANDARDS
 - *TAPE LEADER DIMENSION 15.30" MIN.
 - *TAPE TRAILER DIMENSION 6.30" MIN.
- 2) PARTS SHOULD BE PACKAGED IN ACCORDANCE WITH ESD GUIDELINES IN EIA-541.
- 3) REEL LABEL: 'A' * PART NUMBER
 - * QUANTITY
 - * DATE CODE
- 4) 250pcs PER 13" REEL

DETAIL A

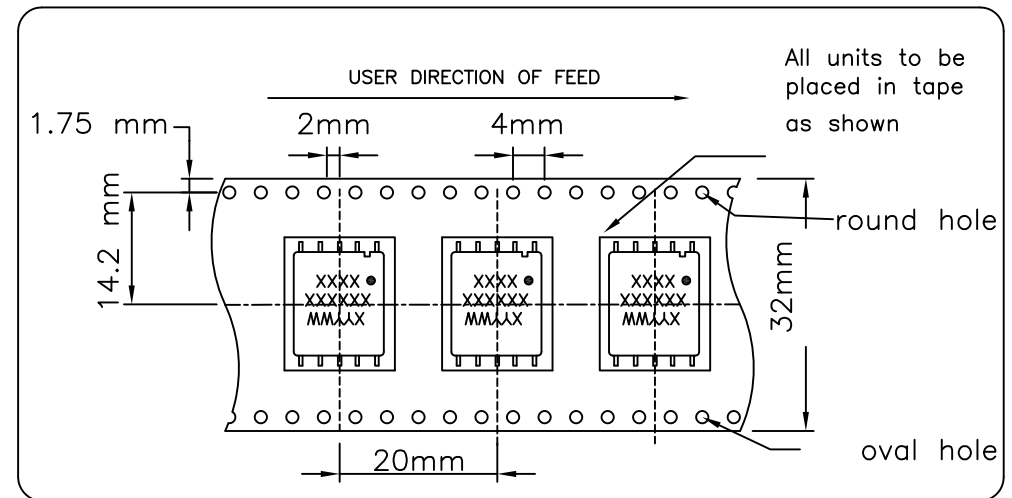

DOC REV:A/1

XFMRs® www.XFMRs.com		Title: T&R SPEC		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±xxxxx Dimensions in mm	P/N:95-STFM-01-WT		REV. A	
	DWN.	Kong	May-08-19	
	CHK.	YK Liao	May-08-19	
SHT 2 OF 2	APP.	BW	May-08-19	

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.