

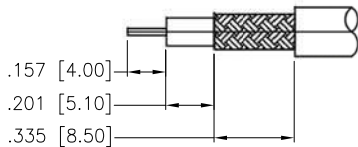

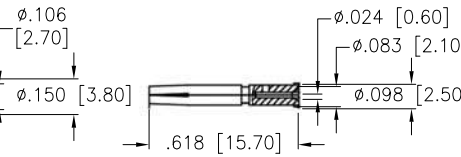
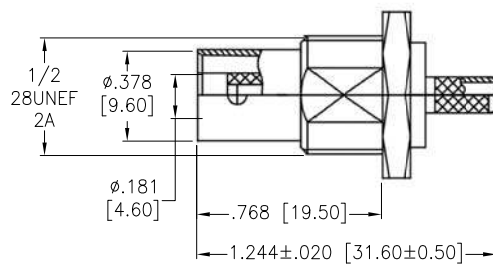




6	5	4	3	2	1
APPROVED: _____			Rev	AWO #	Description
DATE: _____ TITLE: _____			-		RELEASED
					Date
					5/23/16
					Appr



RECOMMENDED
CABLE STRIPPING DIM'S

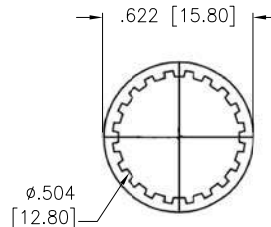

1/2-28UNEF-2B

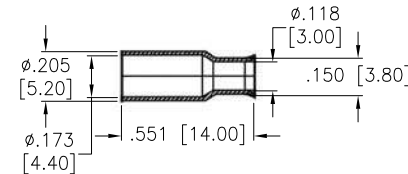

NUT	ZINC	NICKEL
LOCK WASHER	IRON	NICKEL
GASKET	RUBBER	NATURAL
FERRURLE	BRASS	NICKEL
SLEEVE	POM	NATURAL
CONTACT PIN	BRASS	NICKEL
WASHER	IRON	NICKEL
INSULATOR	POM	NATURAL
BODY	ZINC	NICKEL
DESCRIPTION	MATERIAL	FINISH

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-4 GHz
 Working Voltage: 500 Vrms max
 Dielectric withstanding voltage: 1,500 Vrms min
 Contact Resistance: 2.1 Milliohms max (Center Contact)
 0.2 Milliohms max (Outer Contact)
 Insulator Resistance: 5000 Megohms min
 Temperature Rating:
 Operating temperature: -65°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES HOLES		
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	HR	5/23/16
CHECKED	OC	5/23/16
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **BNC FEMALE BULKHEAD CRIMP FOR RG174, RG178, RG196, RG316**

SIZE	PART NO.	REV.
X	RF1-04A-D-02-50	-
REF: S00049T	SCALE: NTS	SHEET 1 OF 1