


LAPP Industrial Data Communication (IDC) Stock Program

Flexible Industrial Ethernet Cordsets

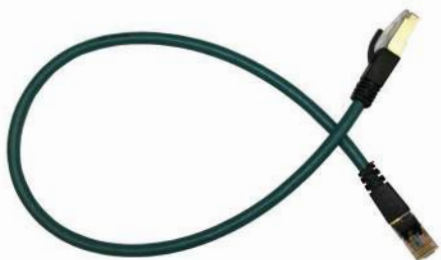

These molded cordsets utilize high quality ETHERLINE® CAT.5e 4 pr flexible cable with overmolded RJ45 connectors. For motion applications, these cordsets are designed to provide interconnection between simple devices (sensors and actuators) and high level devices (PLCs and computers)

Connector 1	Connector 2	Cable Length	Part number
RJ45 Shielded	RJ45 Shielded	0.5m	523359-0.5
		1m	523359-1
		2m	523359-2
		2.5m	523359-2.5
		3m	523359-3
		4m	523359-4
		5m	523359-5
		10m	523359-10
		15m	523359-15

Technical data

Material:		Rated voltage:	42V 125V (not for power applications)
- contact carrier:	polycarbonate	Rated current:	1.5A
- molded head:	PVC; black (color is typical, not standard)	Cable:	2170300
- contacts:	gold-plated brass	Conductor stranding:	stranded bare copper
- shield:	foil & tinned copper braid	IP Protection class:	IP20 NEMA 1
- cable jacket:	polyurethane; teal		
- conductor insulation:	polyethylene		
Temperature range:	-20°C to +70°C		

Industrial Ethernet Cables

Part number	Category	Pairs	AWG	Application Type	Outer diameter		Jacket	Description Detail
					in	mm		
2170888	CAT 5	2	22	Torsion	0.256	6.5	PUR	ETHERLINE® Torsion P CAT.5 2pr 22 AWG
2170289	CAT 5e	2	26	Cont. Flex	0.240	6.1	PUR	ETHERLINE® FD P CAT.5e 2pr 26 AWG
2170297	CAT 5e	4	24	Stationary	0.248	6.3	PUR	ETHERLINE® P CAT.5e 4pr 24 AWG
2170300	CAT 5e	4	24	Flexible	0.240	6.1	PUR	ETHERLINE® P Flex CAT.5e 4 pr 26 AWG
2170450	CAT 5e	4	22	Flexible	0.380	9.6	PVC	ETHERLINE® Tray CAT.5e Y 4 pr 22 AWG
2140489	CAT 5e	4	26	Cont. Flex	0.248	6.3	PUR	ETHERLINE® FD P CAT.5e 4 pr 26 AWG
2170488	CAT 6	4	26	Cont. Flex	0.307	7.8	PUR	ETHERLINE® FD P CAT.6 4pr 26 AWG
2170464	CAT 6A	4	22	Stationary	0.343	8.7	PVC	ETHERLINE® CAT.6A Y 4pr 22 AWG
2170484	CAT 6A	4	24	Cont. Flex	0.355	9.0	PUR	ETHERLINE® FD P CAT.6A 4pr 24 AWG
2170474	CAT 7	4	22	Stationary	0.343	8.7	PVC	ETHERLINE® CAT.7 4pr 22 AWG

Industrial Ethernet Connectors

Part number	Category	Conductors	Conductor size		Cable outer diameter		Color Code	Description Detail
			stranded	solid	in	mm		
RJ45								
21700605	CAT 5e	4	27 - 22 AWG (7 wire)	24 - 22 AWG	0.917 - 0.354	5.0 - 9.0	PROFINET®	RJ45 - CAT.5e, field wireable, PROFINET®
21700600	CAT 6A	8	27 - 22 AWG (7 wire)	24 - 22 AWG			T568A	RJ45 - CAT.6A, field wireable, T568A
21700601	CAT 6A	8	27 - 22 AWG (7 wire)	24 - 22 AWG			T568B	RJ45 - CAT.6A, field wireable, T568B
21700615	CAT 6A	8	27 - 24 AWG (19 wire)	26 - 24 AWG			T568A	RJ45 - CAT.6A, field wireable, T568A
21700616	CAT 6A	8	27 - 24 AWG (19 wire)	26 - 24 AWG			T568B	RJ45 - CAT.6A, field wireable, T568B
RJ45 90 degree								
21700639	CAT 6A	T568A	26 AWG (19 wire)	26-24 AWG	0.217 - 0.394	5.5 - 10.0	T568A	RJ45 - CAT.6A, field wireable, 90 degree, T568A
21700640	CAT 6A	T568B	26 AWG (19 wire)	26-24 AWG			T568B	RJ45 - CAT.6A, field wireable, 90 degree, T568B
M12								
21700648	CAT 5	D-Coded	26 - 22 AWG (7 wire)	24 - 22 AWG	0.197 - 0.240	5.0 - 6.1	D-Coded	M12-CAT.5, field wireable, D-Coded, Male, 4pos, TIA 568
C5E203C	CAT 5e	D-Coded			0.236 - 0.315	6.0 - 8.0	D-Coded	M12-CAT.5e, field wireable, D-Coded, Male, 4pos, PROFINET®
21700602	CAT 6A	X-Coded	27 - 22 AWG (7 wire)	24 - 22 AWG	0.197 - 0.382	5.0 - 9.7	X-Coded	M12-CAT.6A, field wireable, X-Coded, Male, 8pos

PROFINET® is a registered trademark of the PNO (PROFIBUS User Organization).

If not otherwise specified, all values relating to the product are nominal values.

Photographs are not to scale and are not true representations of the products in question.

