

	T	۵	нт. П	m	0



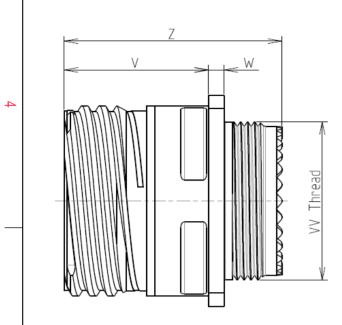

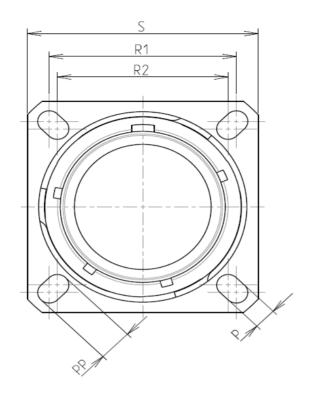

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 11.9 g ± 10%

8D 0

G

11

Ζ

99

Ρ


F

Е

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

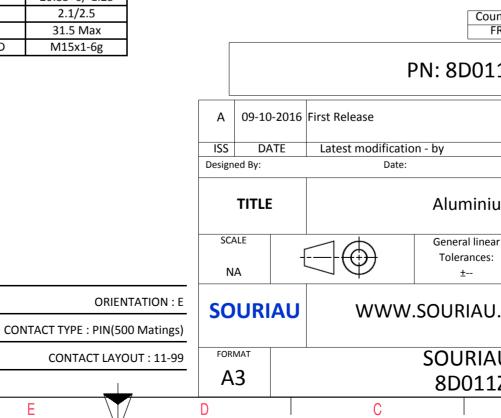

	ω		A			
		I				
					4	
		1				
	1					
					0	
AS EXA	AMPLE				3	
' anv i	non-conformit	ty or damage	<u>.</u>			
r any non-conformity or damage s which does not comply with						
er of the Parties or by a third party ndation, technical notice.)						
intr <i>i</i>	lurice	liction & Con	trollist] 1		
untry FR	JULISC	Not Listed			2	
1Z99PE						
.1237FL						
	1			MOD N°		
		CUSTOME	R DRAWING			
um	m Receptacle 8D series					
ar		ΝΙΟΦΠΟ	/ PROJECT			
			359		1	
This document is the property of						
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission					
communicated without permission						
U DRG N° SHEET LZ99PE-C 1/2						
129	B B		A	±/ £	J	
	0	I				

	Ξ	۵	н п	m	D	0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c} & & & & \\ & & & & \\ & & & & \\ & & & & $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positi ID A A B C C C D E F G Shell Arrangement Numb size no.	(mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00) 065 (1.65) 000 (0.00) 006 (0.00) +.000 (0.00)]		¥ ~	
ى ن	11 -99 7					Dim ØA ØAA R1 ØT
	_					
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D011Z
					A 09-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Aluminium
_					SCALE NA	General linear Tolerances: ±
					SOURIA	
				_	FORMAT A3	SOURIAU 8D011Z9
	Н	G	F	E	D	С

