

BARBARA-G2-W

~40° wide beam compatible with LEDiL HEKLA

SPECIFICATION:

Dimensions Ø 70.0 mm

Height 41.9 mm

Fastening socket

ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialBARBARA-G2-WReflectorPC

Colour Finish Coating metal

ORDERING INFORMATION:

Component


F16365_BARBARA-G2-W

» Box size: 480 x 280 x 300 mm

Qty in box MOQ MPQ Box weight (kg) 252 90 18 4.8




PRODUCT F16365_BARBARA-G2-W

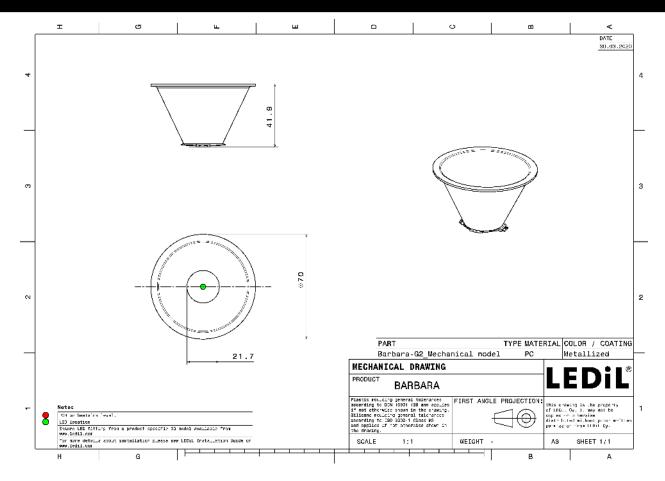


See also our general installation guide: www.ledil.com/installation_guide

3/20




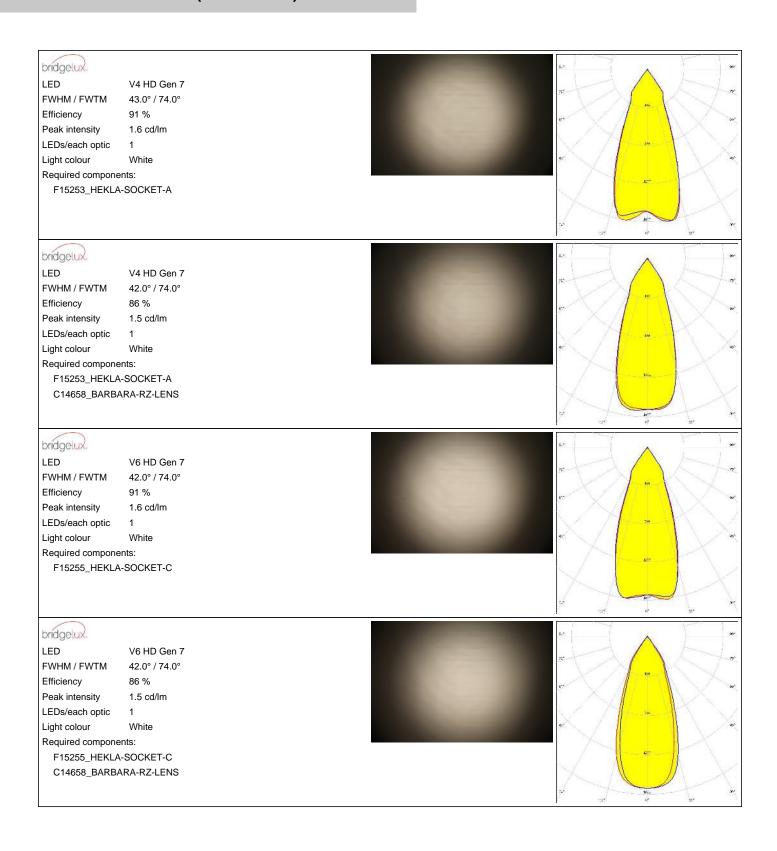




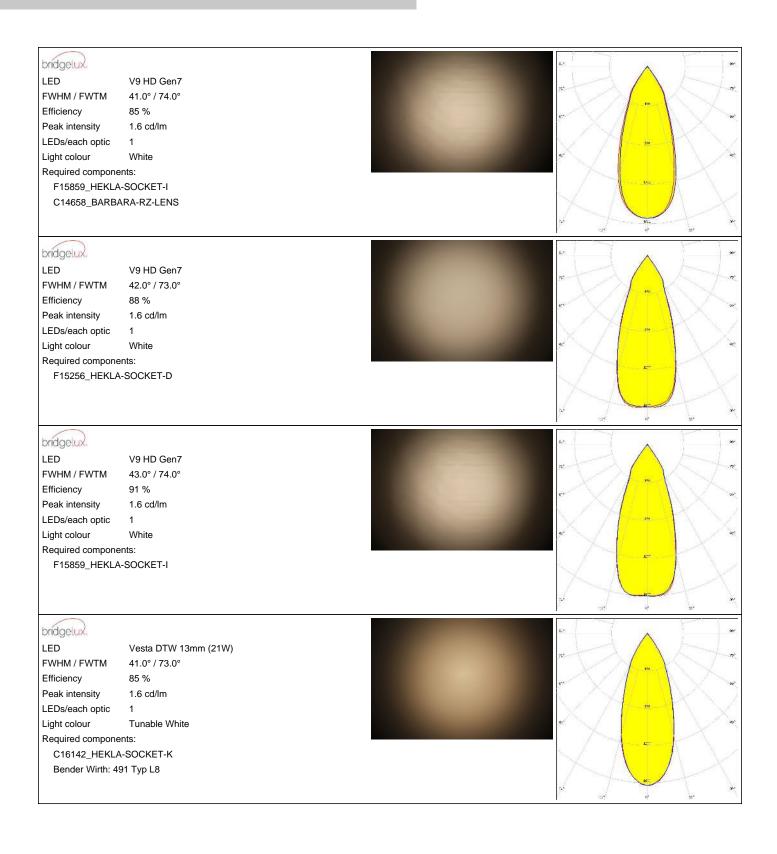




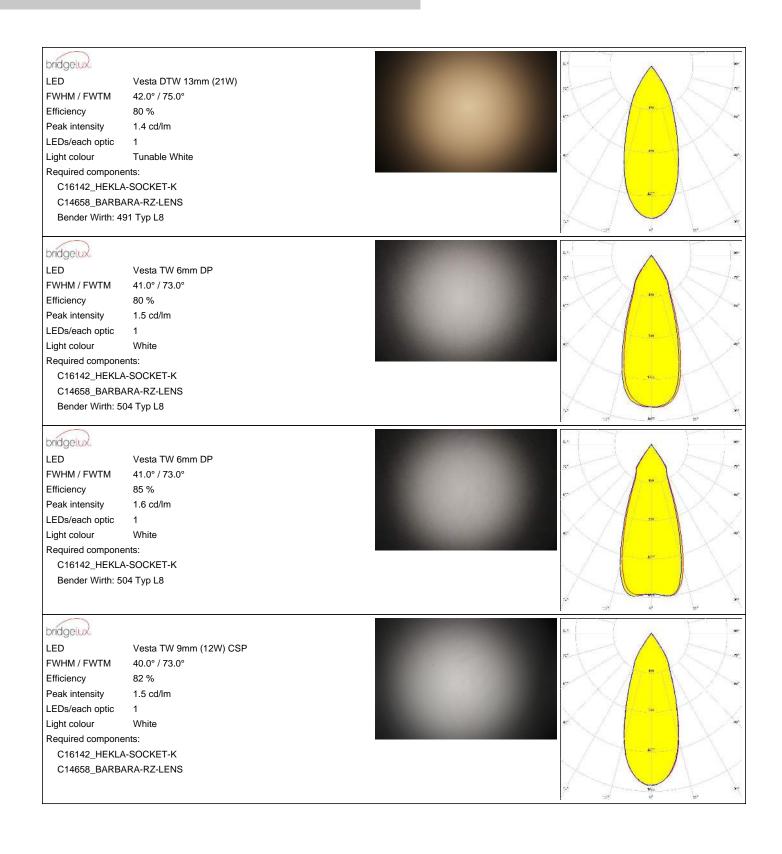




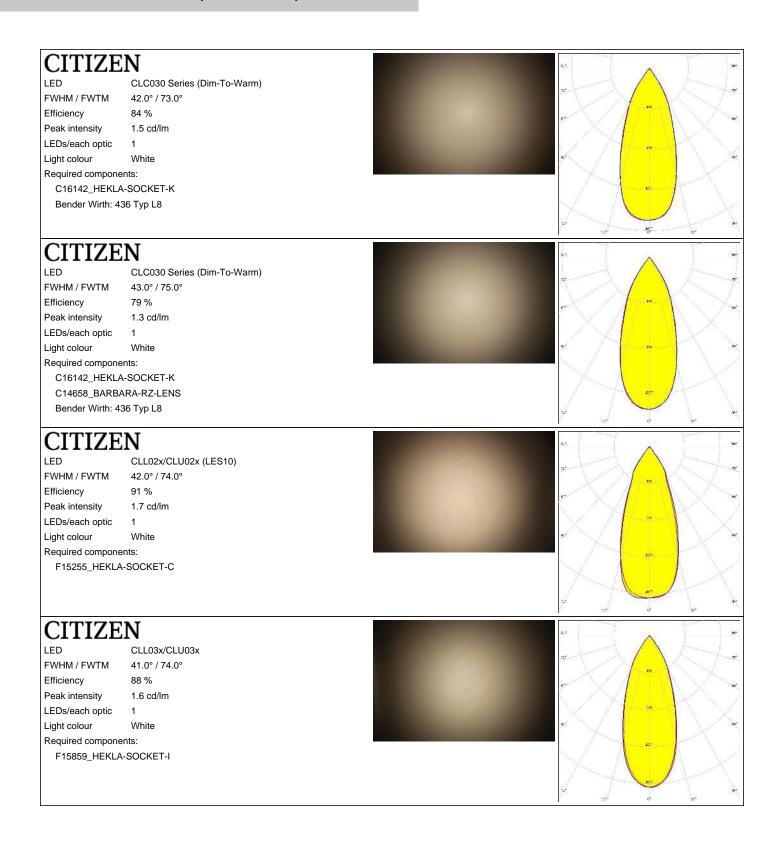




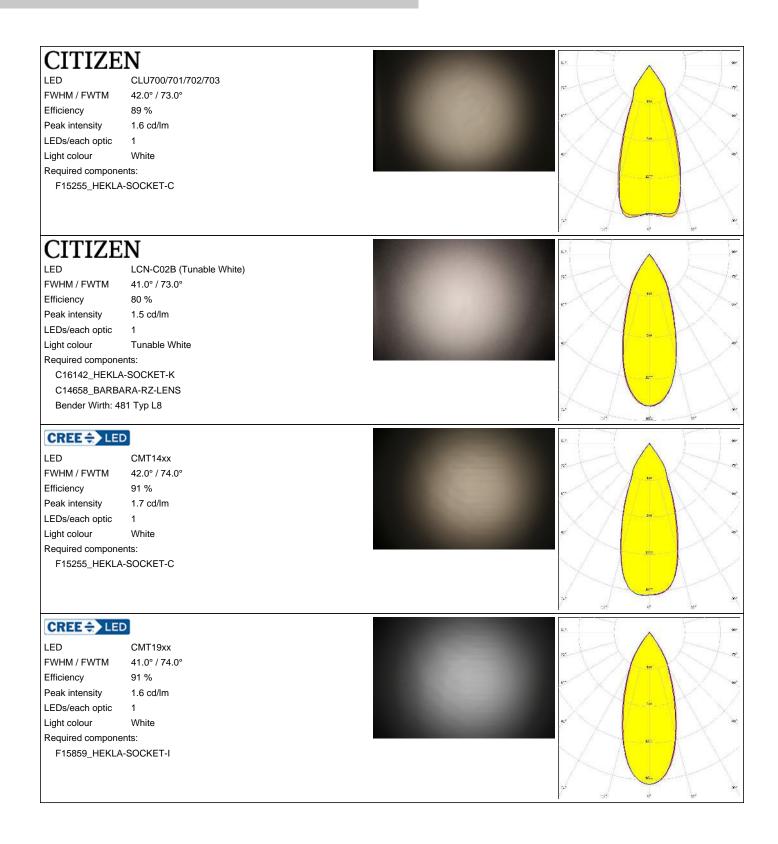




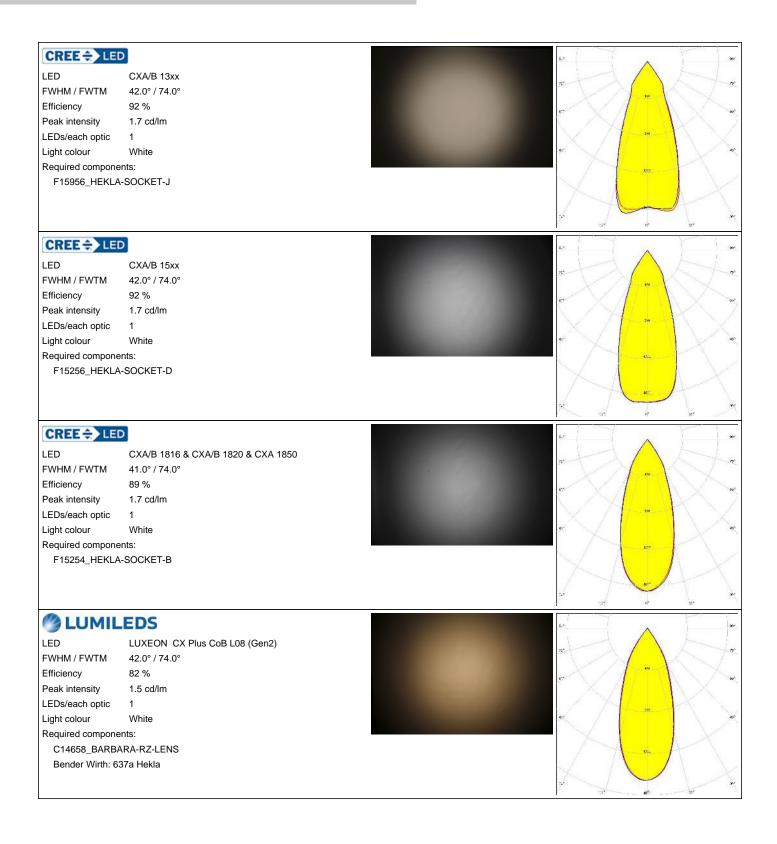




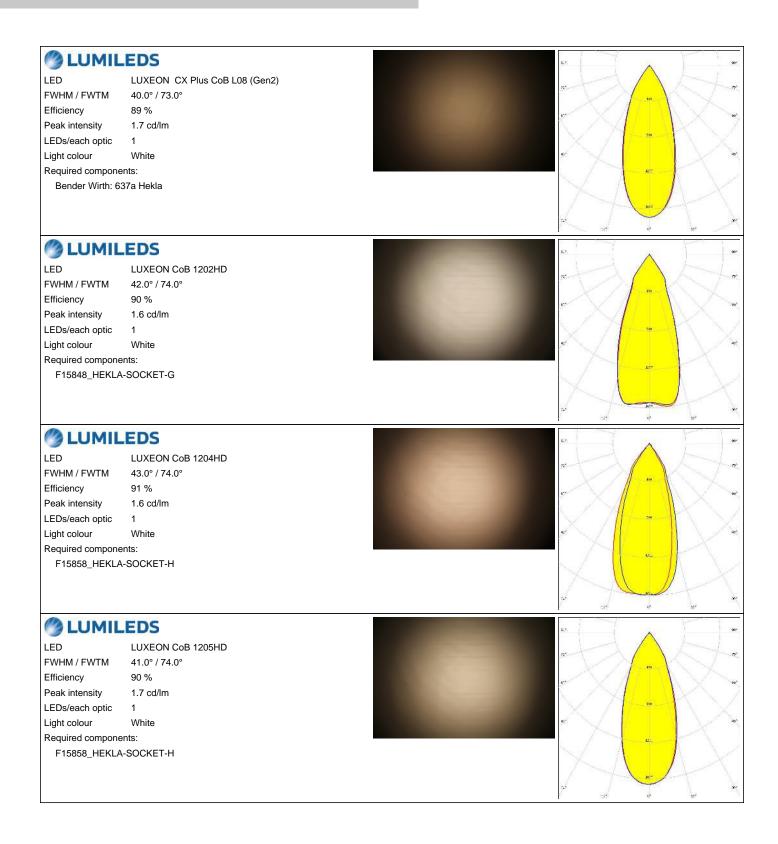




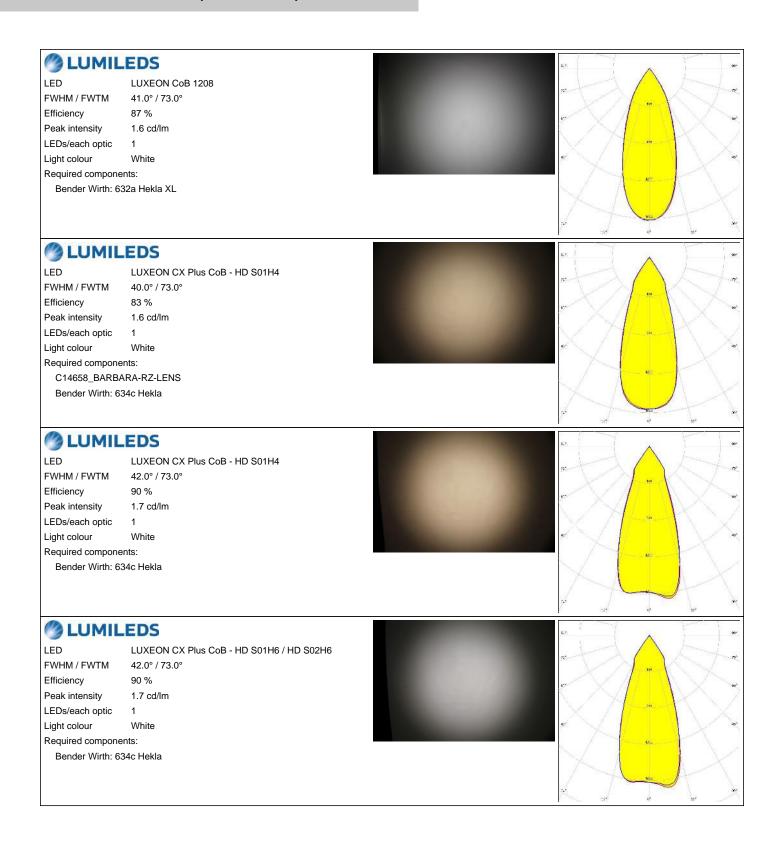




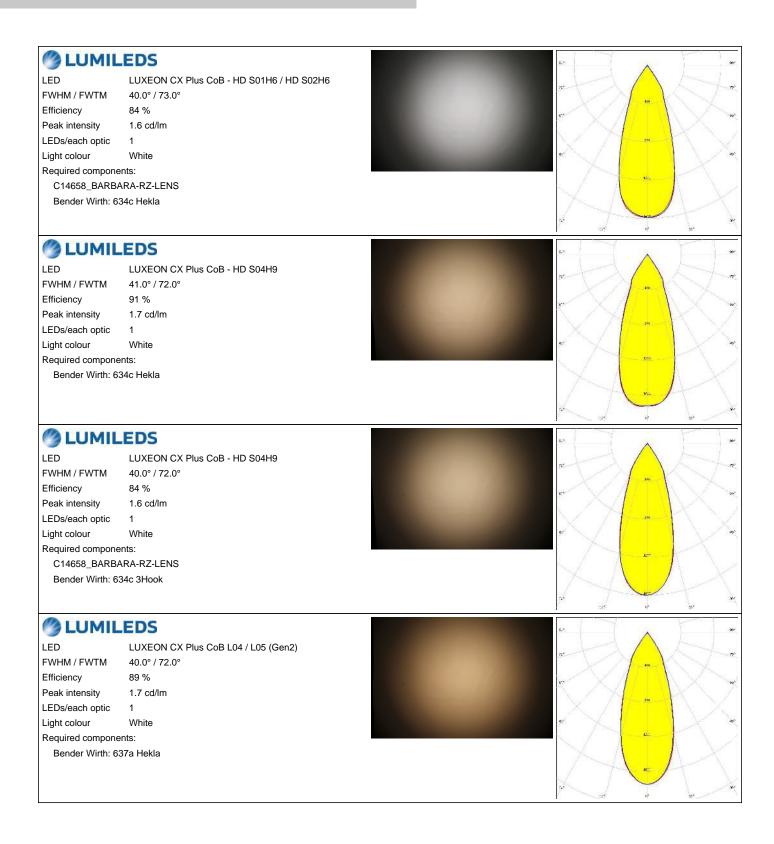



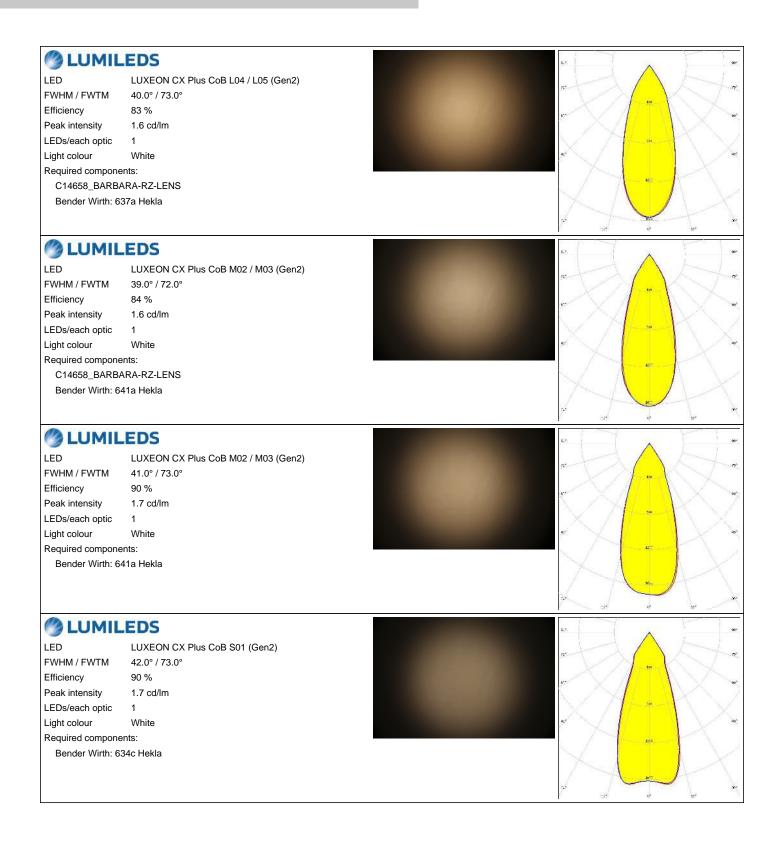



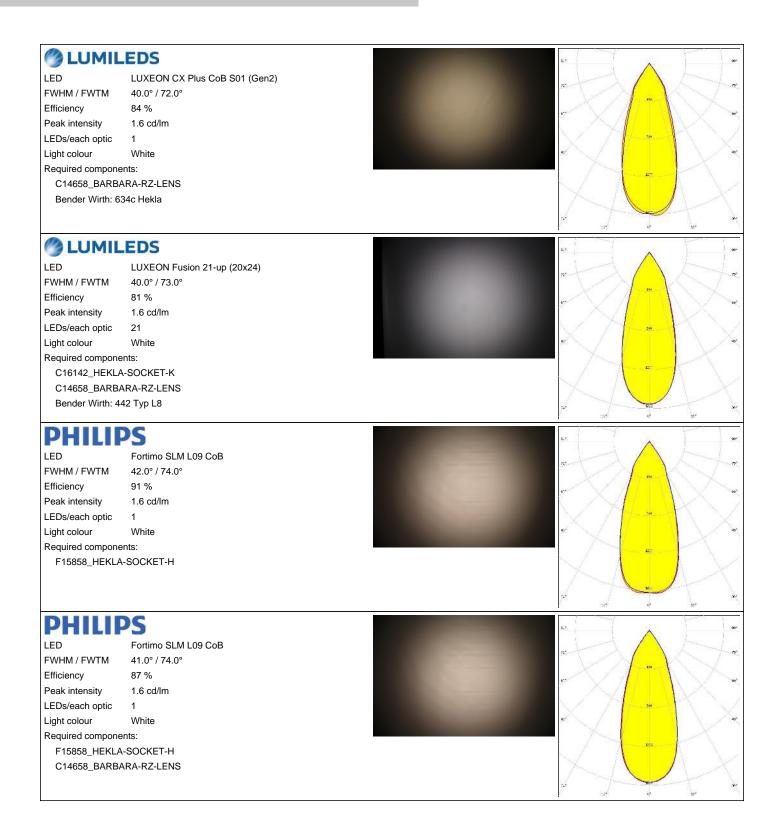




PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 40.0° / 72.0°
Efficiency 88 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

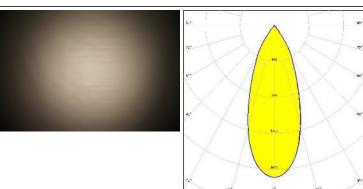

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 41.0° / 74.0°


Efficiency 83 %

Peak intensity 1.5 cd/lm

LEDs/each optic 1

Light colour White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 432 Typ L8

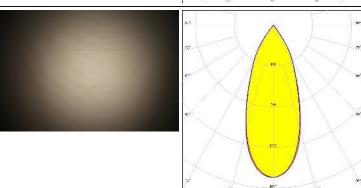


PHILIPS

LED Fortimo SLM L15 CoB

FWHM / FWTM 43.0° / 75.0° Efficiency 82 % Peak intensity 1.4 cd/lm LEDs/each optic 1

Light colour White
Required components:
C16142_HEKLA-SOCKET-K
C14658_BARBARA-RZ-LENS

Bender Wirth: 432 Typ L8

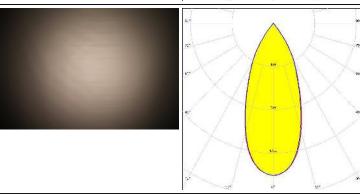


PHILIPS

LED Fortimo SLM L15 CoB

FWHM / FWTM 42.0° / 73.0°
Efficiency 88 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

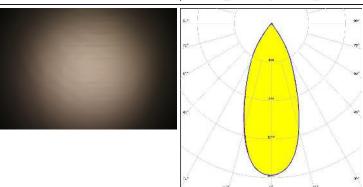




SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 41.0° / 74.0°
Efficiency 89 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

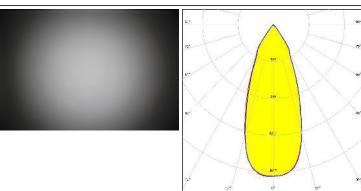


SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 41.0° / 74.0°
Efficiency 89 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

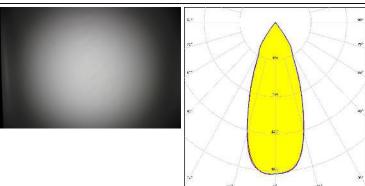

SAMSUNG

 LED
 LC010C G2


 FWHM / FWTM
 42.0° / 73.0°

 Efficiency
 89 %

 Peak intensity
 1.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

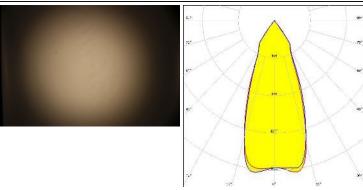


SAMSUNG

LED LC020T (Tunable white)


FWHM / FWTM 39.0° / 72.0°
Efficiency 85 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

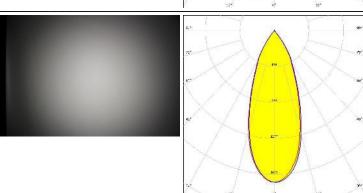




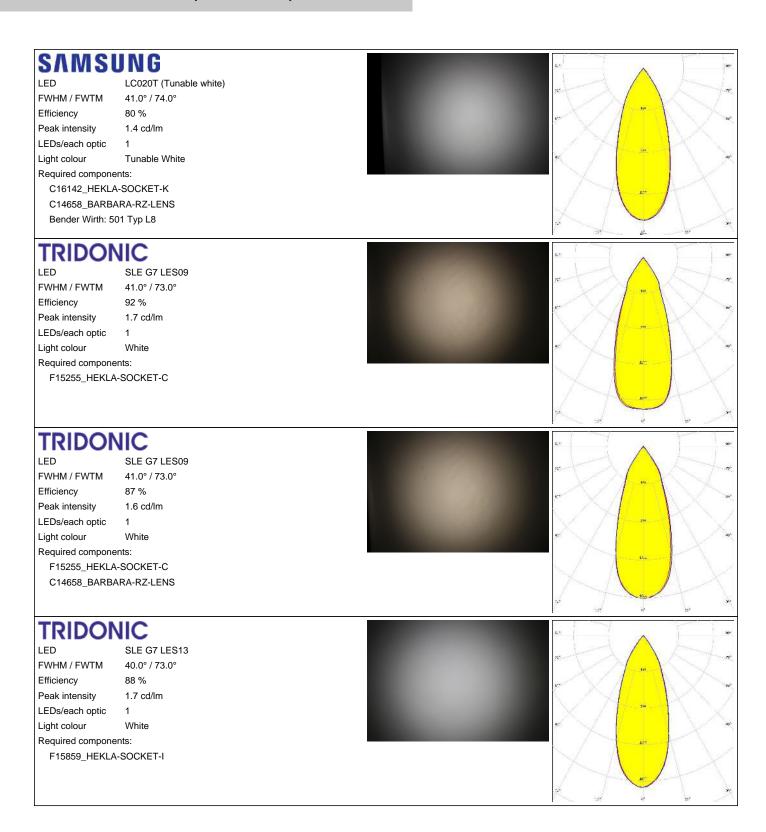


17/20



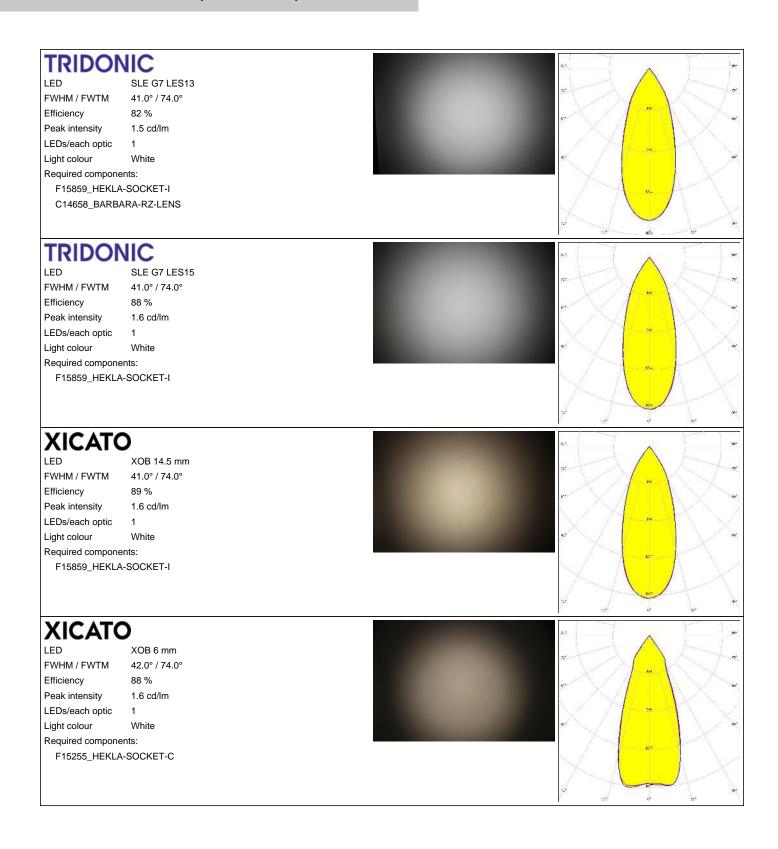



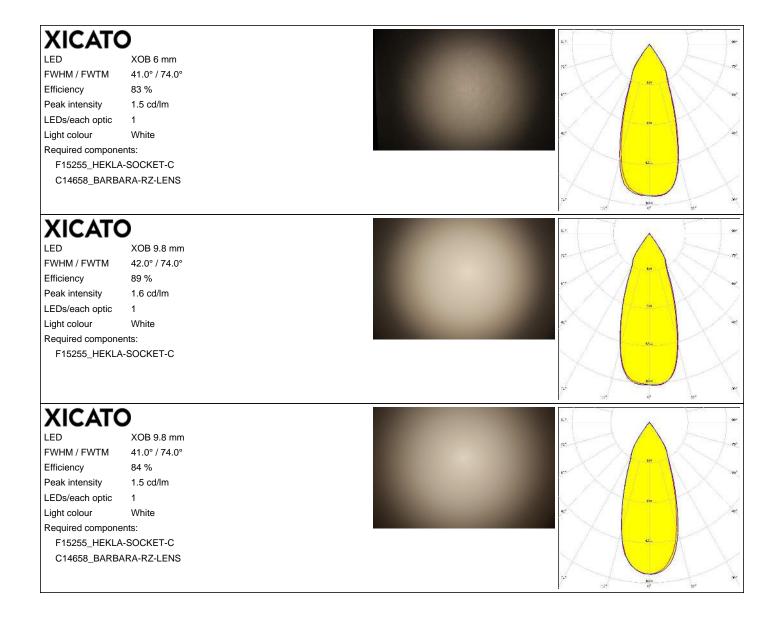



OPTICAL RESULTS (SIMULATED):

bridgelux


LED V13 Gen 8

FWHM / FWTM 40.0° / 74.0° Efficiency 89 %

Peak intensity 1.7 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I



bridgelux.


LED Vesta DTW 15mm (33W)

FWHM / FWTM 40.0° / 72.0° Efficiency 88 %

Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8



WNICHIA


LED COB L-Type (LES 11)

FWHM / FWTM 42.0° / 75.0° Efficiency 90 %

Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




WNICHIA

LED COB L-Type (LES 9)

FWHM / FWTM 43.0° / 74.0° Efficiency 90 % Peak intensity 1.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H





PRODUCT DATASHEET F16365_BARBARA-G2-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

20/20

www.ledil.com/ where_to_buy