

6

5

4





3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

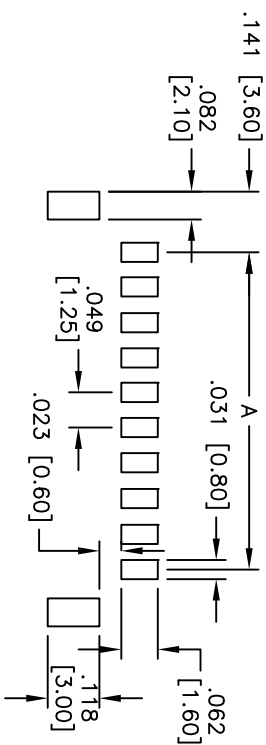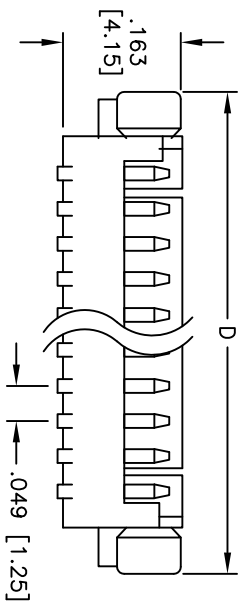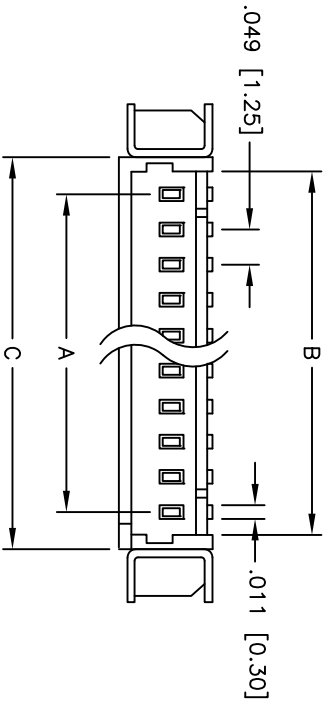

RECOMMENDED
PCB LAYOUT
PCB THICKNESS .031 [0.8mm]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

- A=.049 [1.25] X No. of Spaces
- B=.049 [1.25] X No. of Spaces + .070 [1.80]
- C=.049 [1.25] X No. of Spaces + .118 [3.00]
- D=.049 [1.25] X No. of Spaces + .251 [6.40]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	BW	01/17/07
-------	----	----------

CHECKED		
---------	--	--

APPROVED		
----------	--	--

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER SMT RIGHT ANGLE

SIZE	PART NO.	REV.
X	125SH+A-XX-TR-SMT	A
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1