
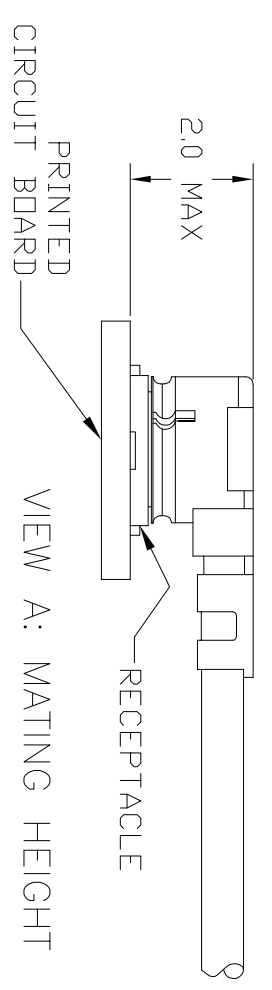


Loc	HT	DIST	OO	P	LTR	0	REVISIONS	DATE	DWN	APVD
							DESCRIPTION	29APR05	HXF	DF

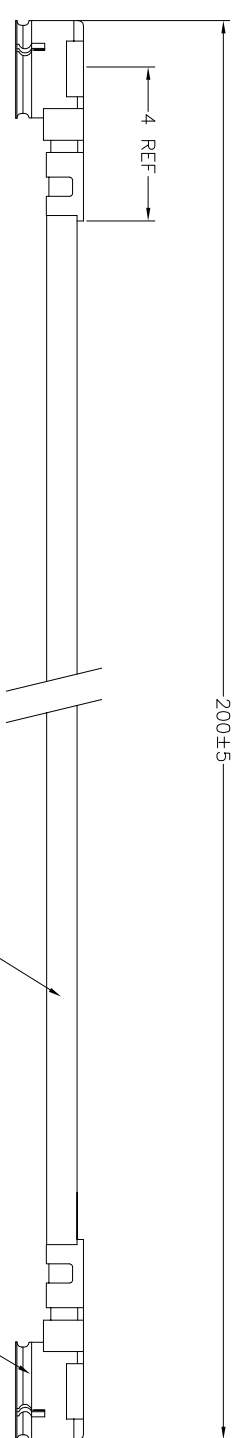

- NOTES:
- HIROSE COMPATIBLE, 2.0MM MATING HEIGHT.
  - 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms  
FREQUENCY RANGE: DC TO 6 GHz  
VSWR 1.4:1 MAX
  - PRODUCT RATINGS:  
TEMPERATURE: -40 TO +90 DEG.C  
VOLTAGE: 60 VAC  
CHARACTERISTIC IMPEDANCE: 50 OHMS  
MATING DURABILITY: 30 CYCLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLG ±	1 PLG ±	2 PLG ±	3 PLG ±	4 PLG ±	ANGLES ±	FINISH -
-------------	----	--	---------	---------	---------	---------	---------	----------	----------

APVD	Hao Xiangfeng	29APR05	AR	MM	MINIATURE COAXIAL CABLE, 0.80mm OD	2
CHK	Fouli Zhou	29APR05	2	PC	UMCC TYPE II PLUG	1
APVD	DENVER WILLSON	27MAR05	QTY	UNIT	DESCRIPTION	ITEM

DMN	Hao Xiangfeng	29APR05	SIZE	A4	CAGE CODE	00779	DRAWING NO	1750108-2	RESTRICTED TO
CHK	Fouli Zhou	29APR05	APPLIC	PRODUCT SPEC	APPLICATION SPEC	WEIGHT			
APVD	DENVER WILLSON	27MAR05	SCALE	1:1	SHEET	1	OF	1	REV
DMN	Tyco Electronics Corporation	29APR05	NAME	CABLE ASSY, UMCC TYPE II PLUGS					
CHK	KunShan, CHINA 215321	29APR05							