

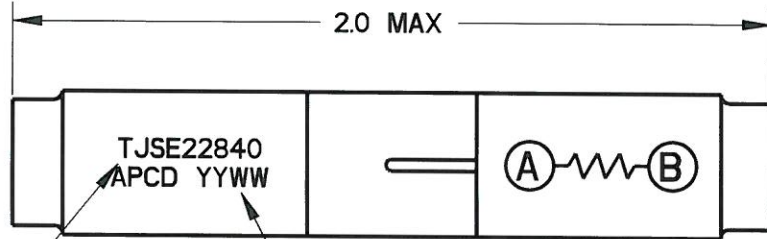


REV	ECN	APP'D
-	6582	JT 9/12/10



WHITE MARKING
.06 HT

DATE CODE

HOLES SEALED
WITH RTV
BOTH ENDS

NOTES:

1. MATERIALS:

HOUSING: POLYETHERIMIDE, COLOR BLACK
GROMMET: SILICONE ELASTOMER, COLOR BLUE
INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,
PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I
50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,
CLASS 1, 50/30 MICROINCH MIN.
CONTACT RETAINER: STAINLESS STEEL

2. SPLICE ACCEPTS (2) MATING M39029/1-100 CONTACTS
(INCLUDED)

3. PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS81714.

4. RESISTOR: 3.24KΩ, 1/4W, ±1%, RLR07C3241FS

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE WIRE SPLICE, ELECTRONIC 3.24KΩ, 1/4W, 1% SIZE 22		
			ENGR M. DiGIACOMO 08/12/09	SIZE A		DWG NO. TJSE22840_C	REV -
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		CHKD Brid Neman 9/10/10	APPD Jack R 9/10/10	CODE: 58982	SCALE: 2:1	SHEET 1 OF 1