

PMU FOR PROCESSOR POWER

Check for Samples: [TPS65913](#), [TPS65914](#)

FEATURES

- Seven step-down switched-mode power supply (SMPS) regulators:
 - Two 0.5 to 1.65 V (10-mV steps) up to 8A
 - SMPS12 and SMPS45, dual-phase configuration with dynamic voltage scaling (DVS) control
 - WCSP package 8 A peak
 - QFN package 6 A
 - One 0.5 to 3.3 V (10-mV or 20-mV steps) up to 4 A
 - SMPS3, single-phase configuration
 - WCSP package 4 A peak
 - QFN package 3 A
 - Can be combined with SMPS12 as a 12 A (peak) triple-phase regulator
 - Two 0.5 to 3.3 V (10-mV or 20-mV steps) up to 4 A
 - SMPS6 and SMPS7, single-phase configuration
 - SMPS6 with DVS
 - WCSP package 4 A peak
 - QFN package 3 A
 - SMPS7 can be combined with SMPS45 as a triple-phase regulator
 - Two 0.5 to 3.3 V (10-mV or 20-mV steps) 1 A
 - SMPS8 and SMPS9, single-phase configuration
 - SMPS8 with DVS
 - Output current measurement in all except 1-A SMPS regulators
 - Differential remote sensing (output and ground) in dual-phase and triple-phase regulators
 - Automatic pulse frequency modulation (PFM) at light load current
 - Software-controlled ECO mode up to 5 mA with 15- μ A quiescent current
 - 25- μ A quiescent current in auto-mode (PFM and pulse width modulation [PWM])
 - 100% duty cycle for lowest dropout
- Short-circuit protection
- Powergood indication (under voltage and overcurrent indication)
- Internal soft-start for in-rush current limitation
- One 5 V dual-output step-up converter for USB OTG, USB LDO, HDMI or D-class:
 - 0.5 A for USB OTG (OUT1) + 0.1 A (OUT2) for USB LDO, HDMI
 - OUT2 up to 1A (when OUT1 not active)
 - 3.6-V voltage selection for USB LDO to minimize power dissipation
 - Bypass mode to supply USB LDO from system supply
- Eleven general-purpose LDOs (50-mV steps):
 - Two 0.9 to 3.3 V @ 300 mA with battery or preregulated supply
 - Six 0.9 to 3.3 V @ 200 mA with battery or preregulated supply
 - One can be used as a vibrator driver.
 - One 0.9 to 3.3 V @ 50 mA with battery or preregulated supply
 - Bypass mode for SD[®] card I/O supply
 - One 100 mA USB LDO
 - One low-noise LDO 0.9 to 3.3 V @ up to 100 mA (low noise performance up to 50 mA)
 - Two additional LDOs for PMU internal use
 - Short-circuit protection
- Low power consumption
 - 5 μ A in backup mode
 - 20 μ A in off mode
 - 90 μ A in sleep mode with two SMPSs active
- Clock management 32-kHz crystal oscillator or RC oscillator:
 - Three buffered 32-kHz outputs
- Real-time clock (RTC) with alarm wake-up mechanism
- USB OTG support
 - USB ID detection
 - Accessory Charger Adapter (ACA) detection



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

I²C is a trademark of Phillips Semiconductor Corp.
SD is a registered trademark of Toshiba.

- Attach Detection Protocol (ADP)
- SD card detection capability
- Backup battery charger
- 12-bit sigma-delta general-purpose analog-to-digital converter (GPADC) with 16 input channels (6 external and 10 internal)
- Thermal monitoring:
 - High temperature warning
 - Thermal shutdown
- Control:
 - Configurable power-up and power-down sequences (one-time programmable [OTP])
 - Configurable sequences between the SLEEP and ACTIVE states (OTP)
 - Two dedicated digital output signals (REGEN) that can be included in the sequences
 - Three digital output signals muxed with GPIO that can be included in the sequences
 - LED drivers: two 10-mA current sinks muxed with GPIO
 - Selectable I²C™ control interface:
 - One serial peripheral interface (SPI) for resource configurations and DVS control
- Two I²C™ interfaces for resource configuration and DVS control
 - The I²C interfaces can be combined.
- Undervoltage lockout and battery fault comparator
- Long button-press detection
- Battery or system voltage range from 2.5 to 5.5 V
- Package options:
 - 5.80 × 5.86-mm 13 × 13 169-pin WCSP with 0.4-mm ball pitch
 - 9.15 × 9.15-mm 108-pin QFN with 0.5 or 0.55-mm pitch

APPLICATIONS

- Mobile phones and smart phones
- Tablets
- Gaming handsets
- Portable media players
- Portable navigation systems
- Hand-held devices

DESCRIPTION

The TPS65913 and TPS65914 are integrated PMICs for applications powered by a rechargeable battery. The devices include seven configurable step-down converters for memory, processor core, I/O, or preregulation of LDOs. Two of these configurable step-down converters can be combined with another regulator for triple-phase operation and increased output current. A 5 V dual-output step-up converter is available to supply USB OTG and USB LDO, HDMI or D-class, for example. The devices also contain 11 LDO regulators for external use. LDOs can be supplied from either a battery, the system supply, or a preregulated supply. An integrated general-purpose sigma-delta analog-to-digital converter (ADC) supports measurement of 6 external inputs and 10 internal signals.

An OTP configurable controller enables customized power-up and power-down sequences. The TPS65913 and TPS65914 devices include a 32-kHz oscillator to sequence all resources during power up and power down. Two dedicated pins in the wafer chip scale package (WCSP) and one dedicated pin in the quad-flat no-leads (QFN) can be configured as part of the power-up sequence to control external resources. All LDO and SMPS regulators can be controlled by the SPI or I²C interface, or by dedicated power request signals. In addition, voltage scaling registers allow transitioning the SMPS to different voltages by SPI, I²C, or roof and floor control. General-purpose input/output (GPIO) functionality is available and three GPIOs can be configured as part of the power-up sequence to control external resources. Power request signals enable power mode control for power optimization.

The TPS65913 device is available in a 13-ball × 13-ball WCSP package with a 0.4-mm pitch; TPS65914 device in a dual row QFN package with a 0.5 / 0.55-mm pitch.

Because of the limited number of balls, some of the features are not available in the QFN package.

For the complete TPS65913/14 data sheet, please contact your TI sales representative. The document is internally available for download on ESP under the corresponding product folders and can be shared with customers.

DEVICE INFORMATION

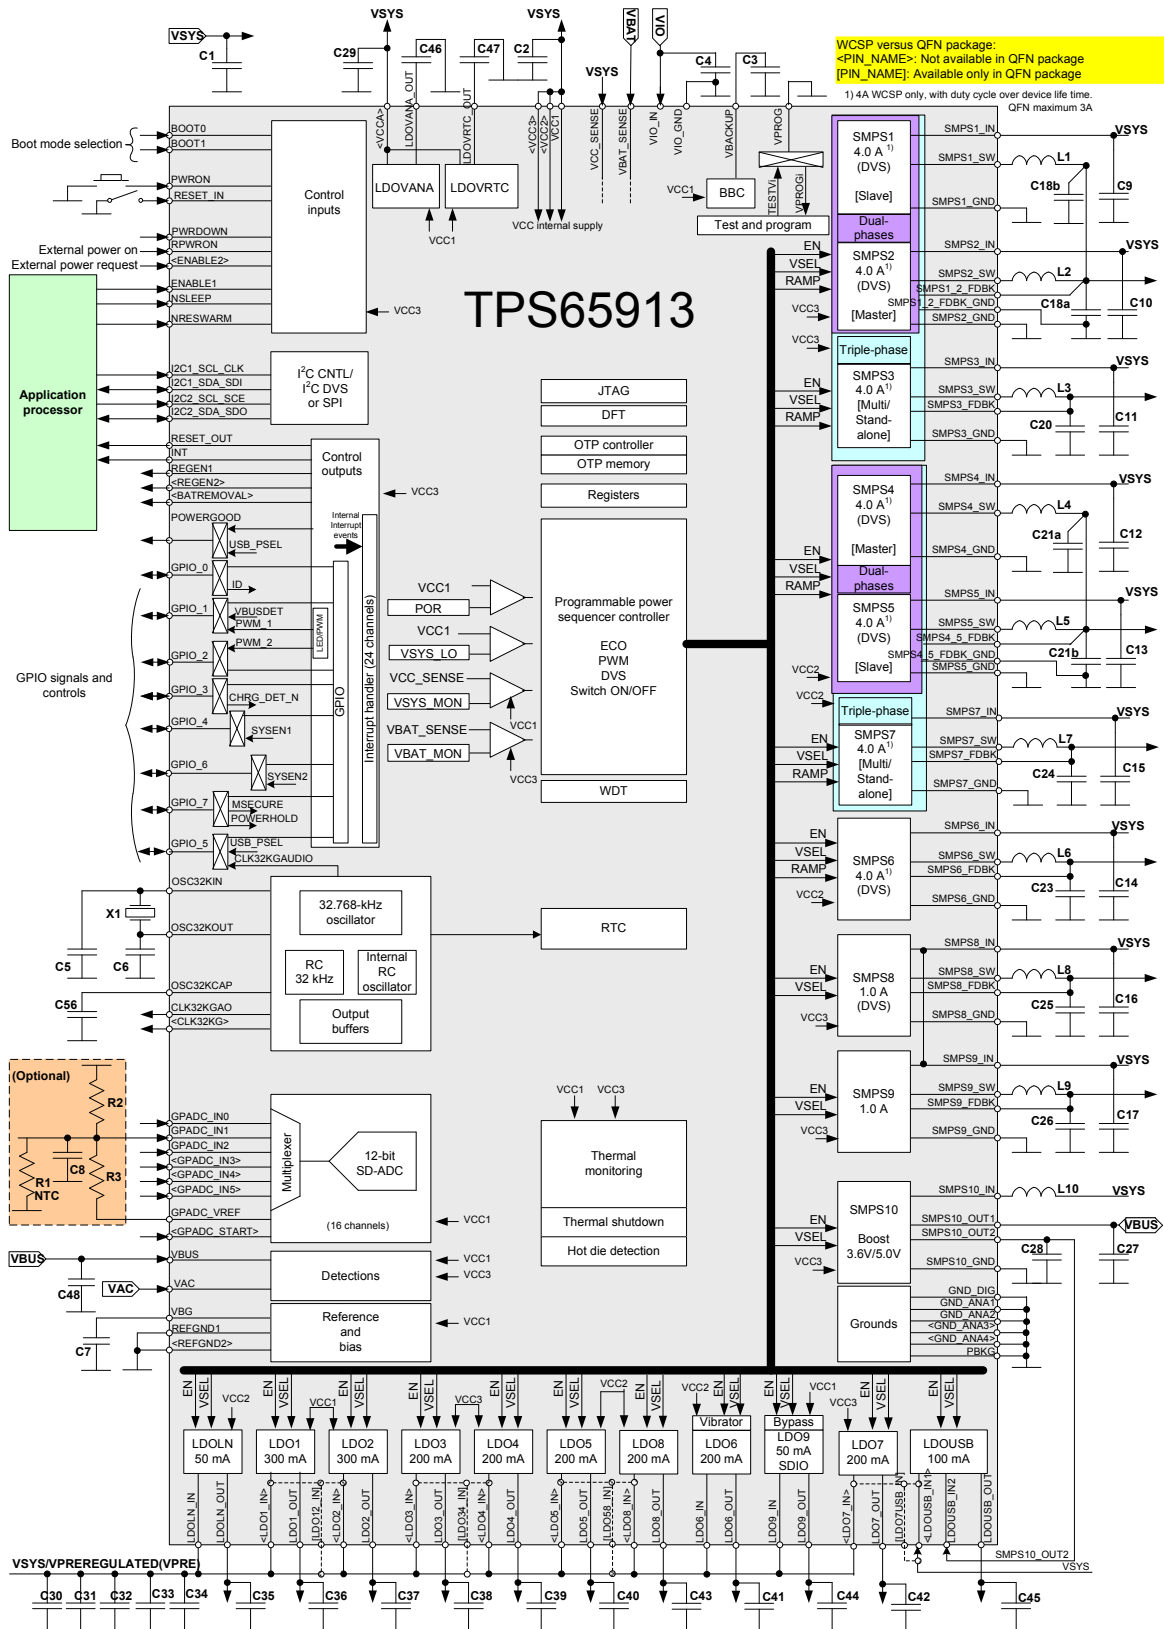


Figure 1. Functional Block Diagram

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TPS65913B2B5YFFR	PREVIEW	DSBGA	YFF	169	3000	Green (RoHS & no Sb/Br)	Call TI	Level-1-260C-UNLIM	-40 to 85	T65913B2B5 ES2.2	
TPS65913B2B5YFFT	PREVIEW	DSBGA	YFF	169	250	Green (RoHS & no Sb/Br)	Call TI	Level-1-260C-UNLIM	-40 to 85	T65913B2B5 ES2.2	
TPS65913B2B6YFFR	PREVIEW	DSBGA	YFF	169	3000	TBD	Call TI	Call TI	-40 to 85		
TPS65913B2B6YFFT	PREVIEW	DSBGA	YFF	169	250	TBD	Call TI	Call TI	-40 to 85		
TPS65913B2B8YFFR	PREVIEW	DSBGA	YFF	169	3000	Green (RoHS & no Sb/Br)	Call TI	Level-1-260C-UNLIM	-40 to 85	T65913B2B8 ES2.2	
TPS65913B2B8YFFT	PREVIEW	DSBGA	YFF	169	250	Green (RoHS & no Sb/Br)	Call TI	Level-1-260C-UNLIM	-40 to 85	T65913B2B8 ES2.2	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com