SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS

UL RECOGNIZEO: UL 1283 CSA CERTIFIED: CSA 22.2, # 0,0.4,8 VDE APPROVEO: EN 133 200

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREQUENCY:

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

19.2µA @ 120V 60Hz 33.2 µA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, In. IS AS FOLLOWS: Io=Ir -

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES I, FOR 8 SECONDS

CUSTOMER DRAWING CATALOG #15SRBS8-S

ECN # LAPPRVD. | DATE PJD 07-026555 08NDV07

TEST SPECIFICATIONS:

INDUCTANCE: N/A mH

CAPACITANCE: (MEASURED @ | KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: LINE TO LINE: 220pF ± 20% N/A

DISCHARGE RESISTOR: N/A LZG AND LZL T.R.

NO DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDE,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VOC FOR I MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

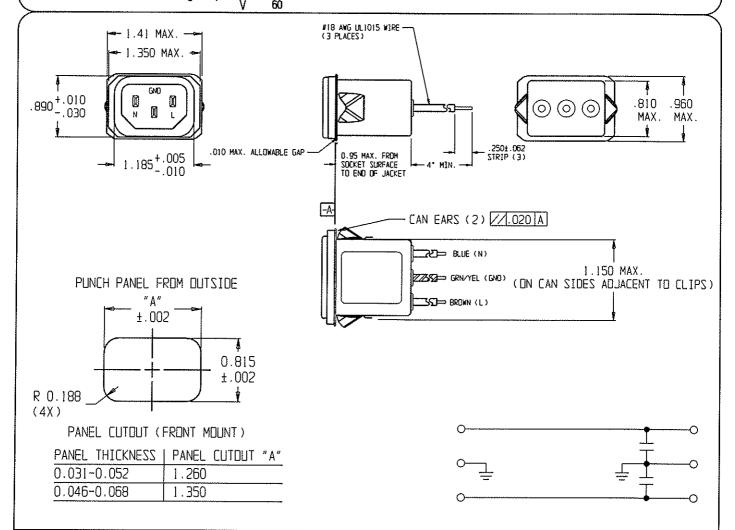

50a-50a(MINIMUM) INSERTION LOSS							THIRD ANGLE	5
FREQUENCY MH2	1.0	5.0	10	50	100	300	UNLESS DTHERWISE SPECIFIED,	Tyco Electronics CORCOM PRODUCTS. 620 S. BUTTERFIELD RO. MADELEIN IL 50060
CDMMDN dB	/	/	1	6	17	19	TOLERANCE TO BE ± .025 MATERIAL & FINISH: AS SUPPLIED THIS DECONTROL OF PROPRIETARY TO	POWER LINE FILTER
DIFF. dB	/	/	/	/	/	,	IVED ELECTRONICS CREATEDING AND ITS MORNOVICE SUBSIDIARIES. AND AFFELTRISES, IT MAY NOT SE DISCIDERS OT DA MYDRE OTHER THAN TYED ELECTRONICS PROCNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CREATERION. HARRISONGS, PERMOTEVANIA USA	SCALE: .75: DATE: TOMARO6 CAVALUG NO. REV. ORW. 8Y: SD DRTG: PJO 15SRBS8-S 1