

REV. B
 DCO 300825

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C	
RESISTANCE	400 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION	70 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES: OPERATE, RELEASE 6 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX.
 CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

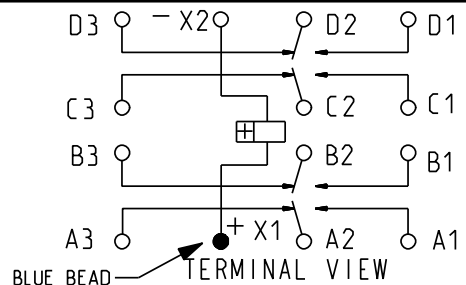

CONTACT RATING: LOW LEVEL
 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
 100,000 OPERATIONS

DR. B.D. 25APR2008 CK. 5/9/08 J.M.B.

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/5-017M
 CUST. NO. ---- REV. ---

TE NUMBER
 6-1617760-3

CII PART NUMBER
 FCB-405-0517M