

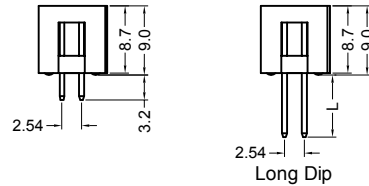
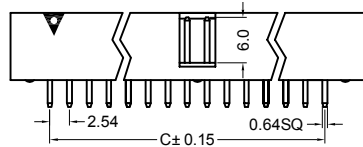

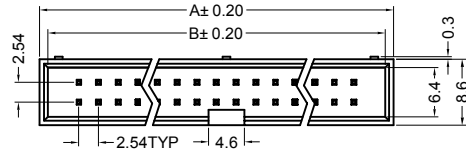




**Straight Type**



**Right Angle Type**

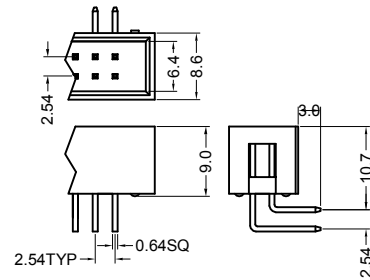

**Surface Mount Type**



**材质 Material:**

绝缘体 Insulator: Glass filled PBT UL94V-0  
 接触件 Contacts: Brass  
 电镀层 Plating: Whole Gold plated over Nickel

**电气性能 Electrical Characteristics:**

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA  
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC  
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute  
 工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40°C~+105°C

**Dimension**

position	A	B	C
06	15.24	13.04	5.08
08	17.78	15.58	7.62
10	20.32	18.12	10.16
14	25.40	23.20	15.24
16	27.94	25.74	17.78
20	33.02	30.82	22.86
24	38.10	35.90	27.94

position	A	B	C
26	40.64	38.44	30.48
30	45.72	43.52	35.56
34	50.80	48.60	40.64
40	58.42	56.22	48.26
50	71.12	68.92	60.96
60	83.82	81.62	73.66
64	88.90	86.70	78.74

TITLE		BOX HEADER 2.54mm (0.100")		GENERAL TOLERANCE		DRAWN BY		DATE		<b>DENK</b> DENG KE CONNECTOR ELECTRONICS CO., LTD 登科電子有限公司	
DC3		SERIES		DK301-XX-X-X-X		CHECKED BY		DATE			
CUSTOMER P/N		UNITS		mm		APPROVED BY		DATE			
SCALE	DESCRIPTION	CHK	DATE	SCALE	1:1	PROJECTION		DRAWING NO.		SHEET 1 OF 1	
								SHEET SIZE		A4	
								REV.		A0	