

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: FT2

Conductor

Conductor count: 6
 Gauge: 20 AWG 0.52 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 26$
 Resistance at 20 °C: 36.7 Ω /km max

Insulator

Material: mPPE
 Color: red, black, white, yellow, blue, green
 Diameter: $\varnothing 1.5 \pm 0.10$ mm
 Average thickness: 0.26 mm
 Minimum thickness: 0.21 mm
 Resistance at 20 °C: 100 M Ω /km min

Shield

Type: foil
 Material: aluminum mylar
 Coverage: 100%

Filler

Material: cotton rope



Outer jacket

Material: mPPE, 85A
 Color: black
 Diameter: $\varnothing 6.2 \pm 0.25$ mm
 Average thickness: 0.8 mm
 Minimum thickness: 0.56 mm

Wire marking: E339579 UL AWM STYLE 21509 20 AWG 105°C
 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

Bend radius

Minimum: 6 times diameter (37.2 mm)

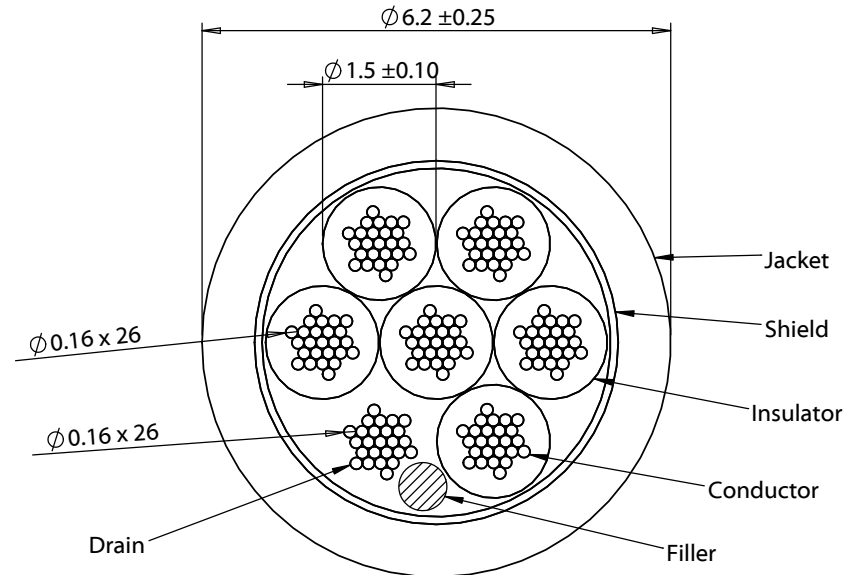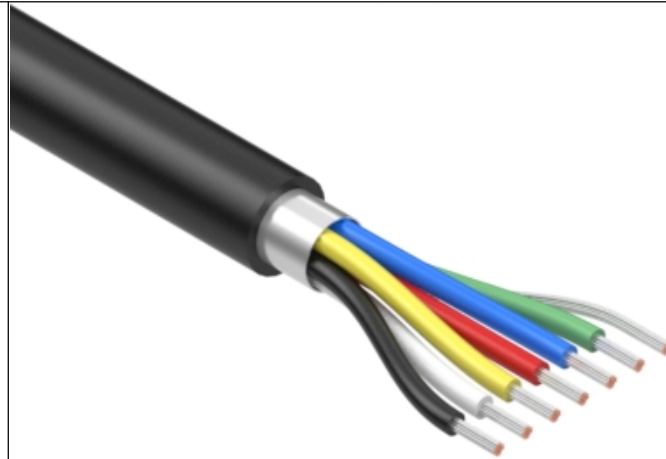

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY
A	4/20/2020	Initial release	AW <small>Digitally signed by AW Date: 2020.04.21 13:58:07 -07'00'</small>		
			Verified:	Phthalate and halogen free	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters. Tolerances:	Description:	Size: Part number:
			X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Wire, 6C TS, 20 AWG, 21509, 600V, 105C, 6.2 mm, shielded, FT2, mPPE	A 30-01468
					Scale: 10:1 Sheet 1 of 1

5

4

3

2

1