

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

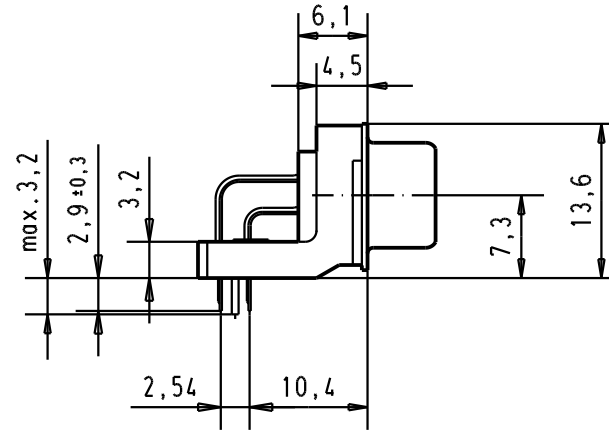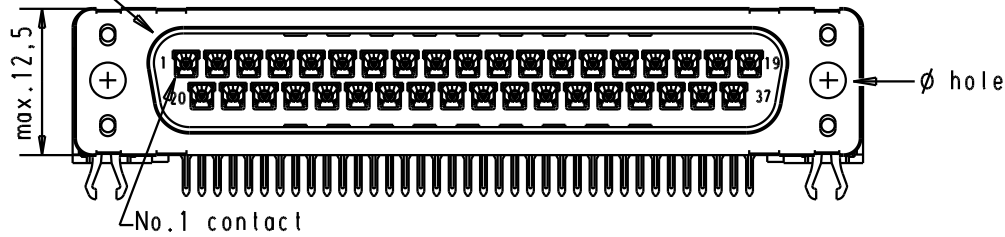

PCB layout hole component side

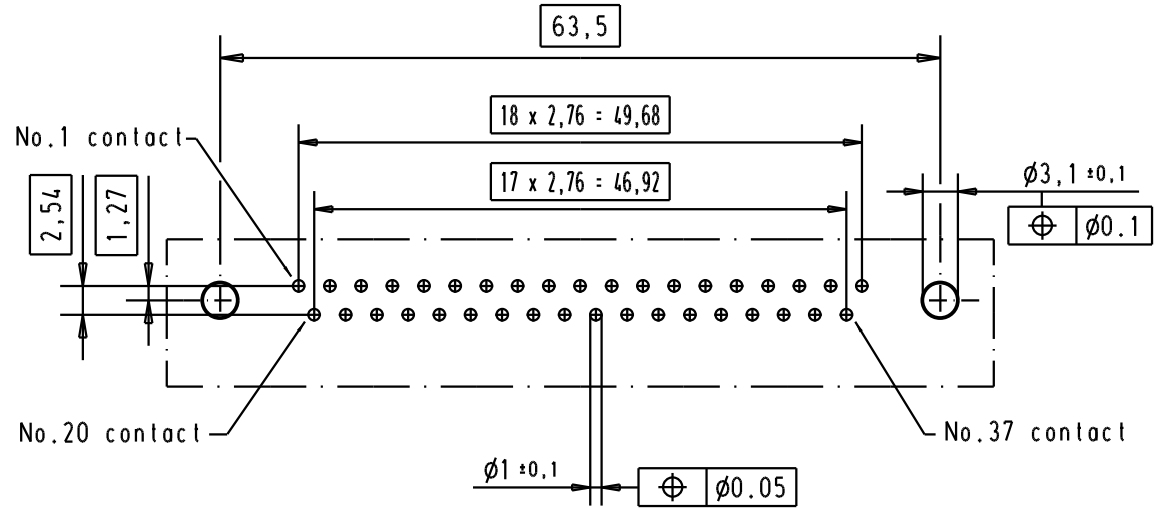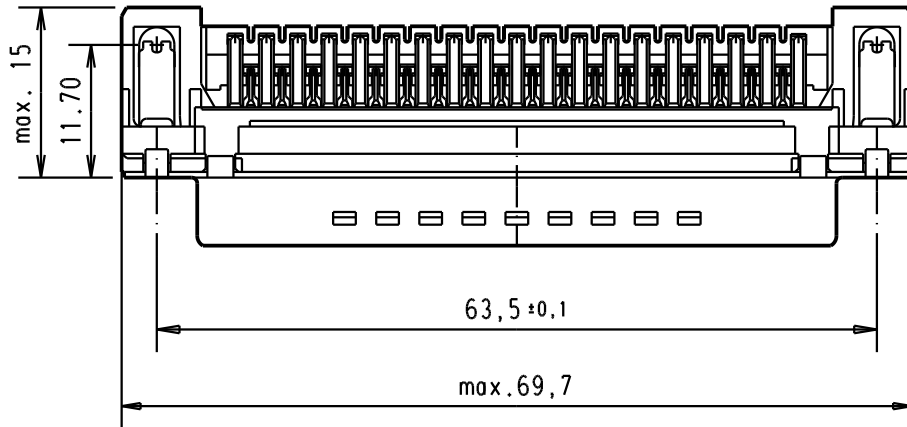

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

						Det.	Name	<p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, male, standard angle, 37 poles, with solder pin, hole and grounding board lock.	Moßstab/ Scale	
						Detail.	15/dec/00			ALSPACE	1.5:1
						Insp.					
09 65 462 3810	3.1 ± 0.1	1	31084	22/04/04	JH	Stand.			Blatt/ Page 4		
09 65 462 6810	3.1 ± 0.1	2	29689	03/07/01	AA	HARTING EURL F-95972 Paris					
09 65 462 7810	3.1 ± 0.1	3	27960	15/dec/00	ALSPACE						
Part number	∅ hole	Performance level	Mod.	Dat.	Name	TB 0965462x81x Sub.					