

1-2312547-1 ✓ ACTIVE



## M12 Rail PG Clamp

TE Internal #: 1-2312547-1

Standard Circular Connectors, Cable-to-Cable, 8 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Nickel, Brass, M12 Rail PG Clamp

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors > M12 Straight D4 PG Clamp



Connector System: **Cable-to-Cable**

Number of Positions: **8**

Sealable: **Yes**

Connector & Contact Terminates To: **Wire & Cable**

Contact Current Rating (Max): **2 A**

[All M12 Straight D4 PG Clamp \(12\)](#)

## Features

### Product Type Features

Prewired	No
Product Type	Connector Kit
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Full Metal Shell

### Configuration Features

Keying	A
Number of Positions	8
Contacts Preloaded	No

### Electrical Characteristics



Operating Voltage	30 VAC
-------------------	--------

### Signal Characteristics

Data Rate	1 Gb/s
-----------	--------

### Body Features

Environmental Protection	Yes
--------------------------	-----

Weight	25 g[.0552 lb]
--------	----------------

Environmental Protection Type	Elastomer Sealed
-------------------------------	------------------

Shell Plating Material	Nickel
------------------------	--------

Shell Base Material	Brass
---------------------	-------

Circular Connector Insulation Material Type	Low Fire Hazard Thermoplastic
---	-------------------------------

Hermetically Sealed	Yes
---------------------	-----

### Contact Features

Contact Quantity (Size 8 Databus)	8
-----------------------------------	---

Contact Current Rating (Max)	2 A
------------------------------	-----

Circular Connector Contact Type	Pin
---------------------------------	-----

### Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Polarization Code	A
-------------------	---

Mating Alignment Type	Keyed
-----------------------	-------

Mating Retention	With
------------------	------

### Dimensions

Compatible Insulation Diameter Range	4 – 6.5 mm
--------------------------------------	------------

### Usage Conditions

IP Dust Sealing Level	6
-----------------------	---

IP Water Sealing Level	IP67
------------------------	------

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

### Operation/Application

Durability Rating	250 Cycles
-------------------	------------

Circuit Application	Signal
---------------------	--------

Shielded	Yes
----------	-----

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------



## Packaging Features

Packaging Quantity	1
--------------------	---

## Other

Field Serviceable	Yes
-------------------	-----

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # CAT-M1-P489D  
M12 Crimp Contact for A8 Code




TE Part # 1-2823557-1  
CRIMP TOOL FOR CRIMP FLANGE /SLEEVE



TE Part # 1-2823560-1  
ASSEMBLY TOOL HANDLE FOR CRIMP FLANGE



TE Part # 1-2823561-1  
UNIVERSAL INSERT (ALL M12 CODES)

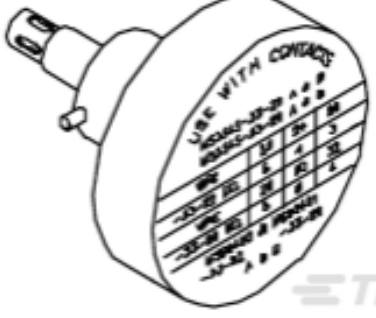

TE Part # CAT-M1-M1  
M12 Assembly Tooling



TE Part # CAT-R131-IN722  
Crimp Insert for Use with 1-2823557-1




TE Part # 601966-1  
CRIMPING TOOL M22520/2-01




TE Part # 601967-1  
CRIMPING TOOL M22520/1-01

Also in the Series | M12 Rail PG Clamp



Standard Circular Connectors(22)

Customers Also Bought

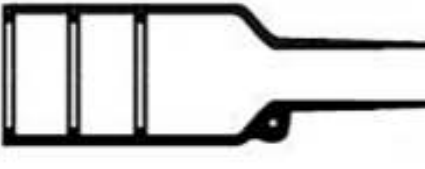

TE Part #402297-000  
Bulbous Heat Shrink Boots: Lipped, Straight



TE Part #T4162223005-007  
RPC-M12-5MR-10.0SH-M12-5FS-PUR



TE Part #T4113012081-000  
M12 M, 8P GOLD A\_CODE RA SHIELDED PG9



TE Part #T4111412051-000  
M12 M, 5P GOLD B\_CODE S SHIELDED PG9



TE Part #YDTS26F09-98SAV001  
PLUG ASSY



TE Part #YDTS26F19-35SBV001  
PLUG ASSY



TE Part #YDTS32F25NV0010000  
DUST COVER ASSEM



TE Part #2803-4-22143  
CONT SOC ASSY



## Documents

### Product Drawings

#### M12 A-CODED M-8 CABLE GLAND CONECTR MALE

English

---

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2312547-1\\_B.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2312547-1\\_B.3d\\_stp.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2312547-1\\_B.3d\\_igs.zip](#)

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

#### M12 Rail Straight Connector

English