

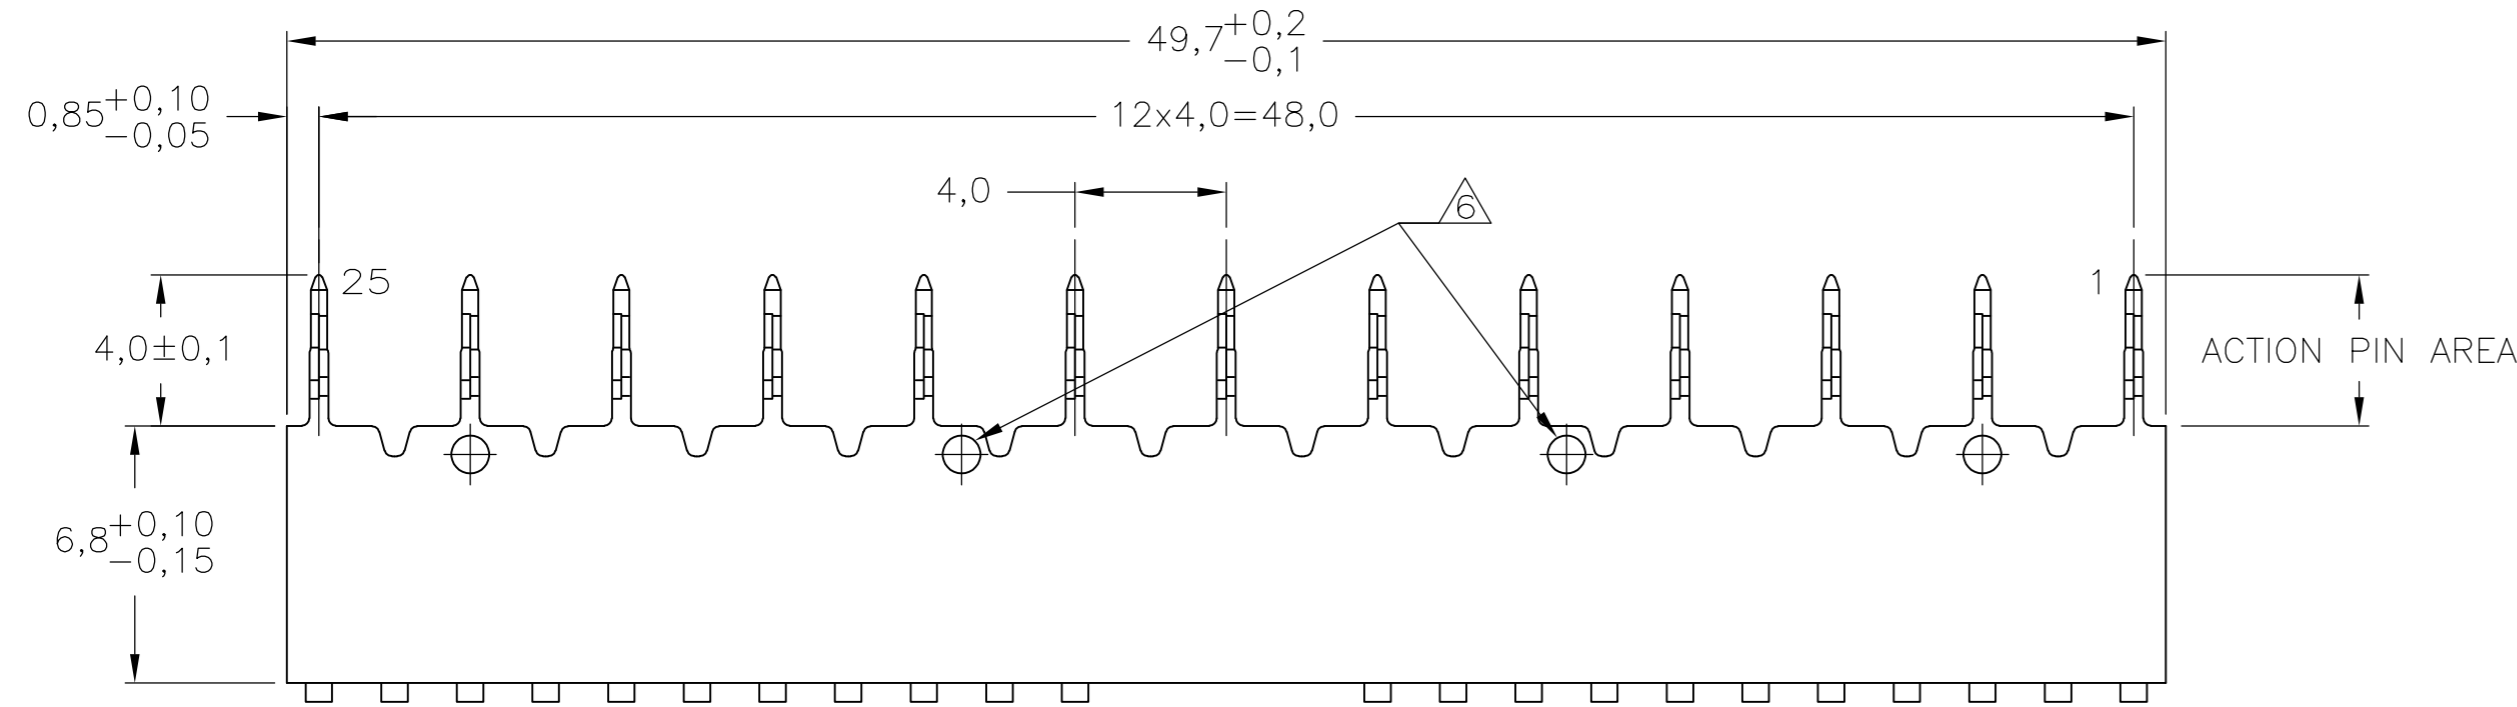


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	-	D		REVISED PER ECO-13-015151	16DEC2013	FL	FY

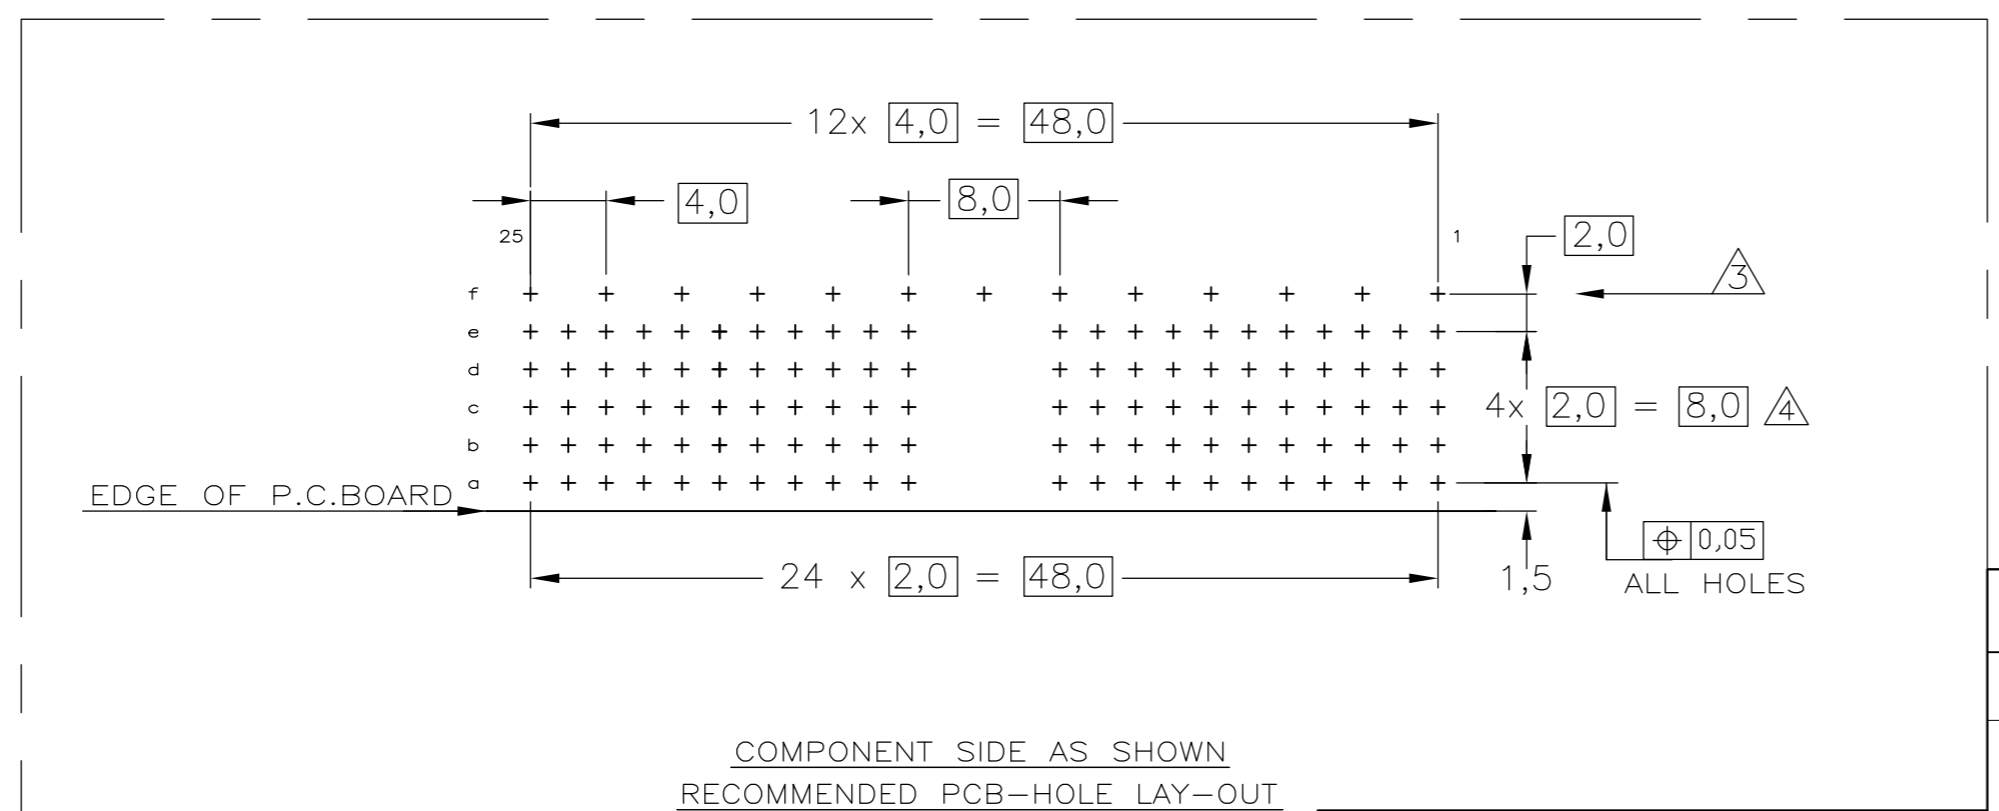

- NOTES:**
- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - ⚠ MATERIAL; PHOSPHORBRONZE.
 - ⚠ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
 - ⚠ 110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - ⚠ OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

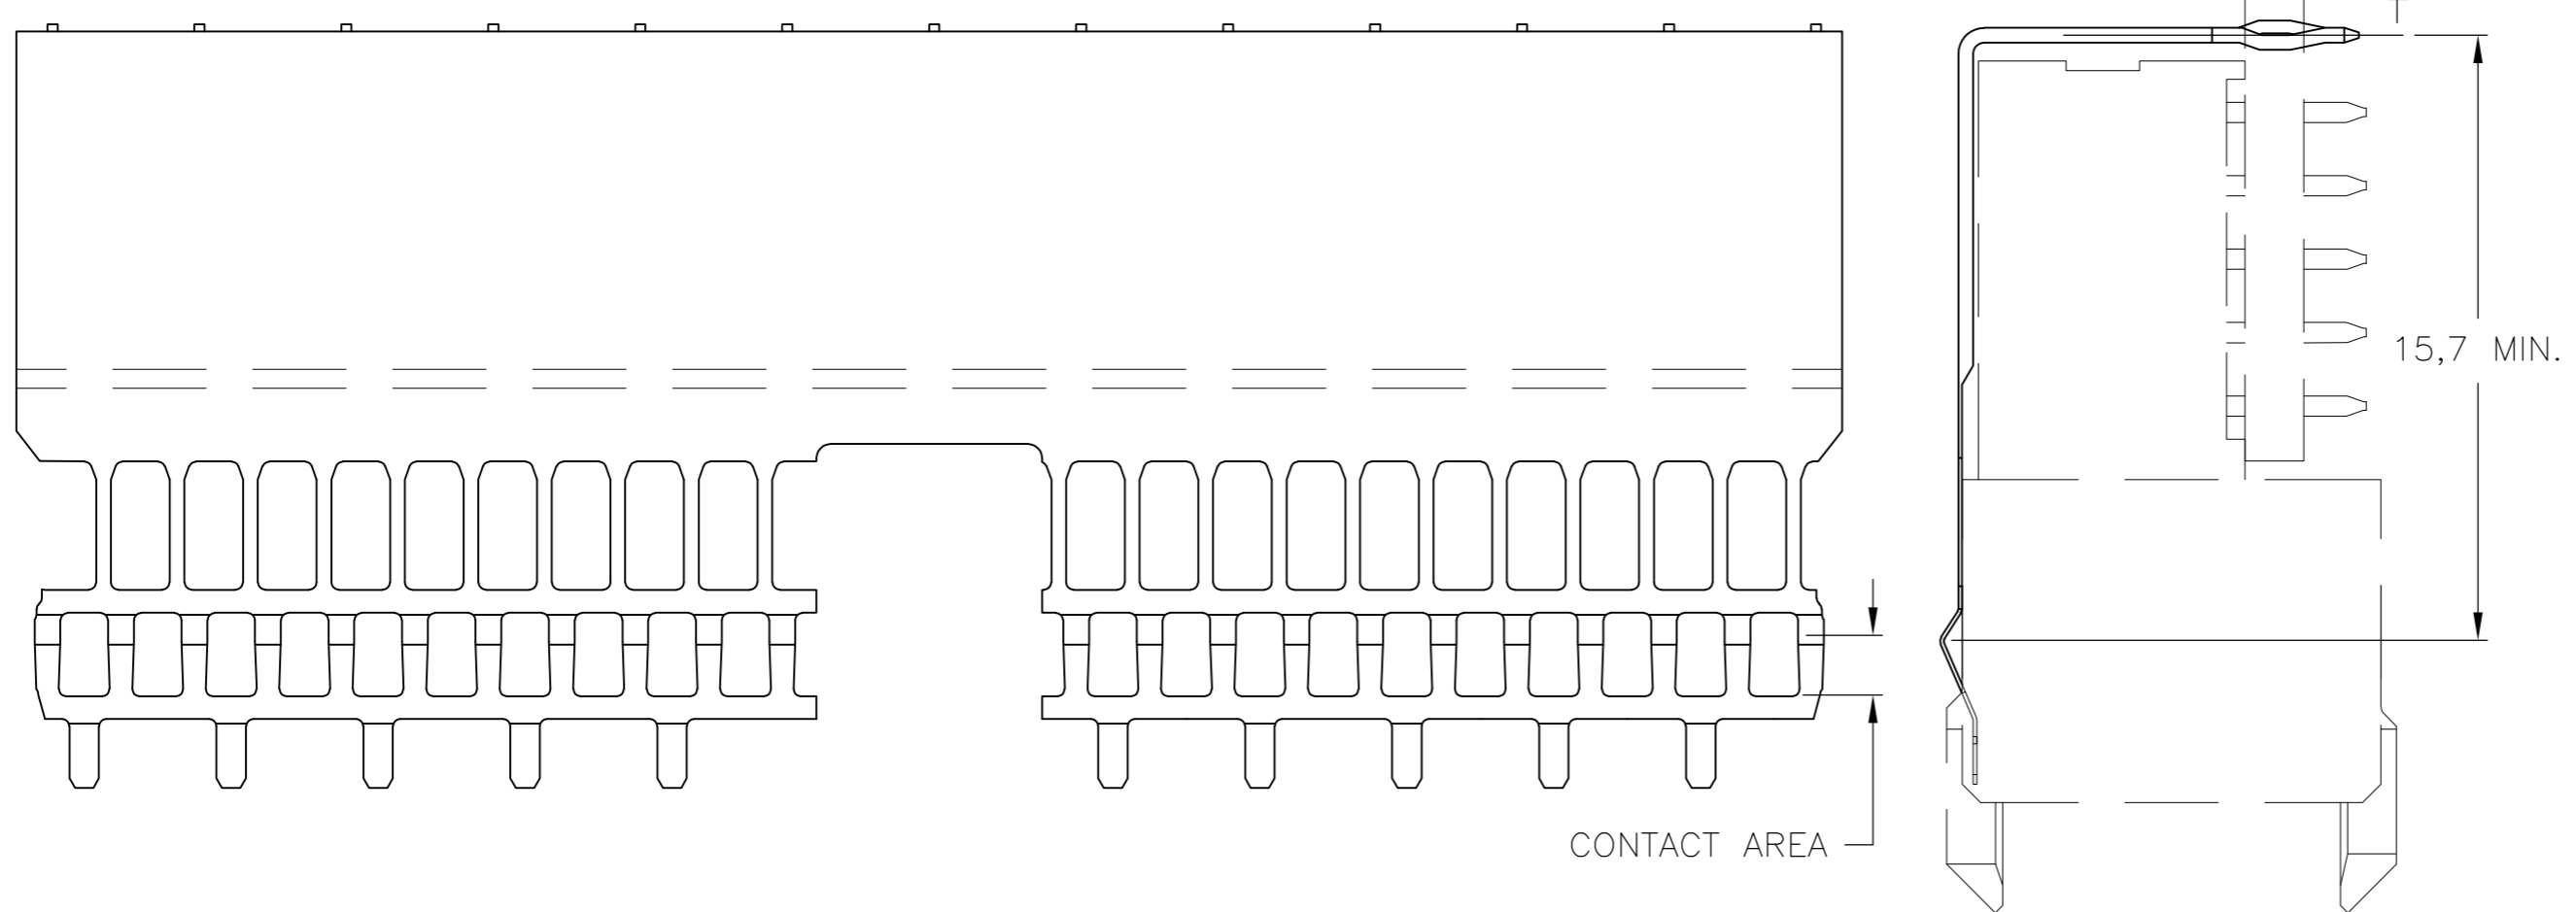

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE APPLICATION SPECIFICATION

FINISH	MATERIAL	PARTNUMBER
⚠7⚠10	⚠	8-5338107-4
⚠5⚠9	⚠	5338107-9
⚠7	⚠	5338107-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	K.N.KIRAN	13AUG04
CHK	B.MOOIJ	25MAR05
APVD	B.MOOIJ	25MAR05
PRODUCT SPEC	108-19082	
APPLICATION SPEC	114-19029	
WEIGHT	-	
CUSTOMER DRAWING		

TE TE Connectivity

Z-PACK 2mm HM
 GROUND RETURN UPPER SHIELD
 TYPE A

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=5338107	RESTRICTED TO	-
SCALE	5:1	SHEET	1 of 1	REV	D		