
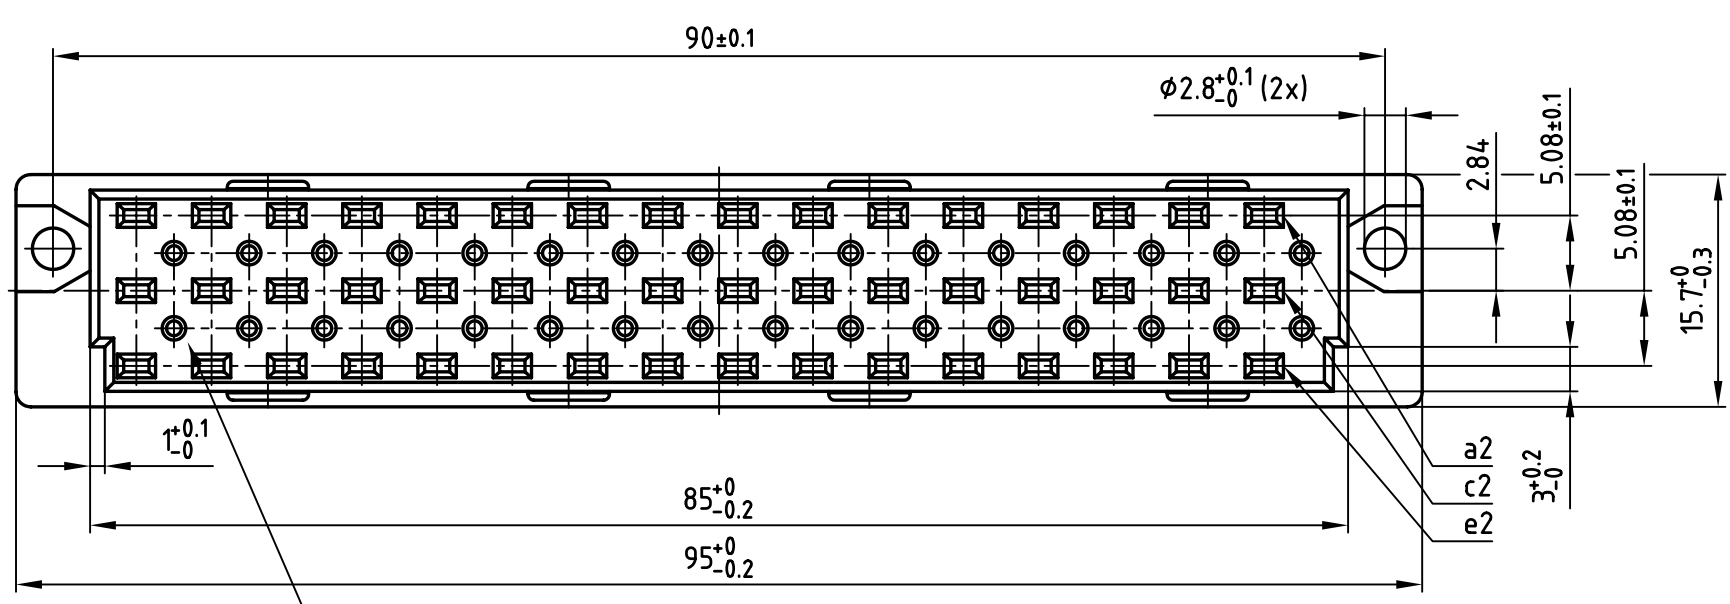


used for: DIN EN 60603-2 TYPE "E"

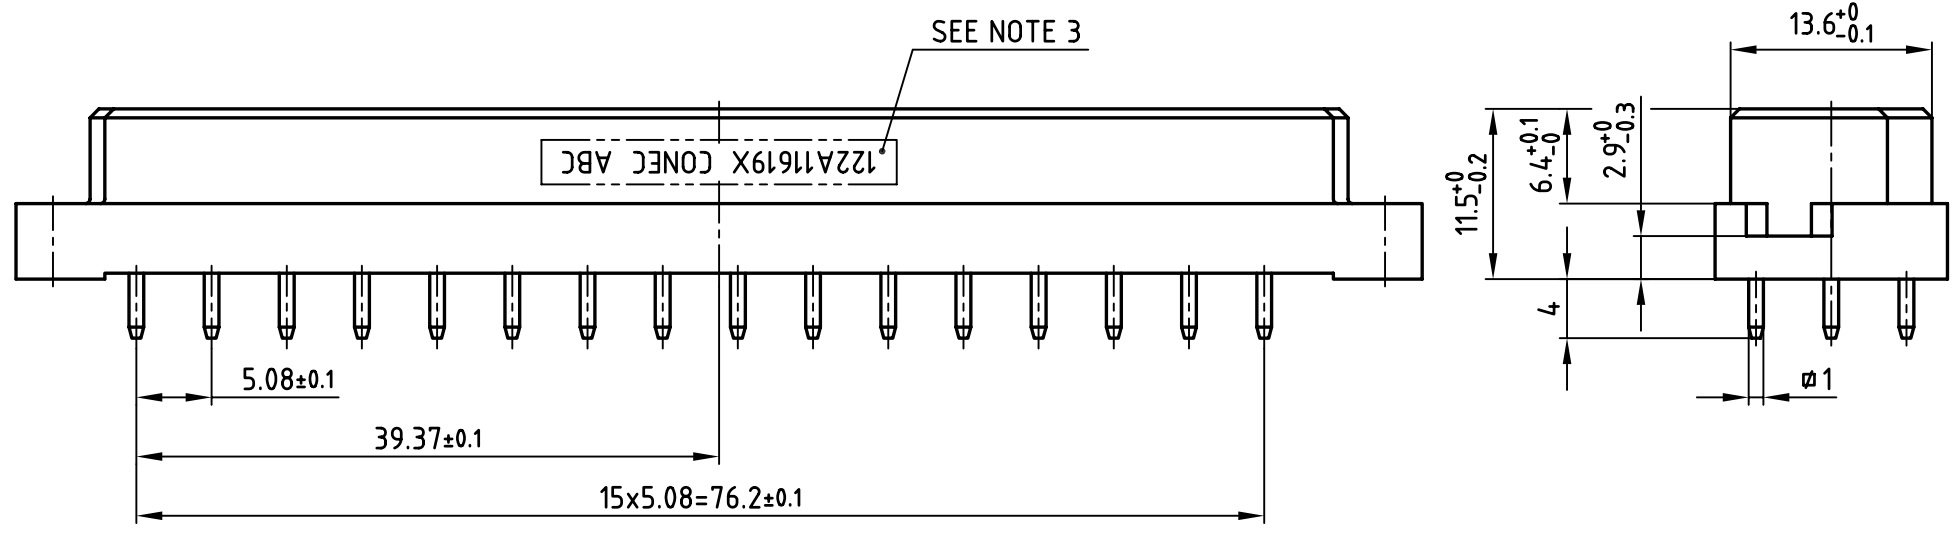


32 HOLES FOR CODE PINS  $\phi 1 \times 4.5$ mm DEEP

**NOTES:**

1. INSULATORS: PBTP UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY  
PLATING: GOLD OVER NICKEL  
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A11619X CONEC ABC



**P.C.B. HOLE DRILINGS**

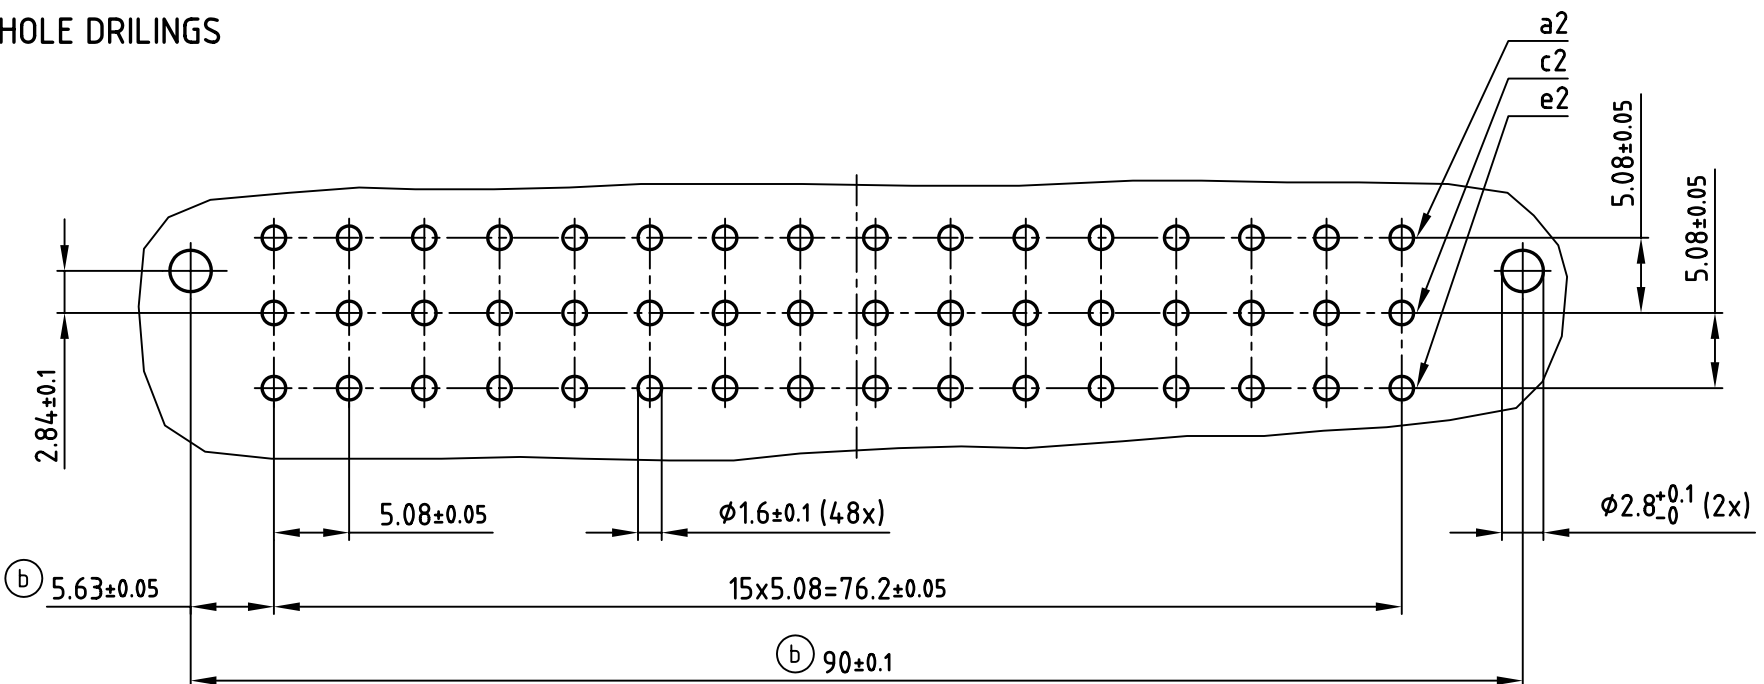

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

**CUSTOMER APPROVAL DATE:**

NAME: \_\_\_\_\_ TITLE: \_\_\_\_\_

COMPANY NAME: \_\_\_\_\_

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

**DO NOT ALTER CAD DRAWING BY HAND**

2 x b	Ä 3234	05.01.2009	Lehmen
a	Origin		
rev.	description	date	name

tolerance	dim. in mm	scale:	2:1
		material:	SEE NOTES
2007	date	name	title:
drawn	23.04.	Lehmenkühler	<b>FEMALE CONNECTOR TYPE "E"</b>
appd.	24.04.	Mickenbecker	48pos. SOLDER PIN 4,0mm
norm	DIN EN 60603-2		1x1mm
d-old			
dwg no:		AutoCAD 2006	DIN-A
part no:		12K1A464	3
			sh:1/1
part no:		122A11619X	

