


M / scale 1:1


Bestückungsplan / contact layout

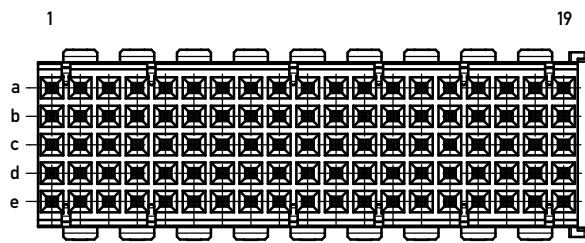

■ = bestückt / assemble

Lochbild für Leiterplatte
(Bestückungsseite)

board hole pattern
(component mounting side)

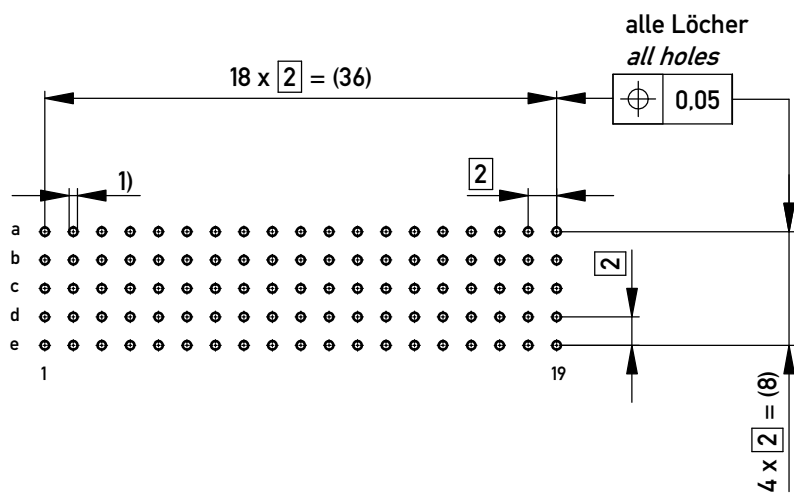

- 1) $\varnothing 0,6 \pm 0,05$ Durchmesser des metallisierten Loches
- $\varnothing 0,6 \pm 0,05$ Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.1
Metal plating of plating-through hole according to 164062 No.1

Fehlende Maße und Angaben nach IEC 61076-4-101
Missing information and dimensions per 61076-4-101

RoHS:6/6

Plating:
Signal Contacts:
Termin. area: 2-3 μ m Ni, 0.5-2 μ m Sn
Mating area: 2-3 μ m Ni, 0.65 μ m PdNi with Au-Flash

Information: Anforderungsstufe 2 / class 2 All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances		Scale 2:1
	All Dimensions in mm		Designation ERmet-FS Federleiste B19 <i>ERmet-Female Straight Type B19</i>
e Index	01.02.2018 Date	www.ERNI.com	114111 A3
		Class	ERMB19

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.