




File: E209153



ISO9001:2008 Certified

**Mechanical Specifications (mm)**

	D:	15.0	±	Max
	T:	4.5	±	Max
	Lead Diameter	0.8	±	Nom
	S:	7.8	±	Nom
	L:	45.0	±	Nom
	Coating Lead Run Down (straight Leads)	2.5	±	Max
	B:	4.00	±	Nom
	C:	3.10	±	Nom

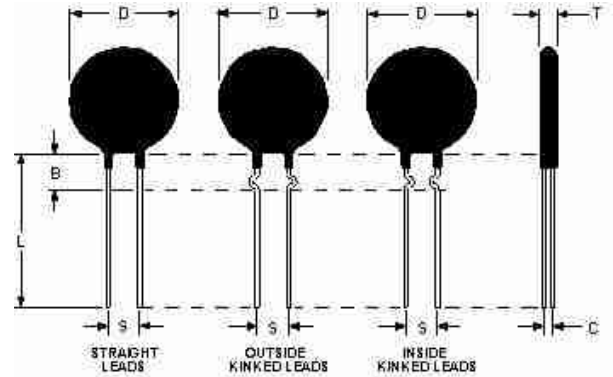

**Electrical Specifications**

	Resistance:	25.0 Ω	±	20 %
	Max Steady State Current upto 65°C:	4.00		A
	Max Rec. Energy Rating:	50		J
	Actual Failure Instantaneous Energy:	105		J
	Resistance @ 100% Max Current:	0.30		Ω
	Resistance @ 50% Max Current:	0.68		Ω
	Body Temperature at 100% Max Current:	172.00		°c
	Dissipation Constant:	15.9		mw/°c
	Thermal Time Constant:	45		Sec.
	Material Type (for Beta and Curve):	H		

<b>SL15 25004</b>	
Date: 10/08/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A