



DATE	REV	ECN	APP'D. BY
10/20/20	A0	RELEASED	ADB
-	-	-	-

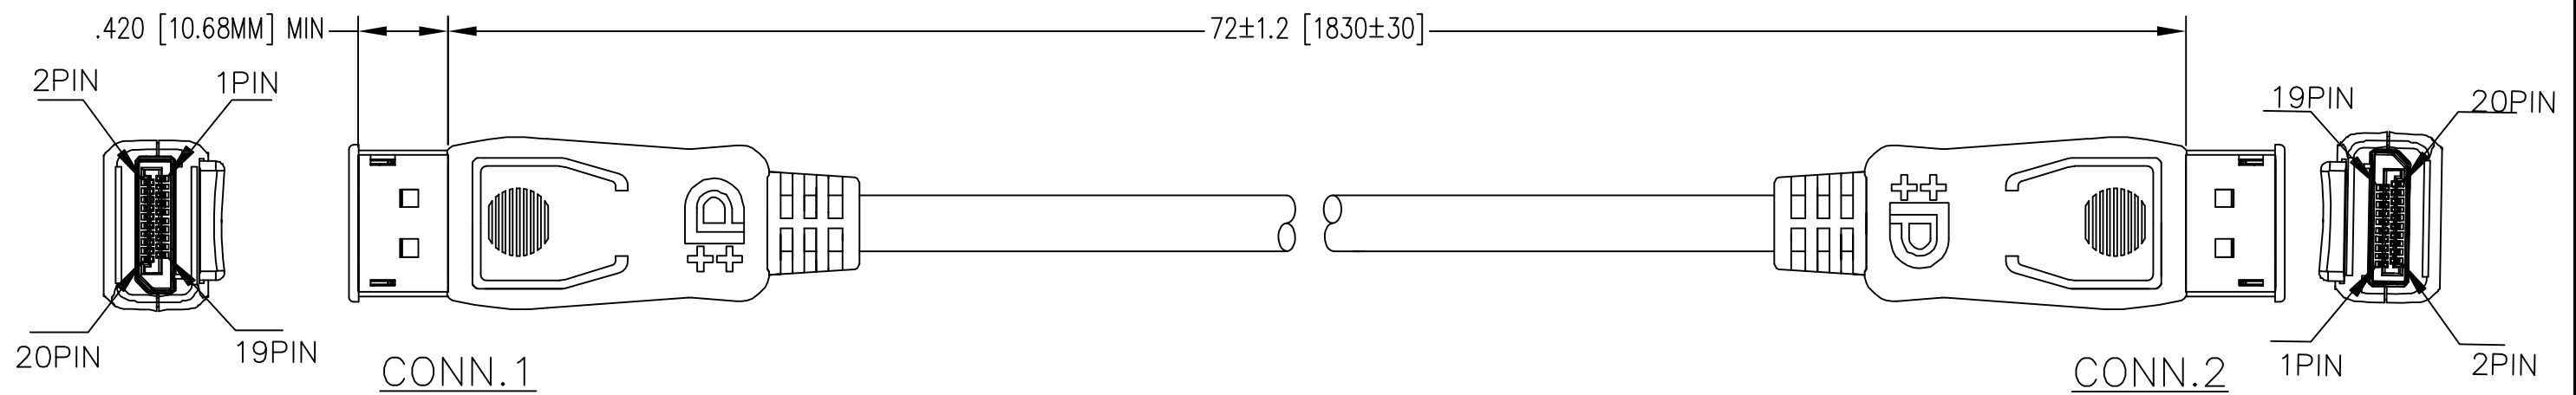


PIN ASSIGNMENT

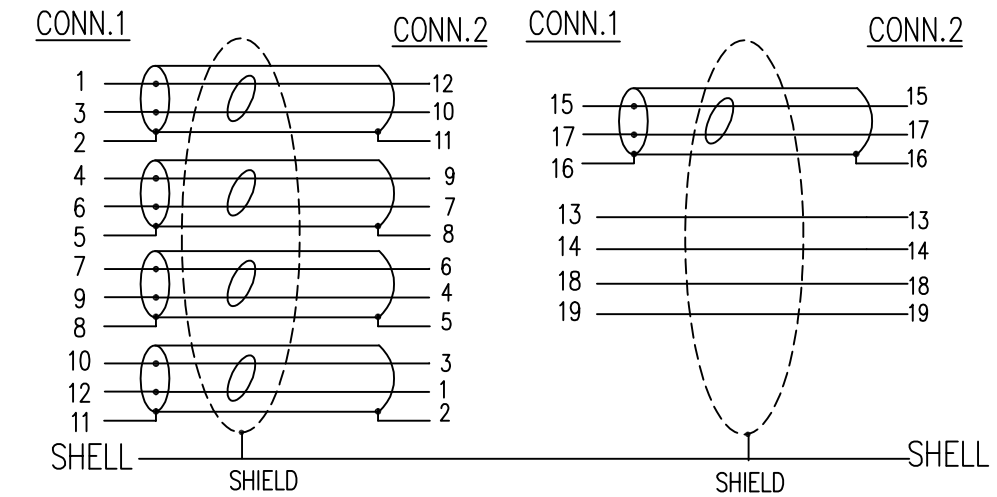

NOTES:

- COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION.
- CONNECTOR COMPONENTS:  
 TRANSPARENT DUST COVER  
 INSIDE MOLDING: LDPE  
 STRAIN RELIEF: 45P PVC, BLACK  
 OUTSIDE MOLDING: ABS, BLACK  
 SHELL PLATING: GOLD FLASH  
 CONTACT: GOLD PLATING  
 CABLE: DP1.4  
 [30AWG(7/0.10TC)+EAM]\*5P+30AWG(7/0.10TC)\*4C+AEB(16/10/0.12 85%AL)  
 OD: 0.24 [6.0] COLOR: BLACK  
 CABLE PRINTING: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80°C 30V VW-1
- ELECTRICAL TESTING:  
 100% OPEN & SHORT & CONTINUITY WIRE TEST  
 CONTACT RESISTANCE: 2 OHM MAX.  
 INSULATION RESISTANCE: 10M OHM MIN.  
 HI-POT:100V DC/10ms
- PACKAGING:  
 ONE CABLE PER BAG



P/N	LENGTH
BC-4D4D006F	72 [1830]

THIRD ANGLE PROJECTION


DO NOT SCALE DRAWING  
 DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS: INCHES [METRIC]  
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°  
 SHEET NO. 1 OF 1

206 Van Vorst Street  
 Jersey City, NJ 07302  
 +1 201 432 0463  
 http://www.belfuse.com

TITLE: DISPLAY PORT 1.4 CABLE, MALE TO MALE, 6 FEET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: JE	DATE 10/07/20
APPD BY: ADB	DATE 10/20/20
DWG NO. CT999226	REV. A0



ASSEMBLY FORMAT REV. 6/3/05