


# Technical Data Sheet

# Rosenberger

Cable assembly  
RPC-2.92 Plug / PRC-2.92 Plug RA – RTK 106

## LU1-054-XXX

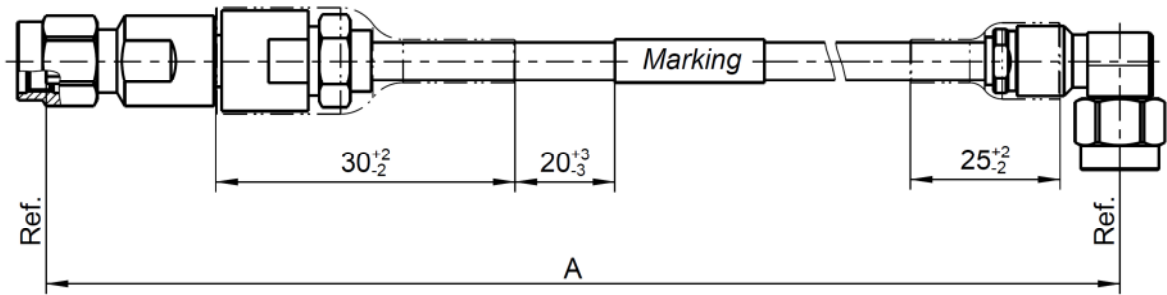

All dimensions are in mm; tolerances:  $\pm 3\text{mm}$  for  $A \leq 300\text{ mm}$ ;  $\pm 1\%$  for  $A > 300\text{ mm}$

### Available variants

Type	max. Insertion loss at 40 GHz	Marking	Weight (g) / pce
LU1-054-XXX	$\leq 0.00285\text{ dB/mm} * A\text{ mm} + 0.6\text{ dB}$	ROSENBERGER YYYY-WW LU1-054-XXX FAC-RRRRRRR ssss	$0.0361\text{ g/mm} * A\text{ mm} + 18.4.\text{ g}$

XXX – length in mm = A  
WW – week      YYYY – year      ssss – serial no.      FAC – Factory Code      RRRRRRR – lot nr.

Note: max. Insertion Loss:  
First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor  
Weight:  
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

### Assembly parts

Connector left	RPC-2.92 plug	02S121-2U1S2
Connector right	RPC-2.92 plug right angle	02S221-2U1S3
Cable	RTK 106	

### Electrical data

Impedance	50 $\Omega$
Frequency	DC to 40 GHz
Return loss <sup>1</sup>	$\geq 15.6\text{ dB}$ , DC to 40 GHz
Insertion loss <sup>1</sup>	see table available variants

Individual testing and documentation:  
Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

<sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

### Mechanical data

Minimum bend radius:			
Single	6.35 mm	Multiple	38.4 mm

### Environmental data

Temperature range	-40°C to +85°C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	27.06.17	Herbert Babinger	27.07.17	b00	17-s229	M.Ruf	27.07.17

Rosenberger Hochfrequenztechnik GmbH & Co. KG  
P.O.Box 1260 D-84526 Tittmoning Germany  
[www.rosenberger.de](http://www.rosenberger.de)

Tel. : +49 8684 18-0  
Email : [info@rosenberger.de](mailto:info@rosenberger.de)

Page  
1 / 1