



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED. © COPYRIGHT - TE Connectivity

REVISIONS				
REV	DATE	BY	CHK	APP'D
H2	05SEP2017	HC	KR	

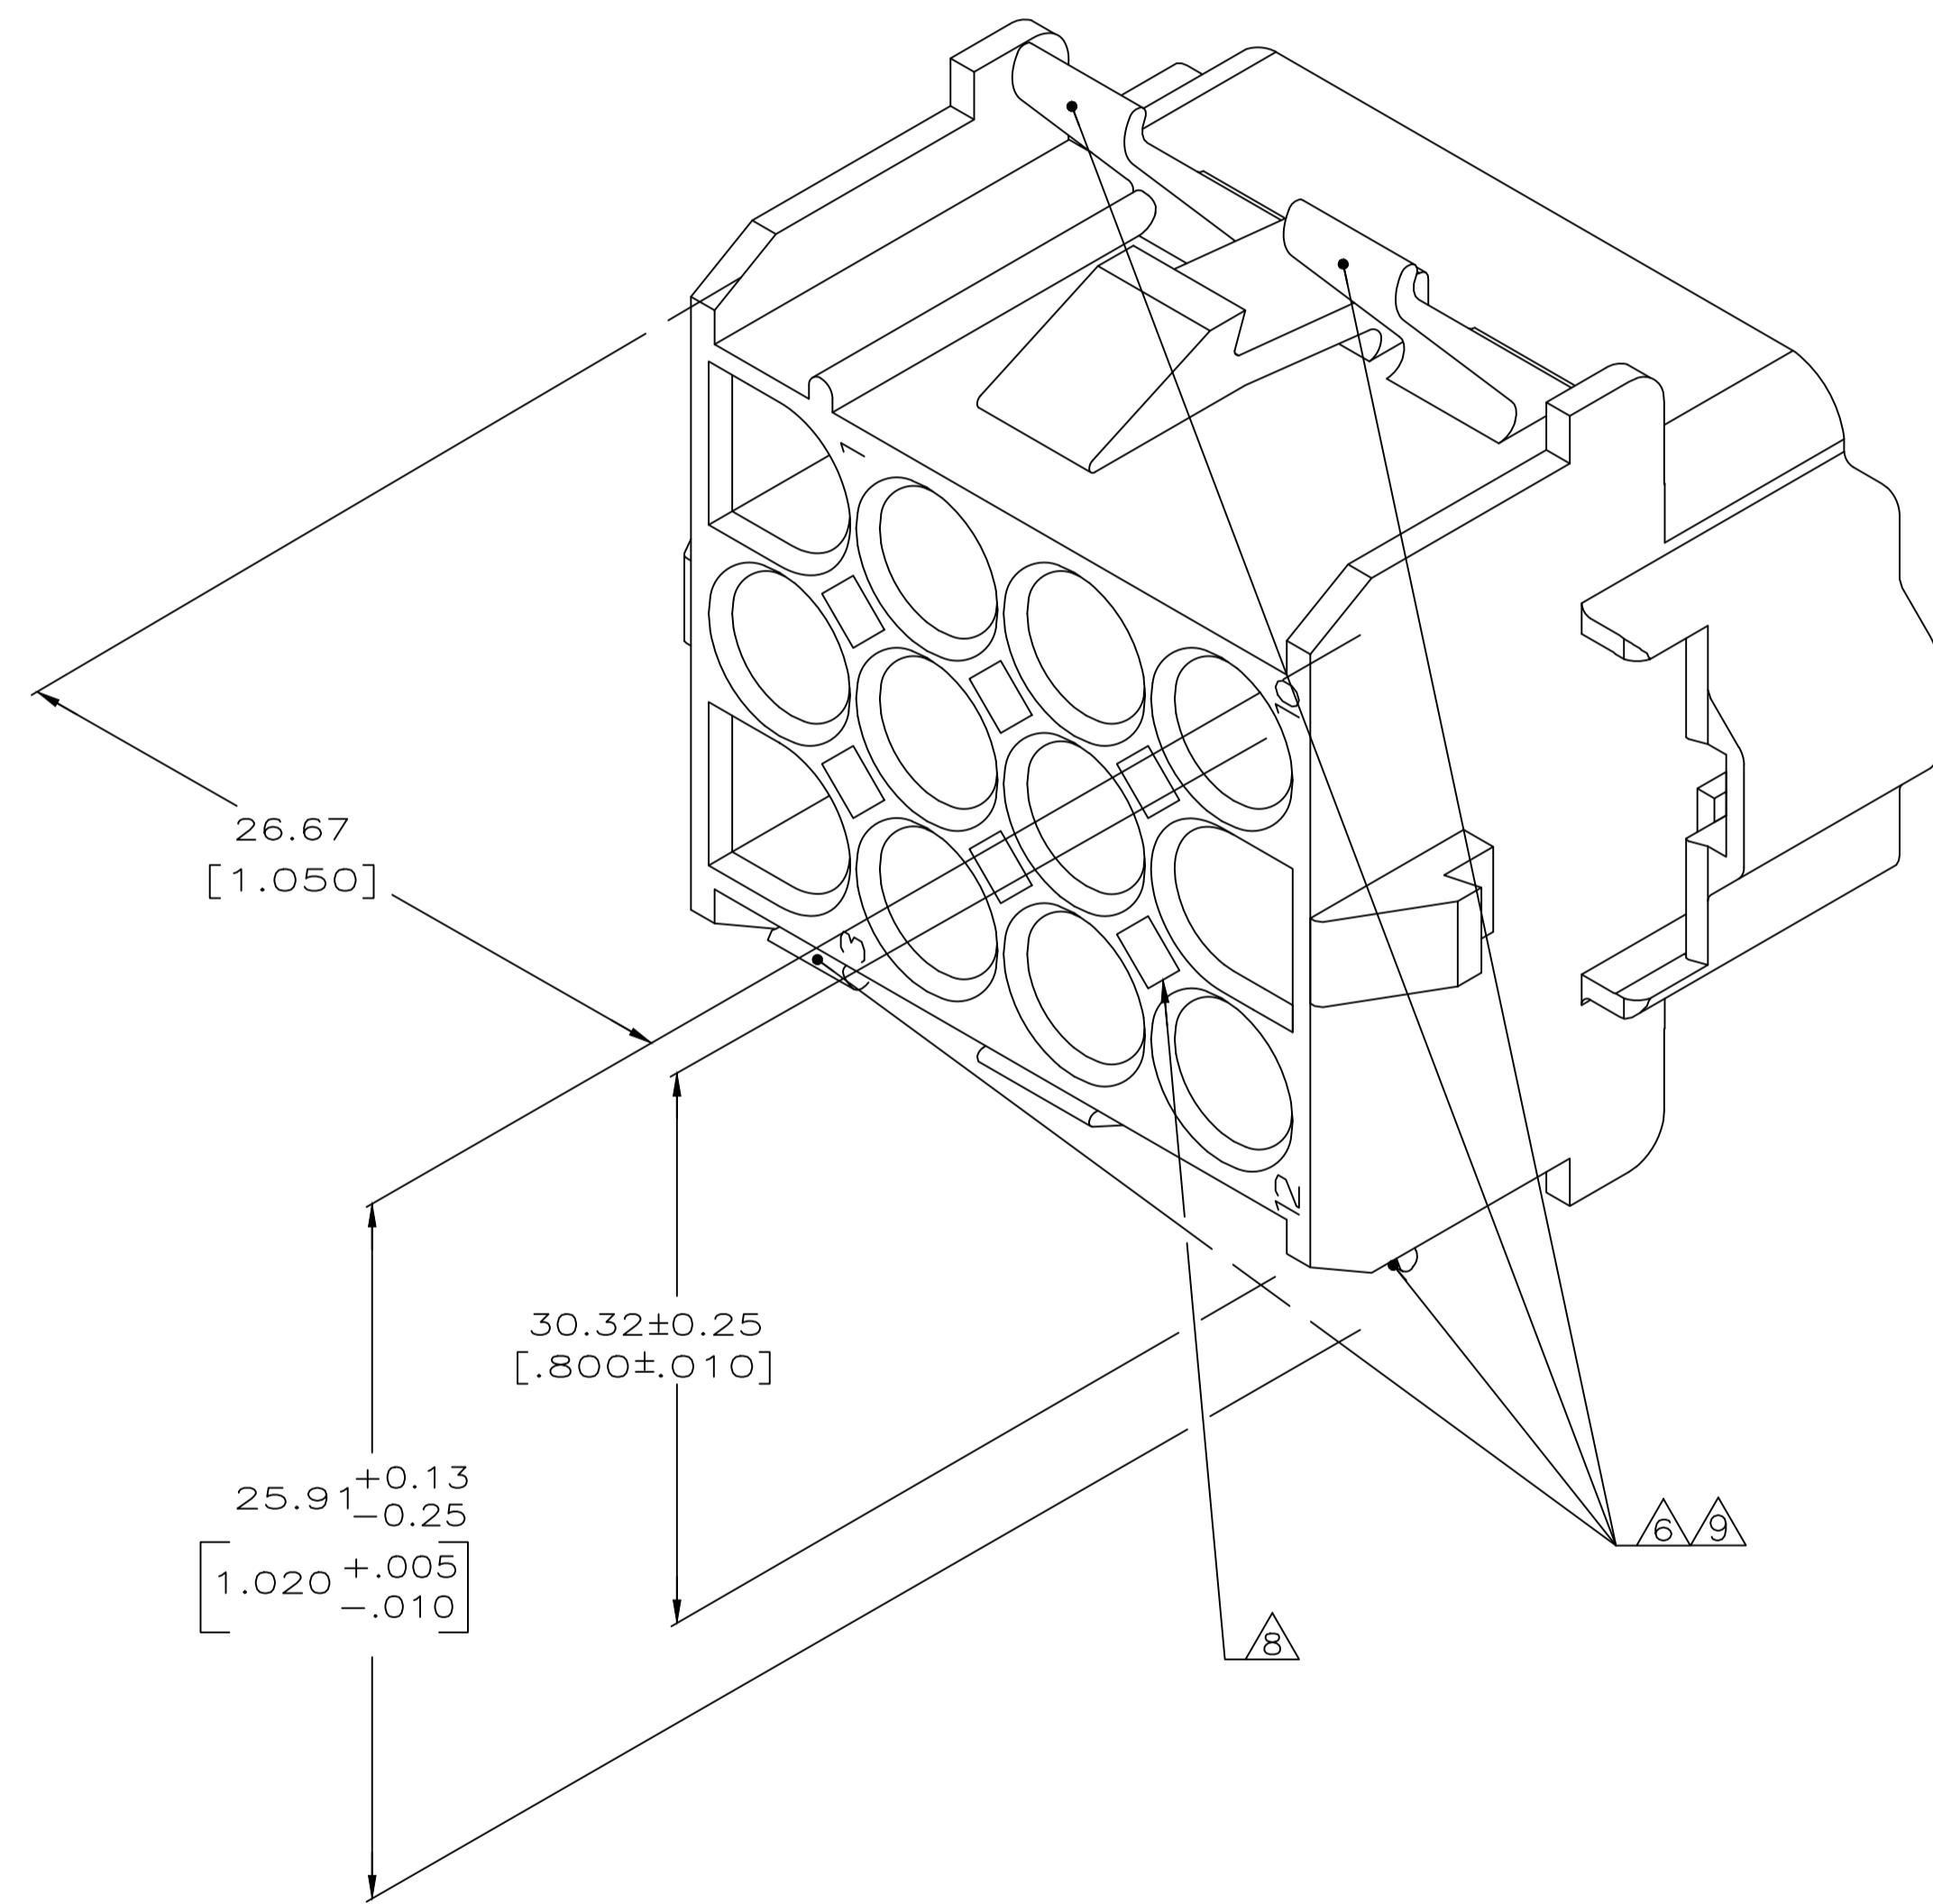

- MUST BE ASSEMBLED WITH CAP REAR P/N 770056-1 BEFORE MATING. KIT P/N IS 770029-1.
- RECOMMENDED PANEL THICKNESS 0.76-2.29 [.030-.090].
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- AMP LOGO LOCATED ONCE ON ANY INDICATED SURFACE FARSIDE.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- OPTIONAL CONSTRUCTION PROVIDES ROUND MATERIAL REDUCTION CORING HOLES.
- CSA LOGO LOCATED ONCE ON ANY INDICATED SURFACE

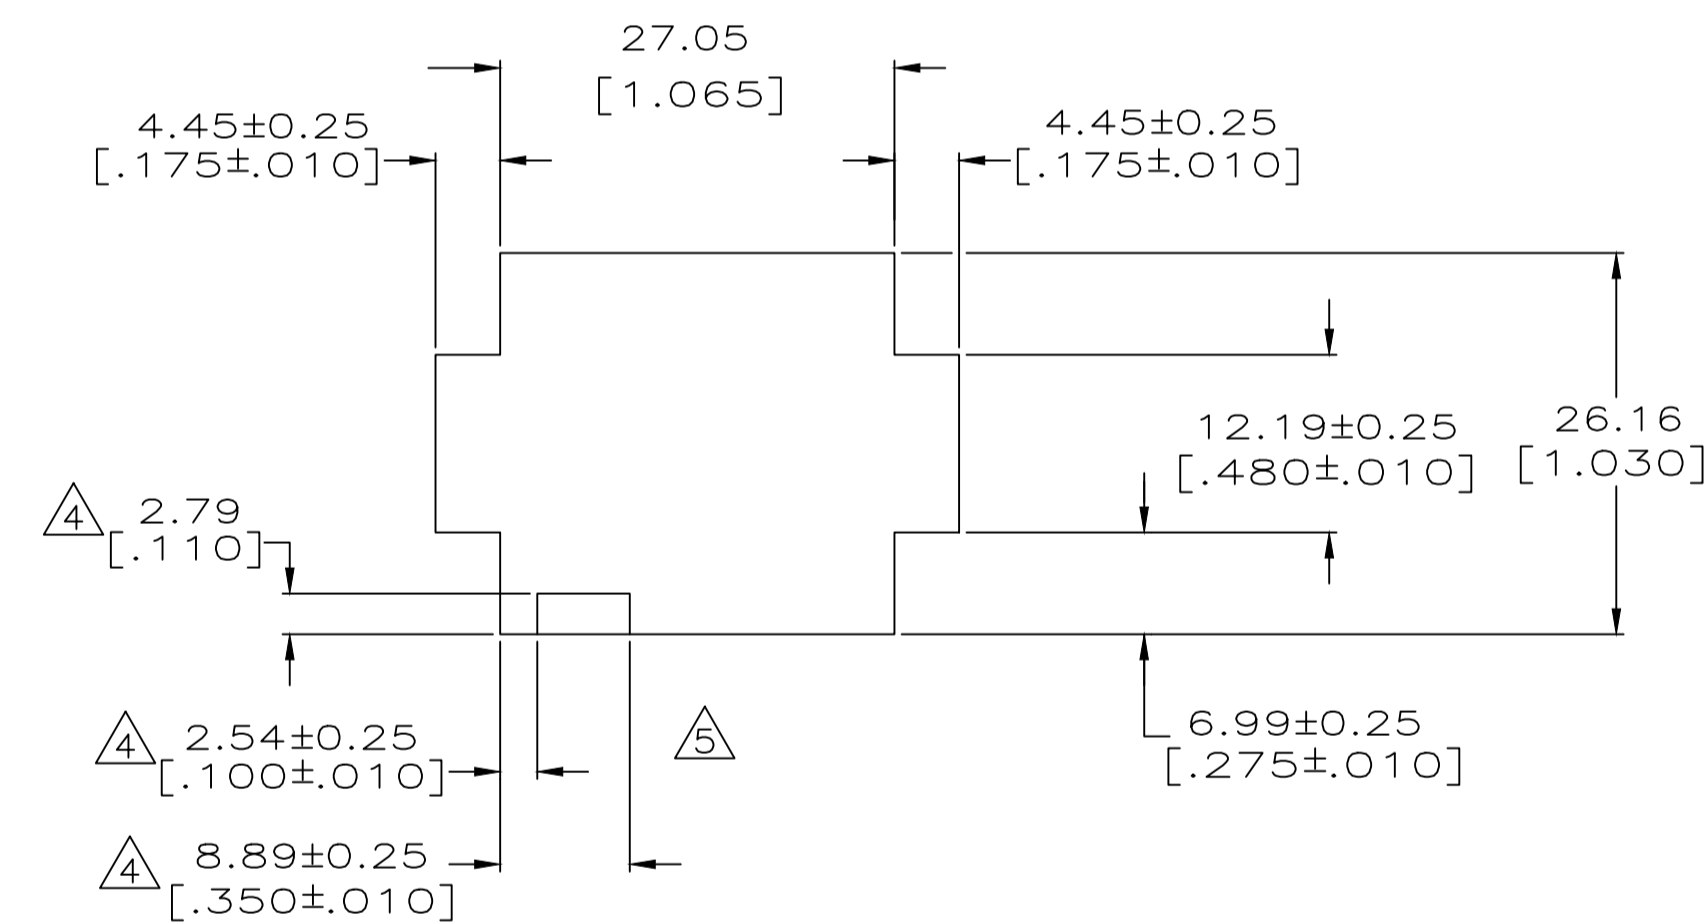

RECOMMENDED PANEL CUTOUT (HOUSING ENTRY SIDE) SCALE 2:1



770055-1 PART NUMBER

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: K. SALMON 1-15-92	TE Connectivity	
DIMENSIONS: INCHES		CHK: R. SWING 1-15-92	NAME: CAP FRONT, 12 CIRCUIT, UNIVERSAL MATE-N-LOK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: -	PRODUCT SPEC: -	
0 PLC	± -	APPLICATION SPEC: -		RESTRICTED TO: -
1 PLC	± -	SIZE: A1		CAGE CODE: 00779
2 PLC	± -	DRAWING NO: C=770055		SCALE: 5:1
3 PLC	± 0.13 [.005]	WEIGHT: 0.000000		SHEET 1 OF 1
4 PLC	± -	MATERIAL: NYLON,UL94V-0, FINISH: -		REV: H2
ANGLES	± -	CUSTOMER DRAWING		